


RECOMMENDED PCB LAYOUT  
PCB THICKNESS IS 1.60mm  
DEFAULT TOLERANCE ±0.05

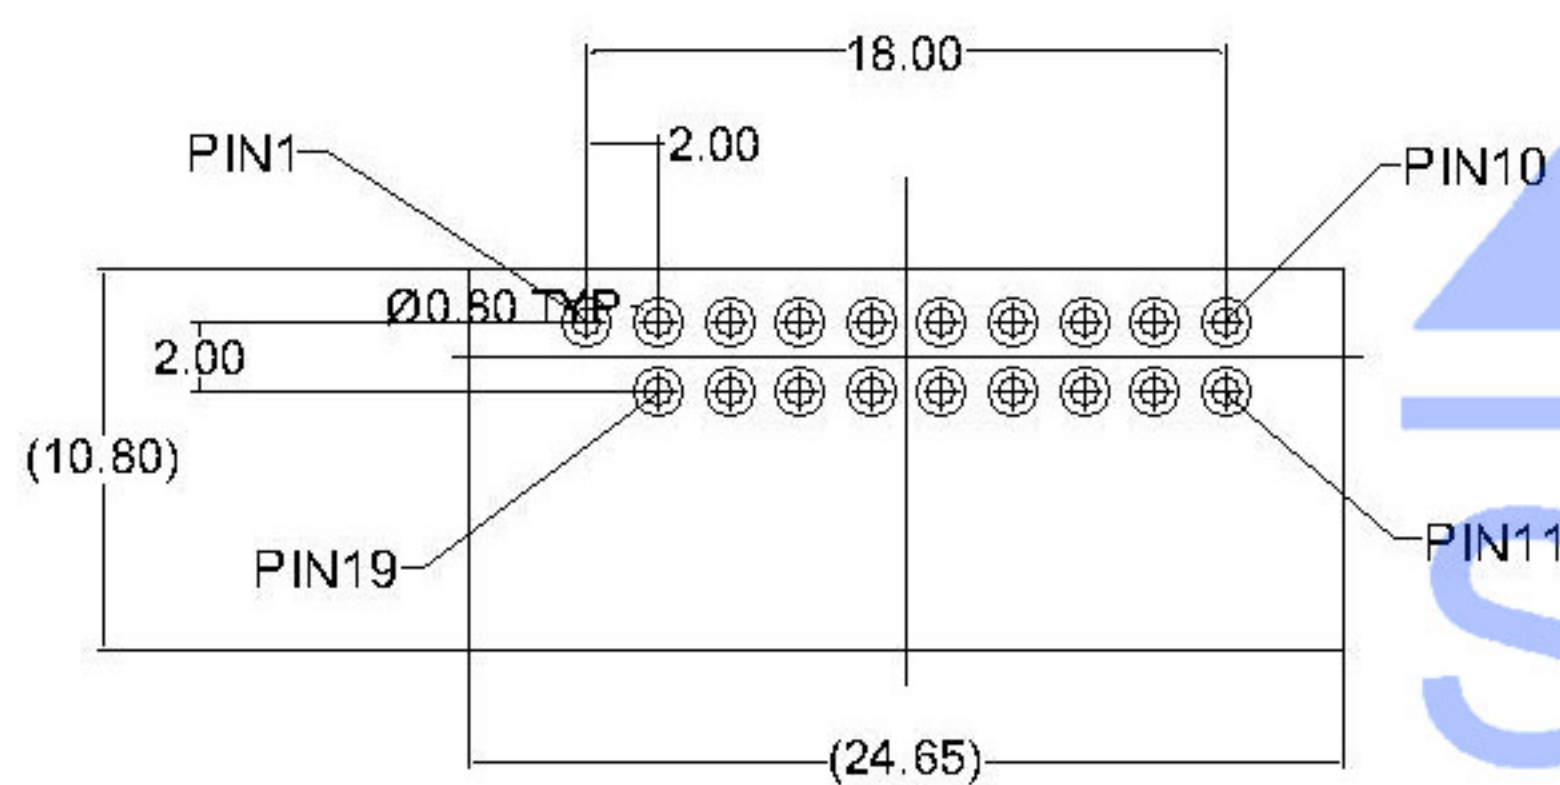


RECOMMENDED PCB LAYOUT  
PCB THICKNESS IS 1.60mm  
DEFAULT TOLERANCE ±0.05

# XKB SWITCH CONNECTOR

## NOTES:

- ELECTRICAL:
  - CURRENT RATING: 1.5AMP;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE: -25°C ~ +75°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

## 4. PART NO.

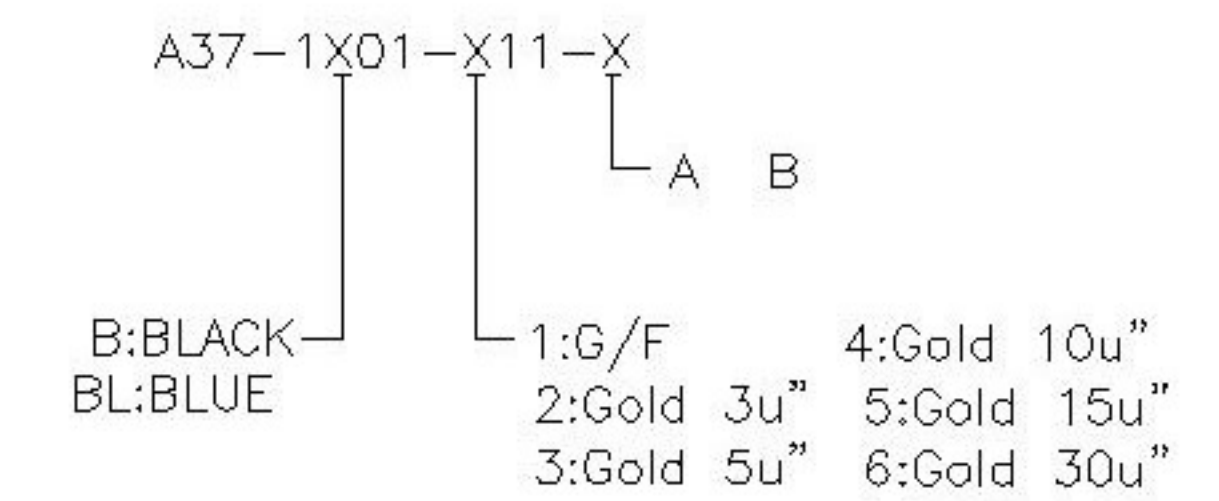

REVISIONS					UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE:		
ΔX					ANGLAR		DATE	VIEW:	PART NO.:		
ΔX					$L \leq 4$	±5°	DATE	UNIT: mm	DWG NO.:		
ΔX					$4 < L \leq 16$	±0.2	DATE	SIZE: A4	A37-1X01-X11-X		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	$16 < L \leq 63$	±0.3	DATE		WEIGHT		
					$L > 63$	±0.4	DATE		SHEET		
						±0.5			REVISION		
									A0		
					<b>XKB INDUSTRIAL PRECISION CO., LIMITED</b>				1.0g	1/1	A0

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)