

ATTENUATORS


Type N, up to 18 GHz, 2 Watts

SPECIFICATIONS:

Models: N


RoHS
Compliant

Electrical:	
Frequency Range _____	DC - 18 GHz
Standard Freq. Values _____	2.5, 6, & 18 GHz
Standard dB Values* _____	0 - 10, 12, 15, 20, 30, 40, 50 & 60 dB
Attenuation Accuracy _____	In 1 dB Increments
0 - 6 dB _____	±0.3 dB
7 - 20 dB _____	±0.5 dB
21 - 30 dB _____	±0.75 dB
31 - 60 dB _____	±1.5 dB
VSWR	
DC - 4 GHz _____	1.15:1 Max
4 - 8 GHz _____	1.20:1 Max
8 - 12.4 GHz _____	1.25:1 Max
12.4 - 18 GHz _____	1.35:1 Max
Input Power _____	2 Watts Avg. @ 25°C
	Derated Linearly to 0.5 Watts @ +125°C
Peak Power _____	250 Watts Max.
	(5uSec Pulse, .05% Duty Cycle)
Impedance _____	50 Ohms
Operating Temp Range _____	-65°C to +125°C
Mechanical:	
Type N Connectors _____	Passivated Stainless Steel
	Mates with MILSTD-348
Conductors _____	Gold Plated Beryllium Copper

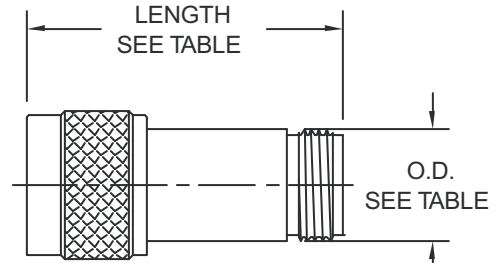

Base Model Number	Connector Configuration	DIA.		LENGTH			
				0 - 30 & 40 dB		31-39, 50 & 60 dB	
		Inches	Millimeters	Inches	Millimeters	Inches	Millimeters
XXN-XX	Male/Female	Ø.62	[15.8]	1.76 ±.03	[44.7 ±0.8]	2.04 ±.03	[51.8 ±0.8]
XXN-XXM	Male/Male	Ø.56	[14.2]	1.82 ±.03	[46.2 ±0.8]	2.11 ±.03	[53.6 ±0.8]
XXN-XXF	Female/Female	Ø.56	[14.2]	1.99 ±.03	[50.5 ±0.8]	2.28 ±.03	[57.9 ±0.8]

HOW TO ORDER:

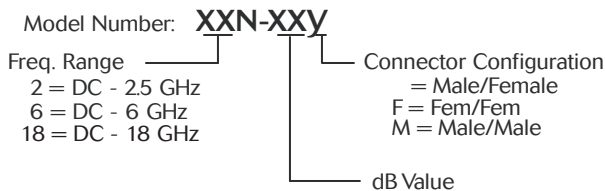

Ordering Examples:

Model Number: **18N-20**
DC - 18 GHz; 20 dB; Type N - Male/Fem

Model Number: **6N-6F**
DC - 6 GHz; 6 dB; Type N - Fem/Fem

Model Number: **6N-3M**
DC - 6 GHz; 3 dB; Type N - Male/Male

Model Number: **2N-30**
DC - 2.5 GHz; 30 dB; Type N - Male/Fem

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

*Other dB values, units that operate over a more specific frequency band and/or offer very low return loss (VSWR); as well as units with nickel plated brass connectors are available.

18N-ATT: REV J (M)



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet-sales@eroflex.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Attenuators](#) category:

Click to view products by [Aeroflex](#) manufacturer:

Other Similar products are found below :

[MAATCC0010](#) [HMC305SLP4ETR](#) [MAAD-009195-000100](#) [MAADSS0012TR](#) [TGL4201-02](#) [ATN3590-15](#) [20-50TPC](#) [D10AA5Z4](#)
[HMC346LP3TR](#) [18AH-01](#) [18AH-03](#) [18AH-08](#) [ATN3590-09](#) [20-50RP](#) [MASW-008322-000000](#) [MAAVSS0004](#) [PCAF-10](#) [EXB-](#)
[24AT9AR5X](#) [ATN3580-06](#) [HMC539ALP3ETR](#) [HMC291SETR](#) [HMC941A-SX](#) [HMC1119LP4METR](#) [F1977NBGI8](#) [HMC802ALP3ETR](#)
[HMC-VVD106-SX](#) [WA04P006XCTL](#) [SKY12408-321LF](#) [TGL2226](#) [WA04P005XBTL](#) [EXB-14AT3AR3X](#) [HMC-VVD104-SX](#) [SKY12236-](#)
[11](#) [MAATSS0018TR-3000](#) [HMC656-SX](#) [WA04P001XBTL](#) [MAAV-007941-TR3000](#) [WA04P004XBTL](#) [HMC425ALP3ETR](#)
[WA04P002XBTL](#) [MAT10010](#) [MAT10040](#) [EXB-24N182JX](#) [EXB-24N181JX](#) [EXB-24N183JX](#) [20-50TPR](#) [HMC941A](#) [PAT0816-C-0DB-T5](#)
[PAT0816-C-8DB-T5](#) [PAT0816-C-3DB-T5](#)