


Specification:

- 1) Rating (if not described next to the switch):
 - () 6 A 125 VAC; 3 A 250 VAC
 - (A) 10 A 125 VAC; 6 A 250 VAC
- 2) Contact Resistance: 35 mΩ max.
- 3) Insulation Resistance: 500 VDC 100 MΩ min.
- 4) Dielectric strength: 1500 VAC, 1 minute
- 5) Operating temperature: -30°C ~ +80°C
- 6) Electric Life: 10000 cycles

RSSM102A2C7BK/WH

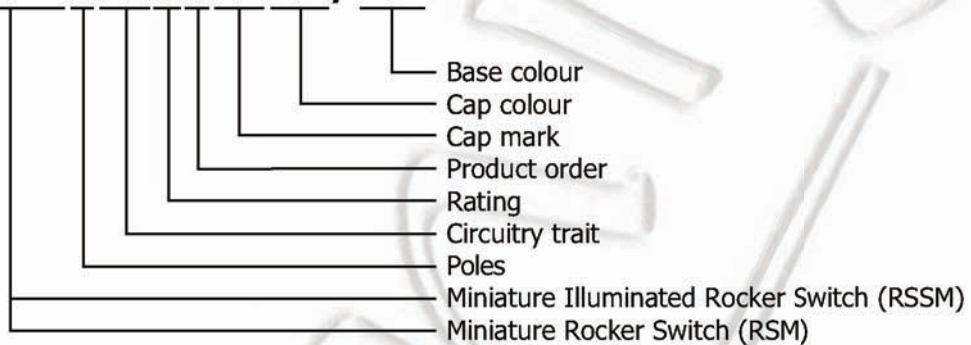

CIRCUITRY TRAIT

01	ON	-	OFF
02	ON	-	ON
11	(ON)	-	OFF
12	ON	-	(ON)
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)

() indicates momentary


CAP COLOUR

RD	red
GN	green
OR	orange
BU	blue
WH	white
BK	black
YL	yellow

BASE COLOUR

WH white
GY gray
YL yellow
omitted when
standard colour (black)

TERMINAL OPTIONS

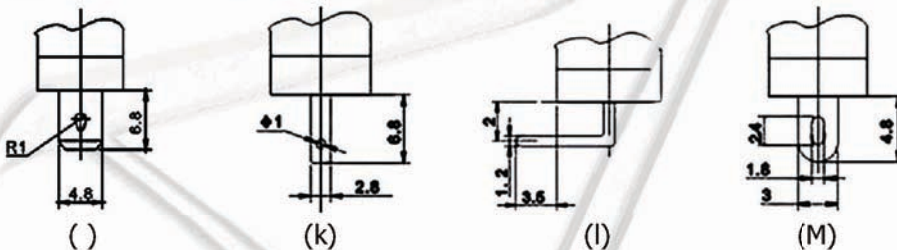


PROTECTIV CAP



RSC-07


CAP MARKING

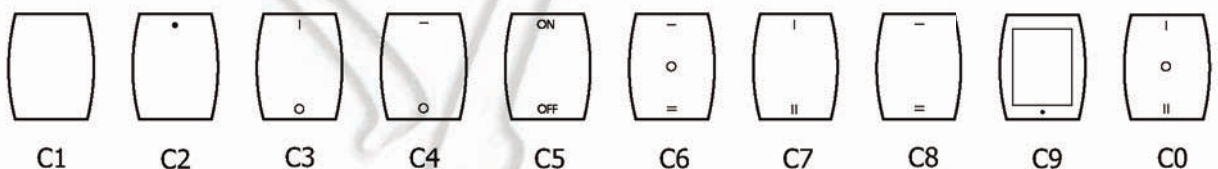


Ninigi




RSM101 ON-OFF
RSM111 (ON)-OFF
RSM101A ON-OFF
RSM111A (ON)-OFF
 SPST 2P

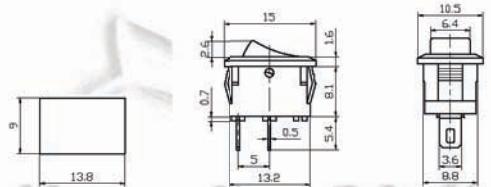


RSM102 RSM102A ON-ON
RSM103 RSM103A ON-OFF-ON
RSM112 RSM112A ON-(ON)
 SPDT 3P

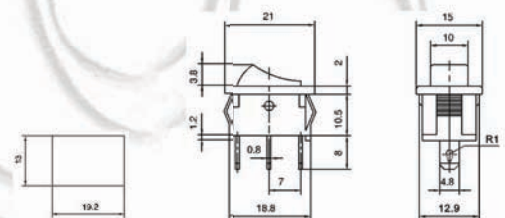


RSSM101 ON-OFF
RSSM101A
 SPST 3P

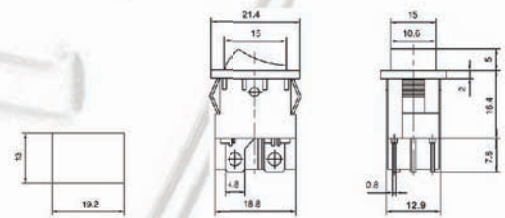


RSSM201 ON-OFF
RSSM201A ON-OFF
RSSM2012 ON-OFF
RSSM201A2 ON-OFF
 DPST 4P

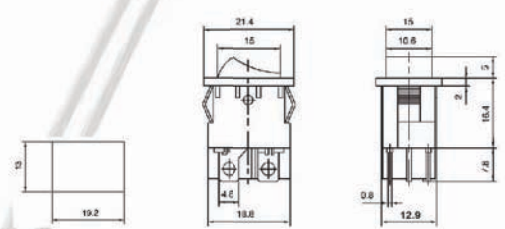

RSM1022 ON-ON
RSM1032 ON-OFF-ON
RSM1132 ON-OFF-(ON)
RSM1232 (ON)-OFF-(ON)
 SPDT 3P

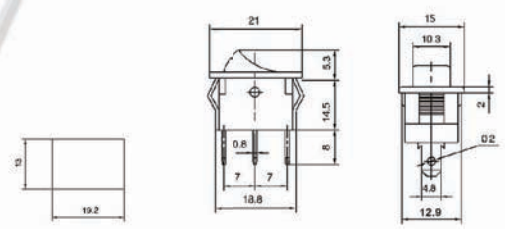


RSM1012 ON-OFF
 10 A 125 VAC; 6 A 250 VAC
 SPST 2P

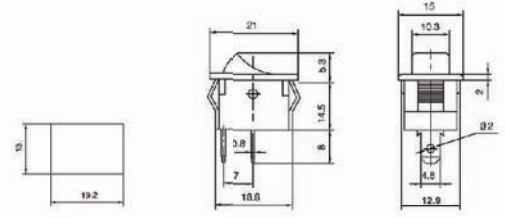


Ninigi




RSM1013 + LED ON-OFF
10 A 125 VAC; 3 A 250 VAC
SPST 4P

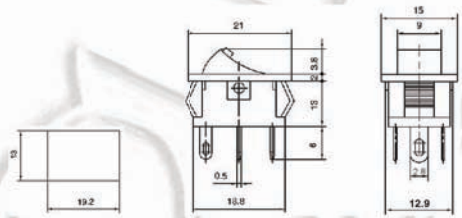


RSM1015 ON-OFF
12 A 125 VAC; 6 A 250 VAC
SPDT 3P

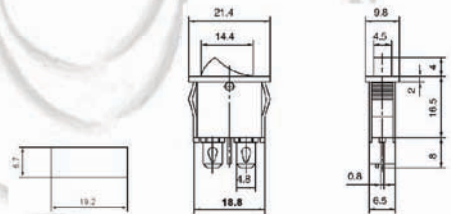


RSM1026 ON-ON
12 A 125 VAC; 6 A 250 VAC
SPDT 3P

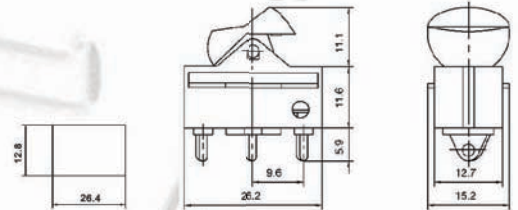


RSM201 ON-OFF
RSM211 (ON)-OFF
RSM201A ON-OFF
RSM211A (ON)-OFF
DPST 4P

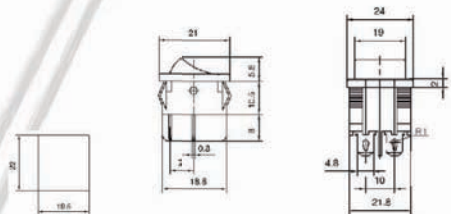

RSM202 ON-ON
RSM203 ON-OFF-ON
RSM202A ON-ON
RSM203A ON-OFF-ON
DPDT 6P

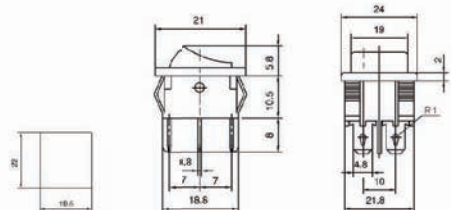


RSM2101 ON-OFF
RSM2111 (ON)-OFF
RSM2101A ON-OFF
RSM2111A (ON)-OFF
DPST 4P

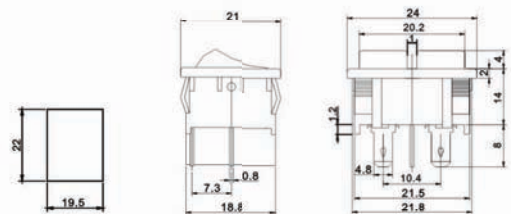


Ninigi




RSM2102 ON-ON
RSM2103 ON-OFF-ON
RSM2102A ON-ON
RSM2103A ON-OFF-ON
 DPDT 6P

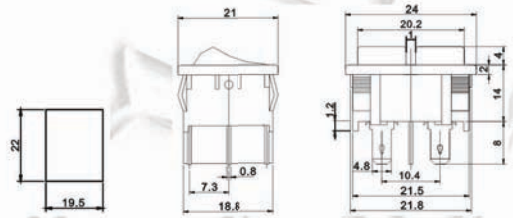


RSSM2101 ON-OFF
 10 A 125 VAC; 6 A 250 VAC
 DPST 6P

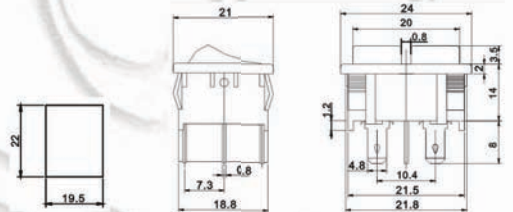


RSSM2101L ON-OFF
 10 A 125 VAC; 6 A 250 VAC
 SPST+LAMP SOCKET

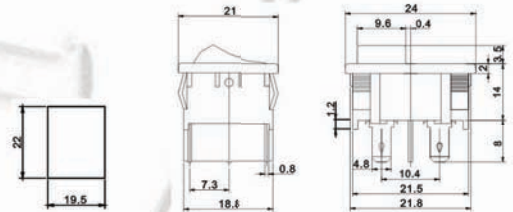


RSM2013 ON-OFF
 10 A 125 VAC; 6 A 250 VAC
 DPST 4P

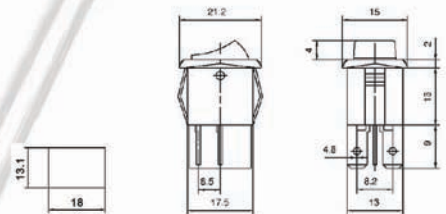

RSM2023 ON-ON
RSM2033 ON-OFF-ON
 6 A 125 VAC; 3 A 250 VAC
 DPDT 6P

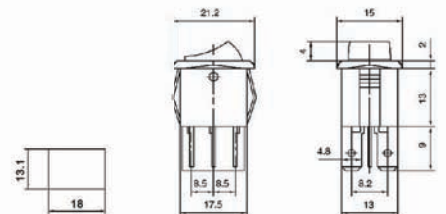


RSSM2014 ON-OFF
RSM2014 ON-OFF
 10 A 125 VAC; 6 A 250 VAC
 DPST 4P

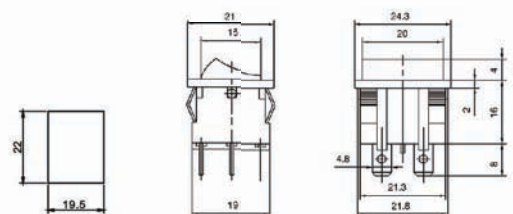


Ninigi



RSM2024 ON-ON
10 A 125 VAC; 6 A 250 VAC
DPDT 6P

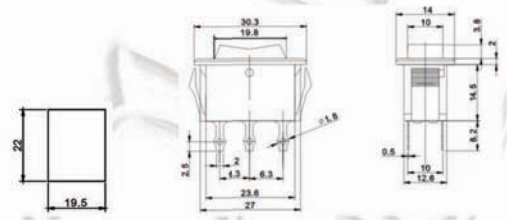

RSSM1018 ON-OFF
12 A 125 VAC; 6 A 250 VAC
SPDT 3P

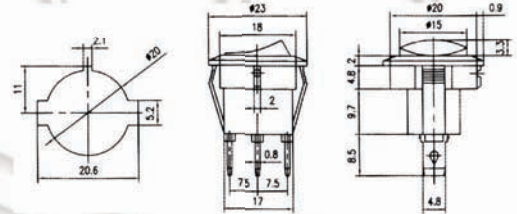

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rocker Switches](#) category:

Click to view products by [Ninigi](#) manufacturer:

Other Similar products are found below :

[VKD2GHNB-00000-000](#) [VSD2GNNB-00000-000](#) [6-1571986-5](#) [6-1571986-9](#) [632422-4B-KD](#) [7036WWCDBX653+U622](#) [8055K52Z7V](#)
[8138K20E6M50](#) [FMC18A2200002](#) [84206L](#) [84312LX](#) [PREDD4-07F-BB0FW](#) [PREDD5-07F-BB0GW](#) [PRFDD1-16F-BB000](#) [PRFDD3-16F-](#)
[BB000](#) [1-1634201-0](#) [999-16702-001](#) [A101J2ZQ004](#) [A101J4ZQ004](#) [A101J51CB0004](#) [A107J51ZQ0004](#) [A201J1AQ004](#) [A201J1AV2Q004](#)
[A201J3ZB004](#) [A201J50ZQ004](#) [A203J51ZQ0004](#) [A226L11YZQ](#) [A22L11A](#) [A435S1YZQ](#) [H8500XBBBBL-A](#) [H8653VBBG2577W](#)
[HB130CHNWWNAAC](#) [1251.0303](#) [AE205J60V3B004](#) [RH110C2NBB](#) [1352.0107](#) [1363.0201](#) [AML25GBF2AA03GR](#) [1571099-3](#) [1571987-4](#)
[1571987-5](#) [1571989-7](#) [B123J77V7B2](#) [B226J50W4Q22P](#) [B433J37ZQ22M](#) [160212E](#) [1801.1164](#) [1831.1102](#) [1833.3402](#) [1837.1118](#)