

RTS-02 Series

Characteristic

RTS-02 high power resistors are made in a thick film technology, on a 2mm stainless steel substrate. Resistors are characterized by a high power at small size, and high resistance to a temporary overloads. RTS-02 resistors have very low inductance, what makes them useful at high frequency circuits. Construction of element and standard dimensions allows for a quick installation on heatsink. RTS-02 series elements have outputs in the form of contact/solder fields, soldered wires, connectors, or screw terminals


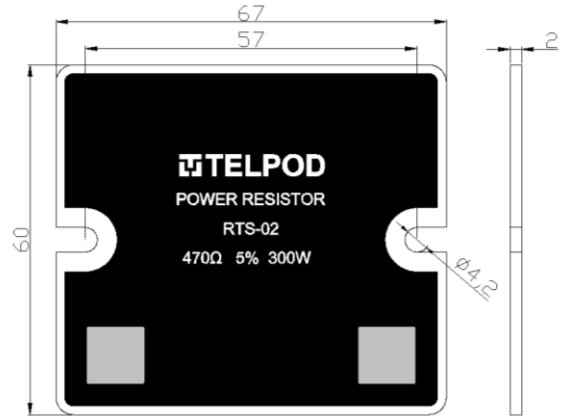


Fig. 1. Preview with dimensions [mm]

Parameter	Value
Nominal resistance	E24 series
Range of available resistances	0,1 Ω ... 1 M Ω
Resistance tolerance	± 5 , $\% \pm 10$ %
Rated power (on heatsink)	300, 600W
Dielectric layer breakdown voltage	> 2,5 kV
Temperature coefficient of resistance (TCR)	± 100 ppm/ $^{\circ}$ C
Max. element temperature (on surface)	400 $^{\circ}$ C
Max. element temperature (with soldered connectors or wires)	170 $^{\circ}$ C

Product marking

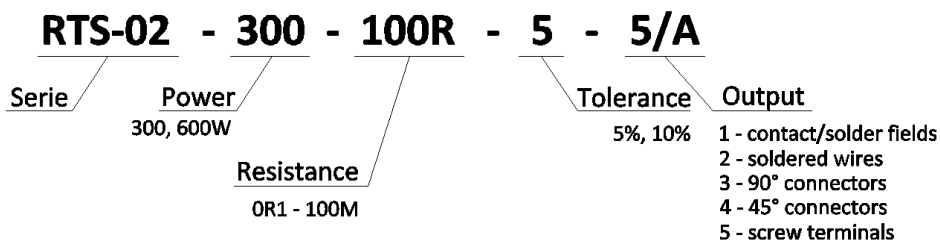

RTS-02 Series

Terminal types


RTS-02- ... -1

Contact / solder fields




RTS-02- ... -2

Soldered wires

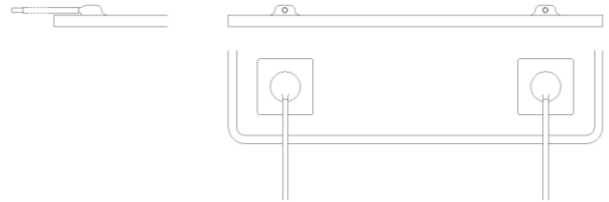


RTS-02- ... -3/4.8

4.8 connectors at 90°

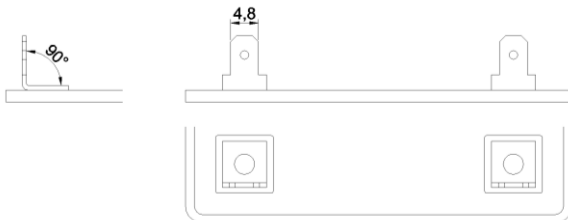


RTS-02- ... -3/6.3

6.3 connectors at 90°

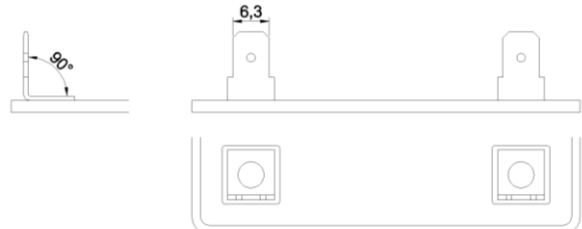


RTS-02- ... -4/4.8

4.8 connectors at 45°

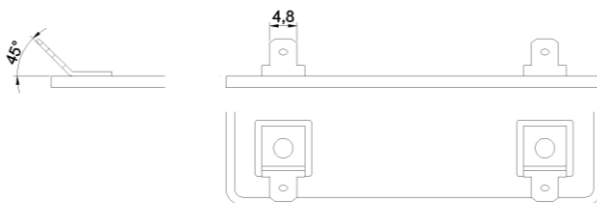


RTS-02- ... -4/6.3

6.3 connectors at 45°

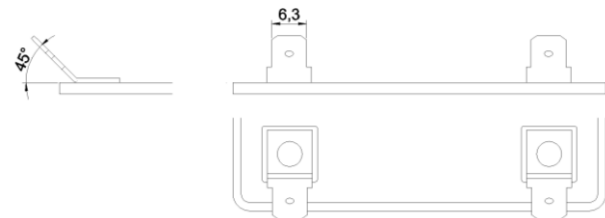


RTS-02- ... -5/A

Screw connectors with the nuts

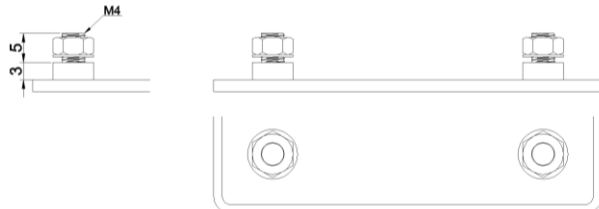

RTS-02- ... -5/B

Screw connectors with the screws

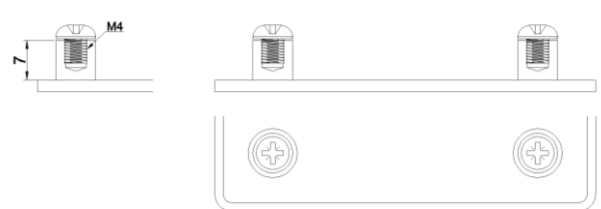

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wirewound Resistors - SMD category:](#)

Click to view products by [Telpod manufacturer:](#)

Other Similar products are found below :

[SMW5120RJT](#) [SMW518RJT](#) [SMW524RJT](#) [SMW52R2JT](#) [SMW530RJT](#) [WSM24R99FLFTR](#) [RWS5 R47 J B](#) [RWS5 R68 F B](#) [SMW516RJT](#)
[SMW52R7JT](#) [SMW57R5JT](#) [SMW5R33JT](#) [SMW5R39JT](#) [SMW551RJT](#) [SMW5R11JT](#) [RWS5 82R F B](#) [RWS5 1R F B](#) [RWS5 120R F B](#)
[RWS5 10R F B](#) [RWS5 100R J B](#) [SMW51R2JT](#) [SMW512RJT](#) [ACS-10S-15R-J](#) [PRZDAWJW101B00](#) [SMW3300RJT](#) [RW7S0FB180RJET](#)
[RW5S0FA470RJET](#) [RW7S0FB4K70JET](#) [RW7S0FB4K70FET](#) [RWS5 1R J B](#) [RWS5 33R J B](#) [QL0000J0100200](#) [QL0000J0220200](#)
[QL0000J0470100](#) [QL0000J047J100](#) [QL0050J0362000](#) [QL0050J0470000](#) [R100W-10R](#) [R100W-22R](#) [R150W-470R](#) [HEWRB0J0220600](#)
[R200W-22R](#) [R50W-10R](#) [R50W-22R](#) [R50W-2R2](#) [R80W-47R](#) [SMW5R51JT](#) [SMW5R36JT](#) [SMW5R24JT](#) [SMW591RJT](#)