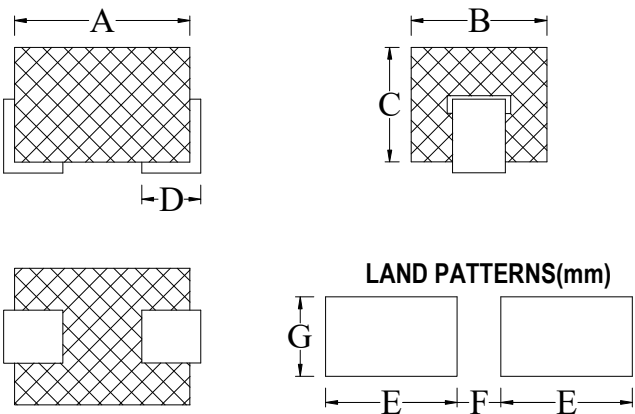


COMMODITY	S.M BEAD		SPEC NO.	SP-060927089
ITEM	SMB 403025	Green	A	TRR-002

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	4.00	±0.15
	B	3.10	±0.10
	C	2.60	±0.10
	D	1.35	±0.15
	E	3.00	REF.
	F	1.0	REF.
	G	1.8	REF.
	H		
	I		
	J		


(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE at 1	27 Min	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer.
IMPEDANCE at 2	47 ± 20	<input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter.
TEST FREQUENCY at 1	25 MHz	<input type="checkbox"/> HP-4286A RF L.C.R. Meter.
TEST FREQUENCY at 2	100 MHz	<input type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer.
IDC	5 Max. A	<input type="checkbox"/> ZENTECH 101 L.C.R. Meter.
		<input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.
		<input type="checkbox"/> ZENTECH 1320 BIAS CURRENT.
		<input type="checkbox"/> ZENTECH 502AC Resistance Merter.
		<input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.

REMARK

1. $\Delta T = 40^{\circ}\text{C}$ rise typ at IDC .
2. Wire 0.2 T.C.W×1.27×9mm×1Ts .

COMMODITY	S.M BEAD	SPEC NO	SP-060927089
Type	SMB 403025	A	TRR-004

Typical Impedance v.s. Frequency Curve

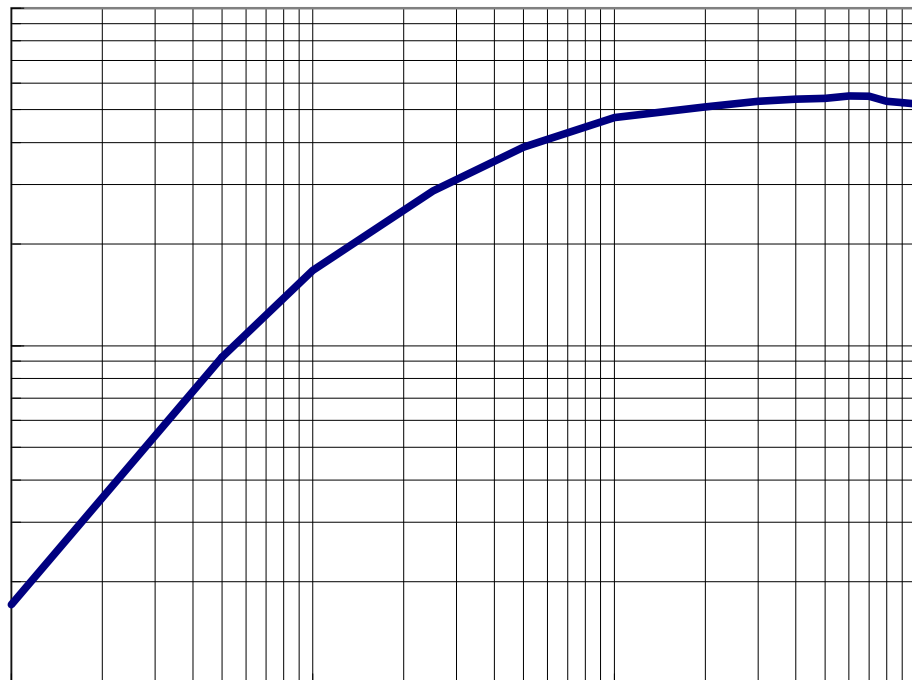

Test Instrument

HP-4286A RF L.C.R. Meter.

Testing Condition

Temperature 25 to 28

Humidity 60 to 70 % RH

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Beads](#) category:

Click to view products by [Ferrocore](#) manufacturer:

Other Similar products are found below :

[2943778301](#) [BMB1J0120BN3JIT](#) [82350120560](#) [0261014605](#) [2643066902](#) [3061000011](#) [2673045901](#) [2643083601](#) [2643074901](#) [4361142521](#)
[4078078621](#) [4078044821](#) [4078033621](#) [CZB2BFTTE121P](#) [BMB2A0120AN2](#) [BMB1J0200BN3JIT](#) [EMI0805R-220](#) [74279250](#) [7427924](#)
[CZB1JGTTD202P](#) [MAF0603GWY551AT000](#) [MAF1005GWZ102AT000](#) [BLM18HE152SH1D](#) [2944778302](#) [BLM02PX600SN1D](#) [SMB2.5-1](#)
[EMI1206R-600](#) [BLM02KX180SN1D](#) [BLM02BC100SN1D](#) [BLM02KX100SN1D](#) [BLM02BB101SN1D](#) [BLM02BC220SN1D](#)
[BLE32PN260SH1L](#) [BLE32PN260SN1L](#) [BLE32PN260SZ1L](#) [74275013](#) [7427503](#) [BLM18HE601SH1D](#) [BLM15BD152SN1D](#)
[BLM15BD152SZ1D](#) [BLE18PS080SZ1D](#) [BLM21PG221BH1D](#) [WLBD1005HCU330TL](#) [BLM21AG471BH1D](#) [BLE18PS080BH1D](#)
[BLM21AG331BH1D](#) [BLM21PG300BH1D](#) [BLM21PG600BH1D](#) [BLM03HB401SZ1D](#) [BLM03HB401SN1D](#)