


## A13-75A36A-A3Z QUATERNITY OUTLET SOCKET WITH PLUG

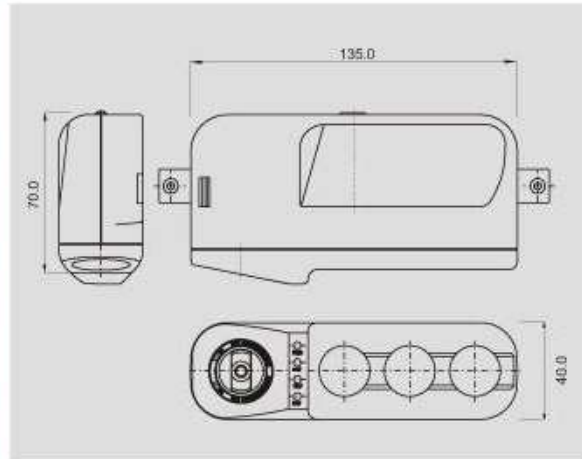

### FEATURES

\* RATING : 10A 12V DC

\* MATERIAL OF SOCKET

Housing : ABS ( UL flame: 94-HB 105°C ).

Inner contact : nickel plated brass.

Contact : nickel plated metal.

\* MATERIAL OF PLUG

Housing : ABS ( UL flame: 94-HB 105°C ).

Top contact : nickel plated brass.

Spring contact : nickel plated spring steel.

\* Triple lighter sockets plus one cigarette lighter sockets with 100cm wire.

\* Green light ring, easy to insert in the dark.

\* Wire SPT-1 18 AWG 105°C.

\* Socket with LED battery checker.

\* With 10A glass tube fuse max.

| BATTERY CHECKER SITUATION |     |     |      | TURN OFF ENGINE OFF FOR FEW MINUTES FOR BATTERY CAPACITY CHECK | START ENGINE FOR FEW MINUTES FOR CHARGING SYSTEM CHECK |
|---------------------------|-----|-----|------|--|--|
| LOW                       | 12V | MID | HIGH |  |  |
| ●                         | ●   | ●   | ●    | Very good  | Very good  |
| ●                         | ●   | ●   | ○    | Normal   | Normal   |
| ●                         | ●   | ○   | ○    | Weak   | Charging system is possibly abnormal                   |
| ●                         | ○   | ○   | ○    | Too much discharge<br>(The battery needs to be charged)        | Charging system is possibly abnormal                   |
| ○                         | ○   | ○   | ○    | No capacity<br>(Voltage is under 3V, replace battery.)         | Check your charging system                             |

NOTE: THE ABOVE READINGS WOULD BE AFFECTED BY THE TEMPERATURE AND CAR USED CONDITION.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Circular Connector](#) category:*

*Click to view products by [SCI manufacturer](#):*

Other Similar products are found below :

[C015](#) [10F006](#) [001](#) [1](#) [5M2530B10P](#) [600247N007](#) [600259N006](#) [600273N007](#) [600432N009](#) [6280-2PG-519](#) [6280-3PG-311](#) [6280-3SG-311](#)  
[6280-7SG-3DC](#) [6280-7SG-522](#) [6282-5PG-311](#) [6282-6PG-519](#) [6282-8SG-311](#) [6283-11](#) [6283-15](#) [6290](#) [6293](#) [6382-2PG-311](#) [6382-2PG-3DC](#)  
[6382-2SG-321](#) [6382-2SG-3DC](#) [6382-4SG-516](#) [67-03E20-37P](#) [681-PMG](#) [CXC3106A1811S](#) [CXS3102A14S2P](#) [CXS3102A181S](#)  
[CXS3106A14S6S](#) [D38999/20FC8SA L/C](#) [MB12P-1](#) [MB12R-6](#) [7251-2PG-300](#) [7251-2SG-300](#) [7251-4PG-300](#) [7251-4SG-300](#) [7251-5PG-300](#)  
[7251-5SG-300](#) [7251-6SG-300](#) [7251-7PG-300](#) [7251-8PG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [73000005663](#) [75-190011-03P](#) [75-190216-08S](#) [75-190218-10P](#) [75-214636-52P](#) [75-474118-10P](#) [75-474211-03P](#)