


400A True RMS Clamp Meters + Dual Type K Thermocouple Inputs

Clamp meters with built-in dual thermocouple inputs
For T1, T2, and T1-T2 differential temperature measurement

Features:

- DC μ A current measurement
- MultiMeter functions include AC/DC Voltage, Resistance, Capacitance, Frequency, Diode, and Continuity
- 1.2" (30mm) jaw opening for conductors up to 500MCM
- 4000 count backlit dual display
- Features include Data Hold and Max Hold
- Autoranging with manual range button
- Auto Power off with Auto Power off disable
- Complete with test leads, 9V battery, two Type K bead wire probes (-4 to 482°F/-20 to 250°C), and case

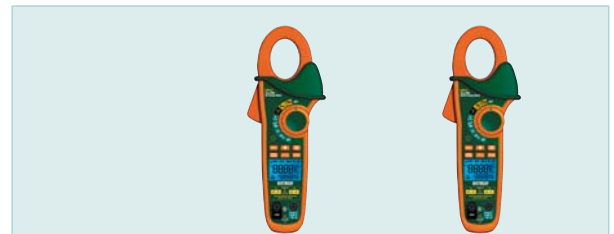

Specifications	EX612	EX613
True RMS	•	•
Display counts	4000	4000
AC Current	0.01A to 400.0A	0.01A to 400.0A
DC Current	—	0.01A to 400.0A
Basic Accuracy (ACA)	1.5%	1.5%
DC Voltage	0.1mV to 600V	0.1mV to 600V
AC Voltage	0.1mV to 600V	0.1mV to 600V
DC μ A Current (DMM)	1 μ A to 400mA	1 μ A to 400mA
Resistance	0.1 Ω to 40.00M Ω	0.1 Ω to 40.00M Ω
Frequency	0.001Hz to 50.00kHz	0.001Hz to 50.00kHz
Capacitance	1nF to 10,000.0 μ F	1nF to 10,000.0 μ F
Temperature (Type K)	-58 to 1832°F (-50 to 1000°C)	-58 to 1832°F (-50 to 1000°C)
Duty Cycle	0.1 to 99.9%	0.1 to 99.90%
Diode	•	•
Continuity	•	•
Dimensions	9x3.1x1.9" (229x80x49mm)	9x3.1x1.9" (229x80x49mm)
Weight	10.7oz (303g)	10.7oz (303g)

Ordering Information:

- EX612 True RMS 400A AC Clamp Meter + Dual Thermocouple Inputs
EX613 True RMS 400A AC/DC Clamp Meter + Dual Thermocouple Inputs



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Clamp Multimeters & Accessories](#) category:

Click to view products by [Extech](#) manufacturer:

Other Similar products are found below :

[FLUKE 1630-2](#) [ZAPDUMOD-03](#) [ZARKMS-01-99](#) [UT233](#) [TESTO 770-3](#) [0590 7703](#) [AX-3550](#) [AX-M266C](#) [BM079](#) [BM089](#) [BM157](#)
[BM162](#) [BM197](#) [KEW2210R](#) [FLUKE 80I-110S](#) [FLUKE A3002FC](#) [FLUKE I200](#) [FLUKE I200S](#) [FLUKE I3000FLEX-24](#) [FLUKE I310S](#)
[CIE600](#) [TESTO 770-2](#) [0590 7702](#) [34194A](#) [KEW2433R](#) [KEW8112](#) [FLUKE 772](#) [380976-K](#) [MA3110](#) [MA440](#) [MA443](#) [MA445](#) [FLUKE-374](#)
[FC](#) [TA74](#) [AMP-320](#) [CM55](#) [CM46](#) [I200](#) [ACD-6 PRO](#) [FLUKE-1630-2FC](#) [CM44](#) [CM42](#) [FLK-A3000 FC](#) [FLUKE-376 FC](#) [MA610](#) [EA30-](#)
[NIST](#) [F201](#) [F205](#) [MA193 \(250 MM\)](#) [DIGIFLEX 4000A 350MM](#) [DIGIFLEX 400A 170MM](#) [DIGIFLEX 400A 250MM](#)