


Absolute maximum ratings

Symbol	Ratings	(Ta=25°C)	Unit
V _{CBO}	120		V
V _{CEO}	100		V
V _{EBO}	6		V
I _c	4		A
I _{CP}	8 (PW≤10ms, Du≤50%)		A
P _T	4 (Ta=25°C) 20 (Tc=25°C)	W	
T _j	150	°C	
T _{stg}	-40 to +150	°C	

Electrical characteristics


Symbol	Specification			Unit	Conditions
	min	typ	max		
I _{CBO}			100	μA	V _{CB} =120V
I _{EBO}			10	mA	V _{EB} =6V
V _{CEO}	100			V	I _c =10mA
h _{FE}	1000				V _{CE} =4V, I _c =2A
V _{CE(sat)}			2.0	V	I _c =2A, I _b =10mA
t _{on}		0.6		μs	V _{cc} =40V, I _c =2A, I _{b1} =-I _{b2} =10mA
t _{stg}		5.0		μs	
t _f		2.0		μs	

■ Equivalent circuit diagram

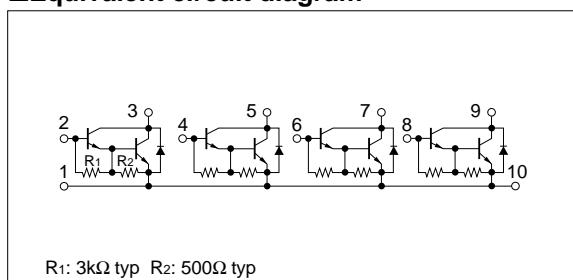


Characteristic curves


I_c-V_{CE} Characteristics (Typical)




h_{FE}-I_c Characteristics (Typical)




h_{FE}-I_c Temperature Characteristics (Typical)




V_{CE(sat)}-I_c Temperature Characteristics (Typical)




V_{CE(sat)}-I_b Characteristics (Typical)




I_c-V_{BE} Temperature Characteristics (Typical)




θ_{ja}-PW Characteristics



P_T-Ta Characteristics



Safe Operating Area (SOA)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Darlington Transistors category:

Click to view products by Sanken manufacturer:

Other Similar products are found below :

[281287X](#) [SMMBT6427LT1G](#) [2N7371](#) [BDV64B](#) [JANTXV2N6287](#) [028710A](#) [SMMBTA64LT1G](#) [2N6350](#) [2SB1214-TL-E](#)
[SMMBTA14LT1G](#) [SBSP52T1G](#) [NJVMJD117T4G](#) [Jantx2N6058](#) [2N6353](#) [LB1205-L-E](#) [500-00005](#) [2N6053](#) [NJVMJD112G](#) [Jan2N6350](#)
[Jantx2N6352](#) [Jantx2N6350](#) [BULN2803LVS](#) [ULN2001N](#) [2SB1383](#) [2SB1560](#) [2SB852KT146B](#) [TIP112TU](#) [TIP122TU](#) [BCV27](#) [MMBTA13-TP](#)
[MMBTA14-TP](#) [MMSTA28T146](#) [BSP50H6327XTSA1](#) [KSH122TF](#) [NTE2557](#) [NJVNJD35N04T4G](#) [TIP115](#) [MPA29-D26Z](#) [MJD127T4](#)
[FJB102TM](#) [BCV26E6327HTSA1](#) [BCV46E6327HTSA1](#) [BCV47E6327HTSA1](#) [BSP61H6327XTSA1](#) [BU941ZPFI](#) [2SB1316TL](#) [2SD1980TL](#)
[NTE2350](#) [NTE245](#) [NTE246](#)