
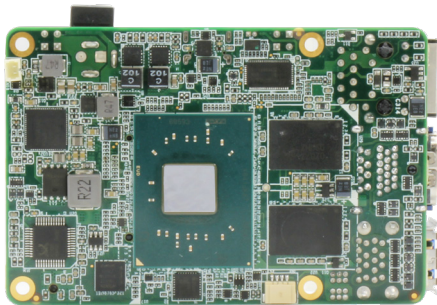
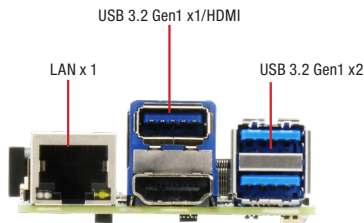


UP 4000 PRELIMINARY

UP Developer Board with Intel® Pentium® N4200/ Celeron® N3350/ Atom E3950™ Processor SoC

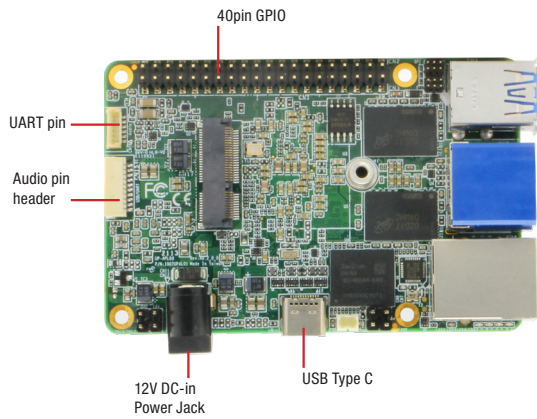

Features


- Intel® Pentium® N4200/ Celeron® N3350/ Atom E3950™ Processor SoC
- Onboard LPDDR4 Memory up to 8GB
- Onboard eMMC Storage up to 64GB
- Gigabit LAN x 1, HDMI x 1, USB 3.2 Gen 1 (Type A) x 3
- 12V DC-in, 5A
- 40 pin GPIO x 1
- 6 pin wafer for Audio x 1



Specifications


System	
Processor	Intel® Pentium® N4200/ Celeron® N3350/ Atom E3950™ Processor SoC
Graphics	Intel® Gen 9 HD, supporting 4K Codec Decode and Encode for HEVC4, H.264,VP8
I/O	HDMI x 1
Camera	—
USB	USB 3.2 Gen 1 (Type A) x 3 USB 2.0 pin header (10 pins in total) x 2 1x USB3.0 OTG via USB type C
Expansion	40 pin GPIO x1 via carrier board: M.2 2230/2242/2280 x1 M.2 3052 x1
RTC	Yes
Power	12V DC-in @5A
Dimension	3.37" x 2.22" (85.6mm x 56.5mm)
Memory	onboard LPDDR4 max to 8GB
Storage	eMMC 32GB/ 64GB
Display Interface	HDMI 1.4bx 1 DP 1.2 via USB TYPE C Connector
Ethernet	Gb Ethernet (full speed) RJ-45 x 1
OS Support	Microsoft Windows 10 (full), Windows IOT Core Yocto project 3.1 Kernel 5.4 Ubuntu 20.04 Kernel 5.4
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Operation Humidity	10% ~ 80% relative humidity, non-condensing
Certification	CE/FCC Class A, RoHS Compliant

Block Diagram

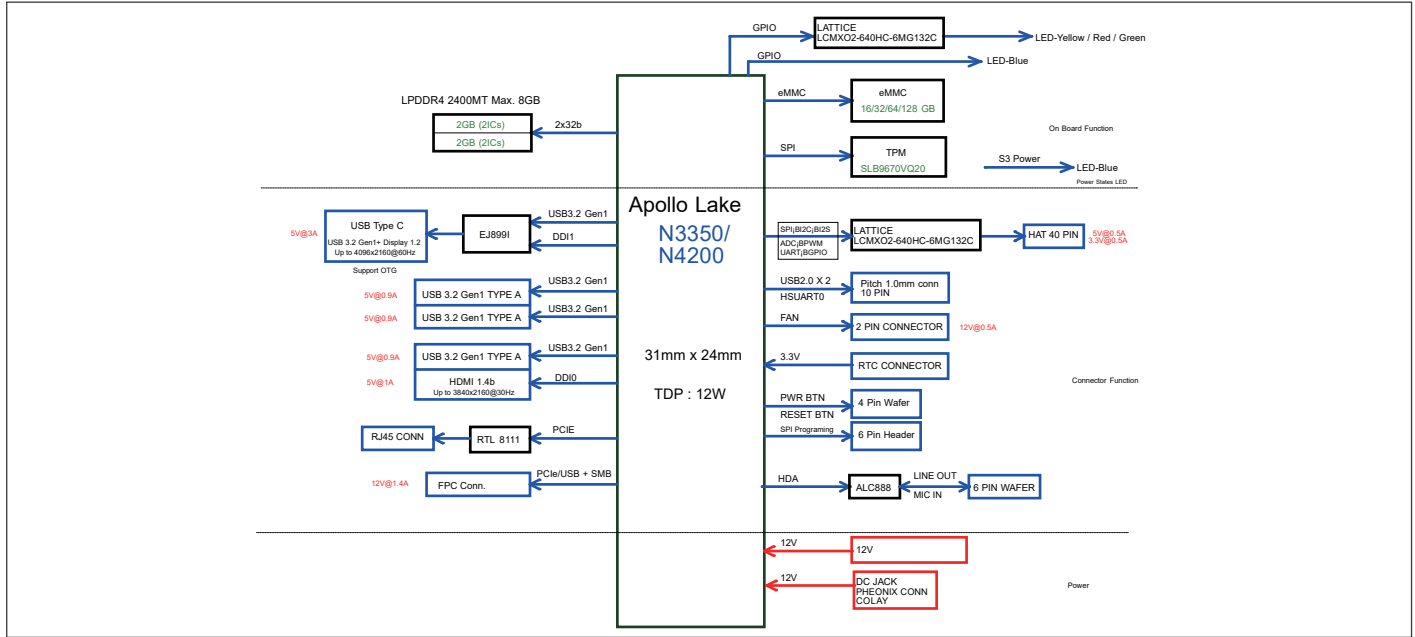

Dimension

Unit: mm

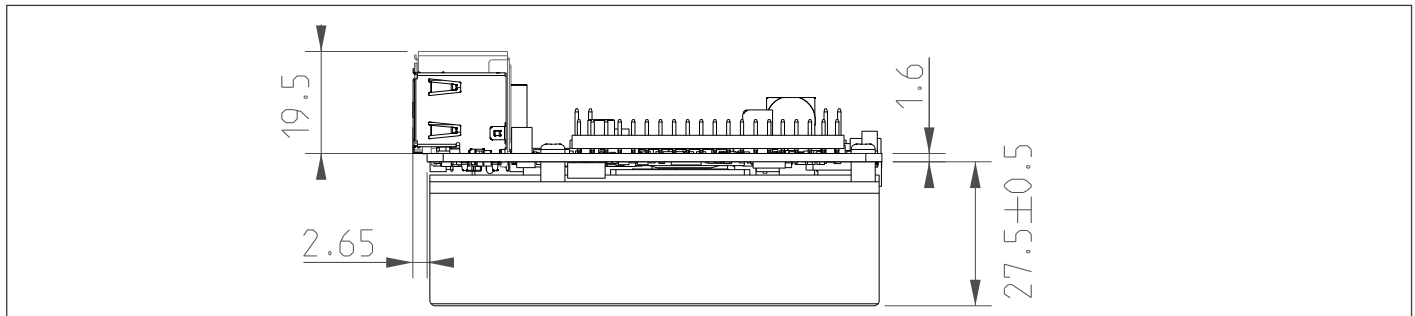

Ordering Information

PN	CPU	Memory	Storage	TPM 2.0	Gbe LAN	Audio wafer
UP-APL03C2F-A10-0232	Apollo Lake N3350(F1)	2GB	32GB	yes	Realtek RTL8111H	yes
UP-APL03C2F-A10-0432	Apollo Lake N3350(F1)	4GB	32GB	yes	Realtek RTL8111H	yes
UP-APL03P4F-A10-0432	Apollo Lake N4200(F1)	4GB	32GB	yes	Realtek RTL8111H	yes
UP-APL03P4F-A10-0864	Apollo Lake N4200(F1)	8GB	64GB	yes	Realtek RTL8111H	yes
UP-APL03X7F-A10-0464	Apollo Lake E3950(F1)	4GB	64GB	yes	Realtek RTL8111H	yes

Packing List

- UP 4000 with Heatsink

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Aaeon](#) manufacturer:

Other Similar products are found below :

[EMB-IB897-I45P](#) [MVME61006E-2173R](#) [5962-8872609LA](#) [BLKNUC7I3DNHNC1978015](#) [IOT-LS1012A-OXALIS](#) [NITX-300-ET-DVI](#)
[UPN-EHLX4E-A10-0432](#) [USB HUB HAT](#) [BANANA PI BPI-P2 PRO](#) [ROCK 4C+](#) [ROCK 5B - 8GB](#) [BPI-R2 PRO](#) [PCE-5129G2-00A3](#) [PCA-](#)
[6029G2-00A3](#) [PCE-5129G2-00A3U](#) [AIMB-706G2-00A3](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-EVB](#) [MITX-440-DVI-2E](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [AM3359-SOM-EVB-IND](#)
[1996](#) [AIMB-223G2-S0A1E](#) [AIMB-562VG-GRA1E](#) [MIO-5270DZ-2GS0A1E](#) [PCE-5126QVG-00A1E](#) [PCE-5125QG2-00A1E](#) [MIO-5251E-](#)
[S3A1E](#) [MIO-2261Z-2GS6A1E](#) [SIMB-M22-2G2S0A1E](#) [ASMB-823I-00A1E](#) [MIO-5251J-U0A1E](#) [AIMB-502WG2-00A1E](#) [BBB01-SC-505](#)
[IMB-M43](#) [AmITX-BT-I-E3845](#) [UPS-APLC2-A10-0432](#) [PICO300VGA-N3060](#) [PICO300HGA-N3710](#) [W65C265QBX](#) [DFR0444](#) [DFR0419](#)
[UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [DFR0418](#) [BBBLUE](#)