

Features


- Intel® Atom™ x5-Z8350 SoC
- Onboard DDR3L Memory up to 4GB
- Onboard eMMC Storage up to 64GB
- Gigabit LAN x 1, USB 2.0 x 4, USB 3.0 x 1, HDMI x 1
- 5V DC-in
- 40 pin GPIO x 1
- DSI/eDP x 1
- MIPI-CSI x 1



Specifications


System	
Processor	Intel® Atom™ x5-Z8350 Processor SoC
Graphics	Intel® HD 400 Graphics, 12 EU GEN 8, up to 500MHz Support DX*11.1/12, Open GL*42, Open CL* 1.2 OGL ES3.0, H.264, HEVC(decode), VP8
I/O	HDMI x 1 I2S Audio port x 1
Camera	MIPI-CSI (4 MEGA pixel)
USB	USB 2.0 x4 USB 2.0 pin header (10 pins in total) x 2 USB3.0 OTG x 1
Expansion	40 pin General Purpose bus, supported by Altera Max V. ADC 8-bit@188ksos
RTC	Yes
Power	5V DC-in @ 4A 5.5/2.1mm jack
Dimension	3.37" x 2.22" (85.6mm x 56.5mm)
Memory	1GB/ 2GB/ 4GB DDR3L-1600
Storage	eMMC 16GB / 32GB/ 64GB
Display Interface	DSI/eDP
Ethernet	Gb Ethernet (full speed) RJ-45 x 1
OS Support	Win 10 Linux (ublinux, Ubuntu, Yocto)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Operation Humidity	10% ~ 80% relative humidity, non-condensing
Certification	CE/FCC Class A, RoHS Compliant

Block Diagram

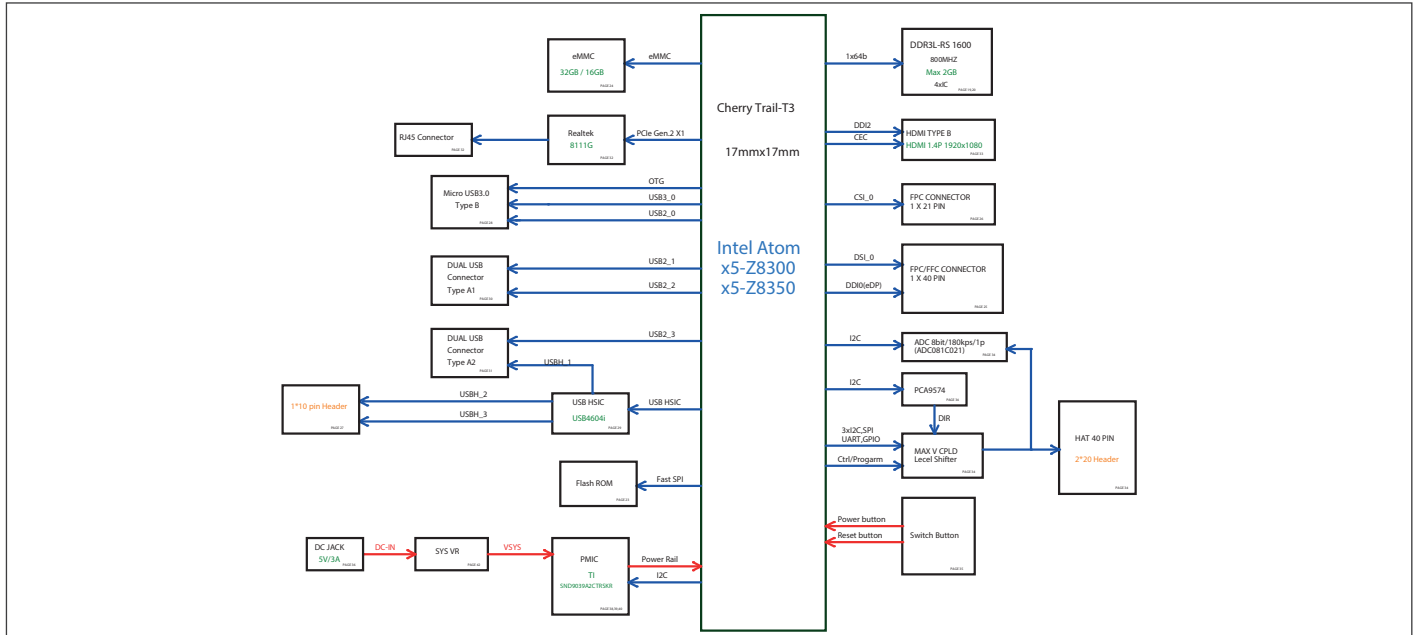

Dimension

Unit: mm

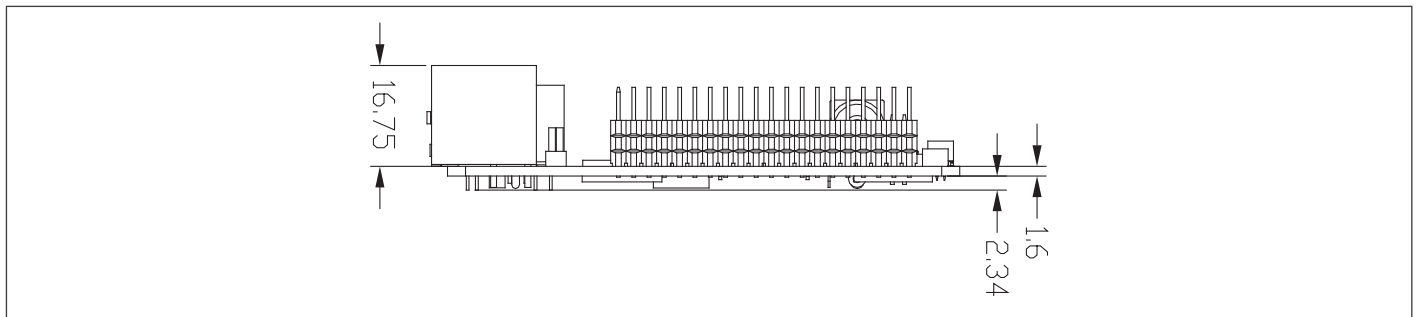

Ordering Information

Part number	Description
UP-CHT01-A20-0116-A11	UP board with z8350 CPU, 1GB RAM+16GB eMMC, passive heatsink
UP-CHT01-A20-0216-A11	UP board with z8350 CPU, 2GB RAM+16GB eMMC, passive heatsink
UP-CHT01-A20-0232-A11	UP board with z8350 CPU, 2GB RAM+32GB eMMC, passive heatsink
UP-CHT01-A20-0432-A11	UP board with z8350 CPU, 4GB RAM+32GB eMMC, passive heatsink
UP-CHT01-A20-0464-A11	UP board with z8350 CPU, 4GB RAM+64GB eMMC, passive heatsink

Packing List

- UP-CHT01 with Heatsink

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Aaeon](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-](#)
[EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-](#)
[4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#)
[MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-](#)
[S16M-IND](#)