
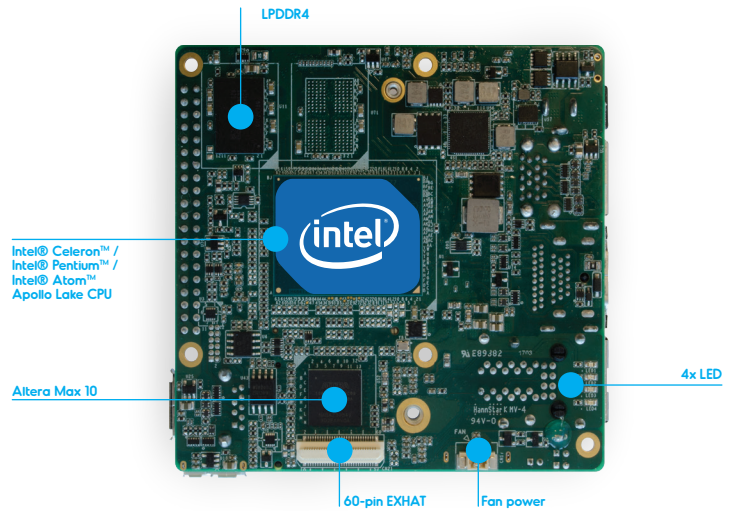


UP²

bridge
the gap

specification

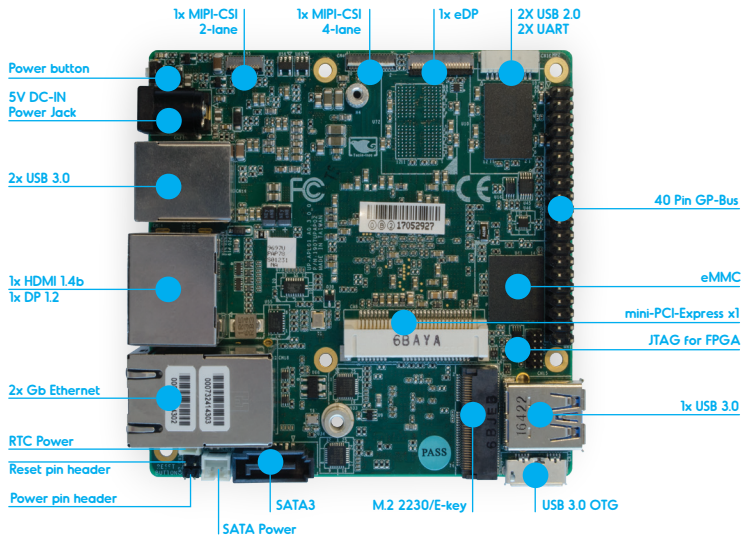

UP² (UP Squared) is world's fastest maker board with the high performance and low power consumption features of **Intel® Celeron™, Pentium™ and Atom™ Processors (codename Apollo Lake)**.

The internal GPU is the new **Intel Gen 9 HD with 12 / 18 Execution Units**, supporting **4K Codec Decode and Encode** for HEVC⁴, H.264 and VP8. Thanks to the Vector Units Image Processing Unit and Precision Timing Management to synchronize CPU with I/O, improved determinism (cache QoS, Intel Virtualization Technology), all the graphic processing is effortless to UP² (UP Squared).

UP² (UP Squared) comes with **2GB/4GB/8GB LPDDR4** and **32GB/64GB/128GB eMMC**. A **40-pin GP-bus** provides the freedom for makers to build up their module. Additionally, there is a **60-pin EXHAT** for embedded applications. This allows for the exploration of more possibilities. The expansion capabilities of UP² (UP Squared) goes much further than this. Native **mini-PCI-e, M.2 2230 and SATA3** are all built in on the board. What more could one desire?

The board supports **Windows 10, Windows IoT Core, Ubilinux, Ubuntu, Yocto and Android Marshmallow**. It's really UP to you to decide which operating system is best for your application. Now, all you need is an UP² (UP Squared) to begin your project!

UP - Applications



Drones




Education



Robotics



Media Center

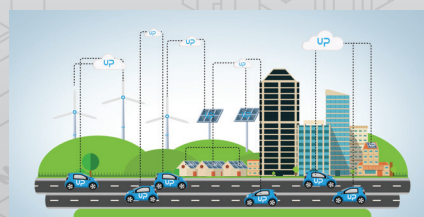
























Internet of Things



Home Automation

UP² - Specifications

        	<p>SOC Intel® Celeron™ N3350 (up to 2.4 GHz) Intel® Pentium™ N4200 (up to 2.5 GHz) Intel® Atom™ X5-E3940 / X7-E3950</p> <p>Graphics Intel® Gen 9 HD, supporting 4K Codec Decode and Encode for HEVC4, H.264, VP8</p> <p>Video & Audio HDMI 1.4b x1 4K @ 30 hz + DP 1.2 4K @ 60 hz I2S audio port</p> <p>Camera interface MIPI-CSI2 2-lane (2MP) + MIPI-CSI2 4-lane (8MP)</p> <p>Display interface eDP</p> <p>Power 5V DC-in @ 4A-6A</p> <p>Operating humidity 0% ~ 90% relative humidity, non-condensing</p> <p>Operating Temperature 32-140°F / 0~60°C</p> <p>Altera MAX 10 FPGA 2KLE --Celeron/ Pentium 4KLE -- ATOM</p>	            	<p>Memory 2GB/4GB/8GB LPDDR4</p> <p>Storage Capacity 32 GB / 64 GB / 128 GB eMMC</p> <p>USB 3x UB3.0 (Type A) + 1x USB 3.0 OTG (Micro B) 2x USB2.0+2 X UART (Tx/Rx) debug port (pin header)</p> <p>Ethernet 2x Gb Ethernet (full speed, Realtek 8111G) RJ-45</p> <p>RTC Yes</p> <p>Expansion 40 pin General Purpose bus + 4-channel 12-bit A/D converter (500 kcps to 1 Msps) 60 pin EXHAT 1xmini-PCIe (full-size, auto switch to m-SATA) M.2 2230, SATA3</p> <p>Compatible Operating system Microsoft Windows 10 (full), Windows IOT Core, Linux (ublinux, Ubuntu, Yocto), Android Marshmallow</p> <p>Dimensions 3.37" x 3.54" / 85.60 mm x 90 mm</p> <p>Certificate CE/FCC Class A, RoHS compliant, REACH</p>
---	--	---	---

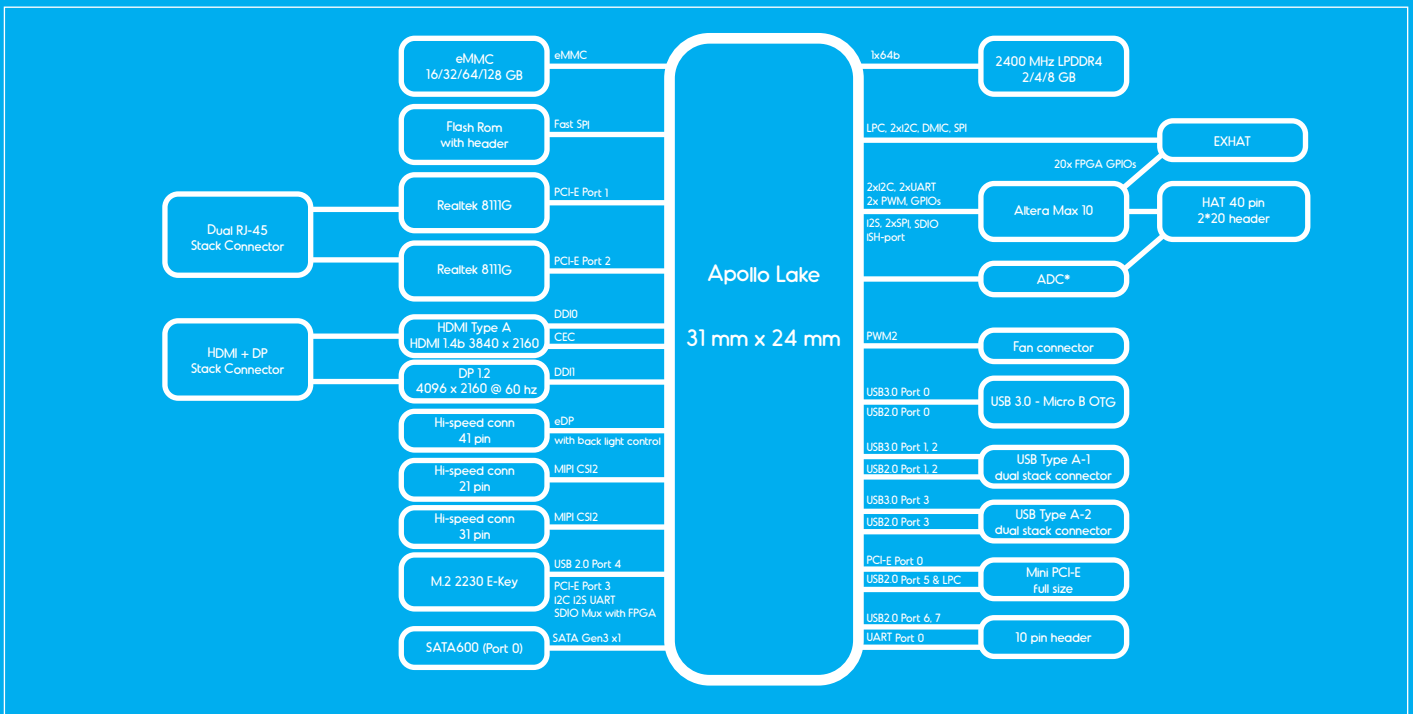

UP² - Pinout

2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40
1	3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35	37	39
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40

* 2nd SPI and ADC will be available only with E3940 SoC

UPS-APLC2-A20-0232 RE-UPS-APLC2-A10-0432 UPS-APLX5-A20-0432 RE-UPS-APLX7-A10-0464 RE-UPS-APLX7-A10-0464-VINO01	Celeron N3350 2GB memory/32GB eMMC Celeron N3350 4GB memory/32GB eMMC Atom x5-E3940 4GB memory/32GB eMMC Atom x7-E3950 4GB memory/64GB eMMC Atom x7-E3950 4GB memory/64GB eMMC with Ubuntu Image	RE-UPS-APLP4-A10-0432 UPS-APLP4-A10-0864 UPS-APLP4-A20-08128 RE-UPS-APLP4-A10-0864-VN01	Pentium N4200 4GB memory/32GB eMMC Pentium N4200 8GB memory/64GB eMMC Pentium N4200 8GB memory/128GB eMMC Pentium N4200 8GB memory/64GB eMMC with Ubuntu Image
--	--	--	---

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Aaeon](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [BPI-M5](#)
[GENE-APL5-A12-F002](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#)
[VAB-600-B](#) [RT5350F-OLINUXINO-EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#)
[BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-](#)
[APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#)
[PROFESSIONAL](#) [GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-](#)
[LIME-S16M](#) [A20-OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#)