


● ELECTRICAL PARAMETERS

| 谐振器产品技术指标 | | Min | Max | Units |
|---|-----|--------------|-----|----------|
| 1.Holder Type(型号规格) | | SEAM 3.2*2.5 | | |
| 2.Mode of Oscillation (振动模式) | | Fundamental | | |
| 3. Frequency (标称频率) | | 12.000000 | | MHz |
| 4.Load Capacitance (CL) (负载电容) | | 18 | | pF |
| 5.Drive Level (激励功率) | | 100 | | uw |
| 6.Equivalent Resistance (谐振电阻) | | | 80 | Ω |
| 7.Shunt Capacitance (Co) (静态电容) | | 0 | 5 | pF |
| 8.Motional Capacitance (C1) (动态电容) | | N/A | | fF |
| 9.Frequency Tolerance at 25℃ (调整频差) | | -20 | 20 | ppm |
| 10.Stability over operation temperance (温度频差) | | ± 20 | | ppm |
| 11.Insulation Resistance (at DC 100V) (绝缘电阻) | | 500 | | MΩ |
| 12.Operating Temperature Range (工作温度范围) | | -40 | 85 | ℃ |
| 13. Storage Temperature Range (储存温度范围) | | -55 | 125 | ℃ |
| 14. Aging (老化率) | | ± 5 | | ppm/year |
| 15. DLD2 | N/A | | N/A | Ω |
| 16. FLD2 | | | N/A | ppm |
| 17. RLD2 | | | N/A | Ω |
| 18. SPDB | | | N/A | db |
| 19. Other(其它) | | N/A | | |

OUTLINE DIMENSIONS(UNIT:mm) 外形尺寸 (单位: mm)

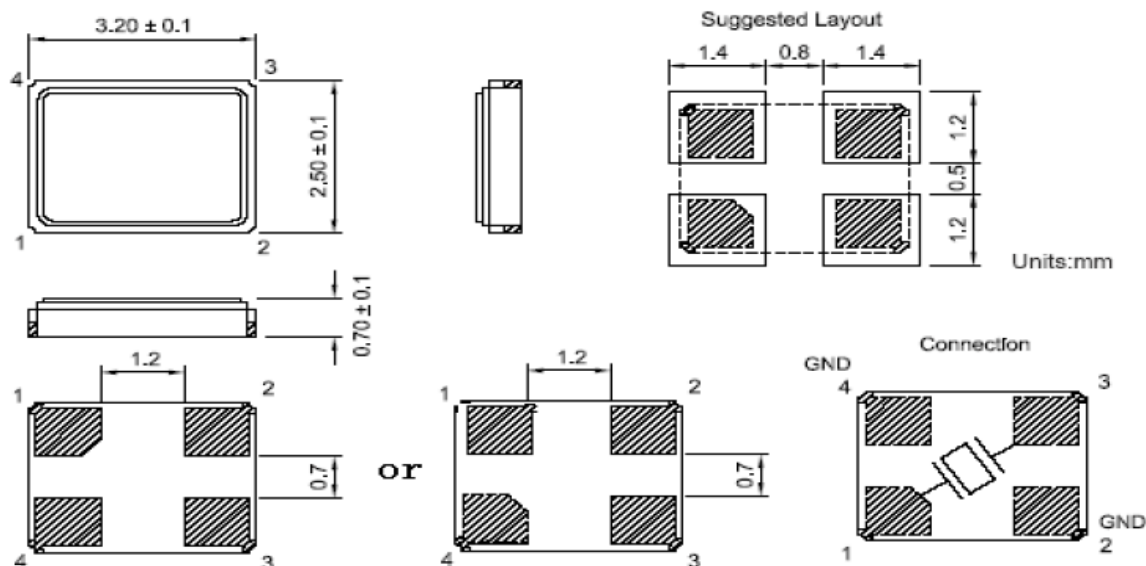

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals category](#):

Click to view products by [Abel manufacturer](#):

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFX TAL066198Cutt](#)
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)
[LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)