## **RFID Patch Antenna**

## APAES915R6460C16-T

RoHS/RoHS II compliant



**MSL level: Not Applicable** 

### **FEATURES:**

- High Gain
- Pin type
- Customization Available
- RoHS Compliance

### > TYPICAL APPLICATIONS:


RFID systems for Logistic & Inventory Management of Retail, Pharmaceutical, Automotive Industries; Industrial automation, Contactless smart cards.

### **STANDARD SPECIFICATIONS:**

Parameters	Min.	Тур.	N	Max.	Units	Note
Receiving Frequency Range	902.0		9	28.0	MHz	
Center Frequency (*)		915			MHz	(On a 65*65mm Ground Plane)
Bandwidth	15				MHz	(Return loss ≤-10dB)
Gain		3.5			dBic	(Peak gain on 70*70mm Ground Plane facing Zenith.)
Axial Ratio				3	dB	
VSWR @ Center Frequency	1.5					
Polarization Model		RHCP				(Right Hand Circular Polarization)
Impedance		50			Ω	
Frequency Temperature Coefficient	-10		·	10	ppm/°C	

<sup>(\*)</sup> Application environment, including size of the ground plane, proximity to adjacent components, etc., will affect stated performance. Fine tuning might be required when installed on end-customer's PCB. Abracon offers Antenna Optimization Service, please contact Abracon.

### > TEST CONDITIONS & TEST SETUP:

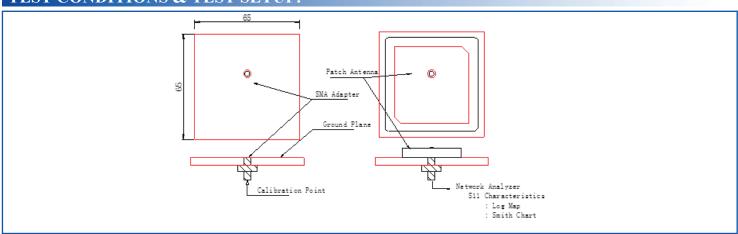

### > STRUCTURE AND MATERIAL

Description	Material
Antenna Substrate	Dielectric Ceramics
Pin	Copper and tinplated
Electrode	Ag Plated
Ground Plane	Ag Plated
Adhesive Type	NITTO 5000NS





# **RFID Patch Antenna**


# APAES915R6460C16-T


**RoHS/RoHS II compliant** 




# > SMITH CHART

### **►** RADIATION PATTERN

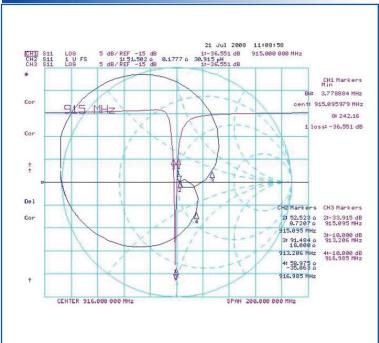

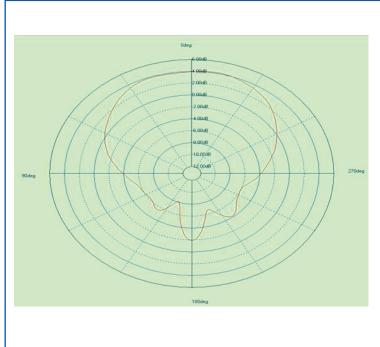

## **OUTLINE DIMENSION:**

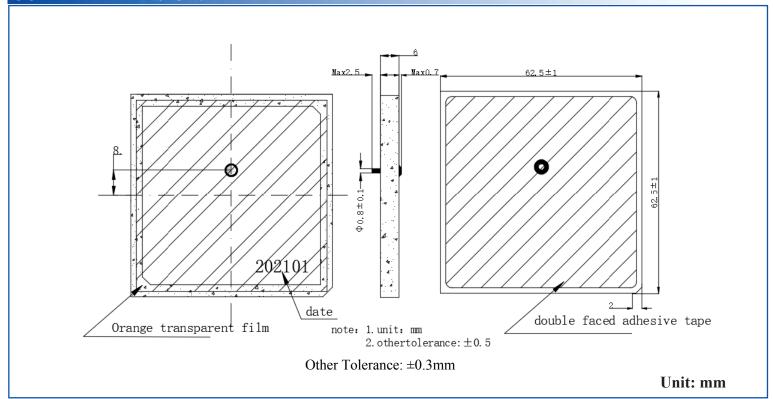





## **RFID Patch Antenna**

## APAES915R6460C16-T

RoHS/RoHS II compliant



### > PACKAGING:

Package Type	Quantity	
Tray	8 pcs/tray	
Inner Box	80pcs/box	
Outer Box	160 pcs/box	
120	335 Inner Box 328 ± 5	DIELECTRIC ANTENNA  TYPE QTY: PCS SZZE: 345 × 210 × 260 G.WT kG N.WT kG  345 ± 4.0  Outside Box
		•
4xR8		±5

#### **CAUTION:**

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

### **NOTE:**

- 1) The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2) ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement. 3) In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specifica-
- 4) When changing your production process, please notify ABRACON immediately.
- 5) ABRACON Corporation's products are COTS Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON Corporation is required. Please contact ABRACON Corporation for more information.
- 6) All specifications and Marking will be subject to change without notice.

ATTENTION: Abracon LLC's products are COTS - Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.





5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159

| Fax: 512-351-8858

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF EXB144SM C37 MAF94051 GD35-17P-NF P1744 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393