


NOTES:


1. MATERIALS AND FINISHES:
 SMPM STR PLUG - BeCu, GOLD PLATING
 SMPM R/A PLUG - BeCu, GOLD PLATING
 CABLE - 0.085 SEMI-RIGID CONFORMABLE
2. ELECTRICAL:
 IMPEDANCE: 50 OHM
3. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED
 "AMPHENOL RF, 95-725-114-XXX AND DATE CODE"

THIRD ANGLE PROJ.

REVISIONS				
REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	15-Aug-19	12601	EH

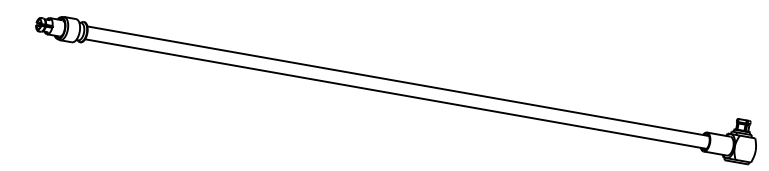

SCALE 0.800

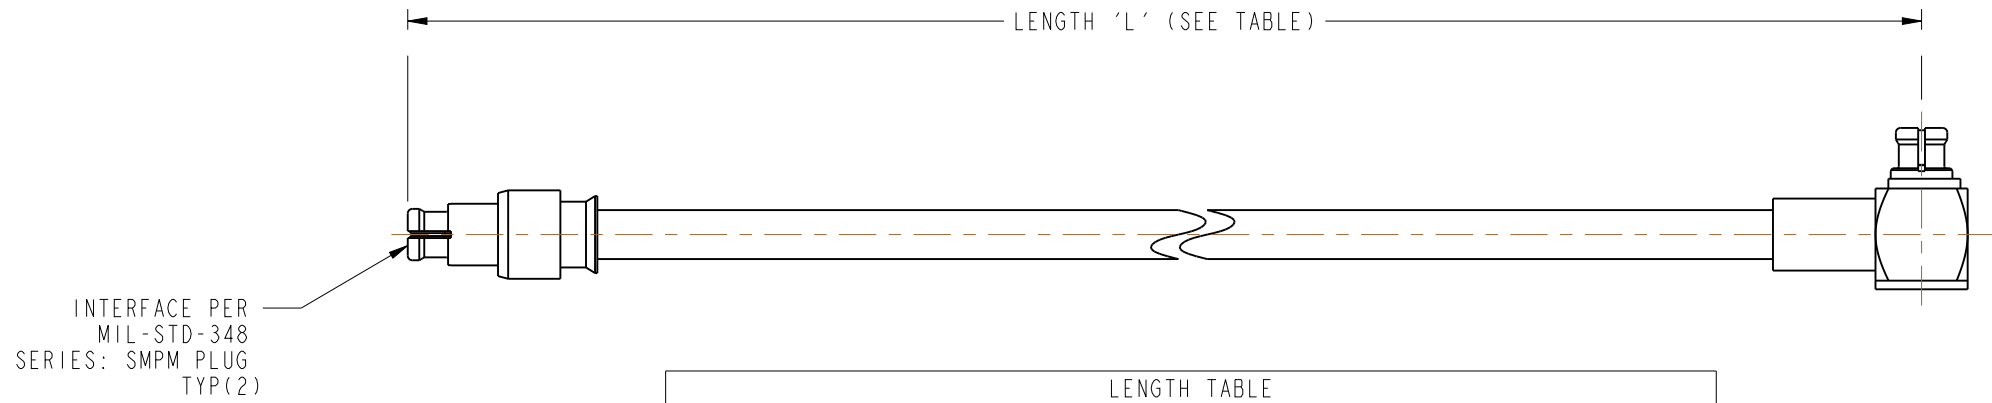

LENGTH TABLE			
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH AND TOLERANCE 'L' IN INCHES [METERS]	LENGTH IN FEET
95-725-114-030	-	3.00 ± 0.25 [0.076 ± 0.006]	0.250
-	95-725-114M010	3.94 ± 0.25 [0.100 ± 0.006]	0.328
95-725-114-040	-	4.00 ± 0.25 [0.102 ± 0.006]	0.333
95-725-114-050	-	5.00 ± 0.25 [0.127 ± 0.006]	0.417
95-725-114-060	-	6.00 ± 0.25 [0.152 ± 0.006]	0.500
95-725-114-070	-	7.00 ± 0.25 [0.178 ± 0.006]	0.583
95-725-114-080	-	8.00 ± 0.25 [0.203 ± 0.006]	0.687
95-725-114-090	-	9.00 ± 0.25 [0.229 ± 0.006]	0.771
-	95-725-114M025	9.84 ± 0.25 [0.250 ± 0.006]	0.820
95-725-114-100	-	10.00 ± 0.25 [0.254 ± 0.006]	0.854
95-725-114-110	-	11.00 ± 0.25 [0.279 ± 0.006]	0.937
95-725-114-120	-	12.00 ± 0.25 [0.305 ± 0.006]	1.000
95-725-114-180	-	18.00 ± 0.25 [0.457 ± 0.006]	1.500
-	95-725-114M050	19.69 ± 0.25 [0.500 ± 0.006]	1.641
95-725-114-240	-	24.00 ± 0.50 [0.610 ± 0.013]	2.000
-	95-725-114M075	29.53 ± 0.50 [0.750 ± 0.013]	2.461
95-725-114-360	-	36.00 ± 0.50 [0.914 ± 0.013]	3.000
-	95-725-114M100	39.37 ± 0.50 [1.000 ± 0.013]	3.281
95-725-114-480	-	48.00 ± 0.50 [1.219 ± 0.013]	4.000
-	95-725-114M200	78.74 ± 1.97 [2.000 ± 0.050]	6.562

TOLERANCE TABLE	
LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0 - 0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

DESIGN REQUIREMENTS			
<input checked="" type="checkbox"/> FREQUENCY:	DC TO 18 GHz	<input checked="" type="checkbox"/> CONTINUITY	
<input checked="" type="checkbox"/> VSWR:	1.30 MAX @ DC-10 GHz 1.50 MAX @ 10-18 GHz	<input checked="" type="checkbox"/> HI-POT:	500 VRMS
<input type="checkbox"/> INS. LOSS:	---- dB MAX	<input type="checkbox"/> OTHER	

CUSTOMER OUTLINE DRAWING
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ±1°	MATERIAL NOTE 1	DRAWN E. HILL	DATE 23-Jul-18	TITLE SMPM STR PLUG TO SMPM R/A PLUG, USING 0.085 CONFORMABLE CABLE, VARIOUS LENGTH	Amphenol RF www.amphenolrf.com
	REFERENCE EAR# 8504 REF: 95-725-111-XXX	ENGINEER E. HILL	DATE 23-Jul-18	APPROVED K. CAPOZZI	
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	CONFIGURATION LEVEL: In Work	CAD FILE	DWG SIZE B	REV A	DRAWING NO. 95-725-114-XXX ITEM NO. 95-725-114-XXX PART NO. 95-725-114-XXX

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[573/2](#) [73-6311-6](#) [73-6353-3](#) [73-6364-6](#) [MDB1-9SH001](#) [MDM-15PH003L-K139](#) [MDM-21PH003L-K139](#) [MH113-01SB1-MH1RP-0152](#)
[MIKQ6-7SH076](#) [R288940005](#) [RF174-01RP1-03RP1-0110](#) [145111-05-12.00](#) [1661-C-24](#) [2192](#) [CA-628485-A43](#) [24P104C24J1-012](#)
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P203C24P2-006](#) [24P204C24J1-003](#) [9950-1100-23](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-](#)
[ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [R284008001](#) [R285426000](#) [R288940003](#) [R288940008](#)
[RF174-03RP1-01BR1-0200](#) [RF179-74BJ3-77RP1-0305](#) [4814-BB-24](#) [500-181-R-ACC](#) [MIKQ6-7SH023](#) [5260-72](#) [314-120](#) [JR4N1-CL1-6F](#)
[JR4R3-CL1-4F](#) [JT2N1-CL1-1F](#) [JT2T1-CL1-6F](#) [4814-K-48](#) [RN-UFL-SMA6](#) [100E151JW3600X](#) [CCNTN2-MM-LL335-26](#) [73-6310-50](#) [73-](#)
[6351-25](#)