

NOTES:

1. MATERIALS AND FINISHES:

SMA STR PLUG - P/N: 132144
 CABLE - RG-316/U COAXIAL CABLE

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM



3. PACKAGING:

A. QUANTITY: SINGLE PACK
 B. BAG TO BE MARKED: AMPHENOL RF, 135101-01-XX.XX, AND DATE CODE

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECN	APPR
NC	INITIAL RELEASE	03-Feb-09	--	--
C	SYNC, UPDATED DRAWING FORMAT\N/A	12-Aug-16	01541	SH
D	60.00", 72.00" & M2.00 LENGTHS ADDED	13-Dec-18	9961	VR

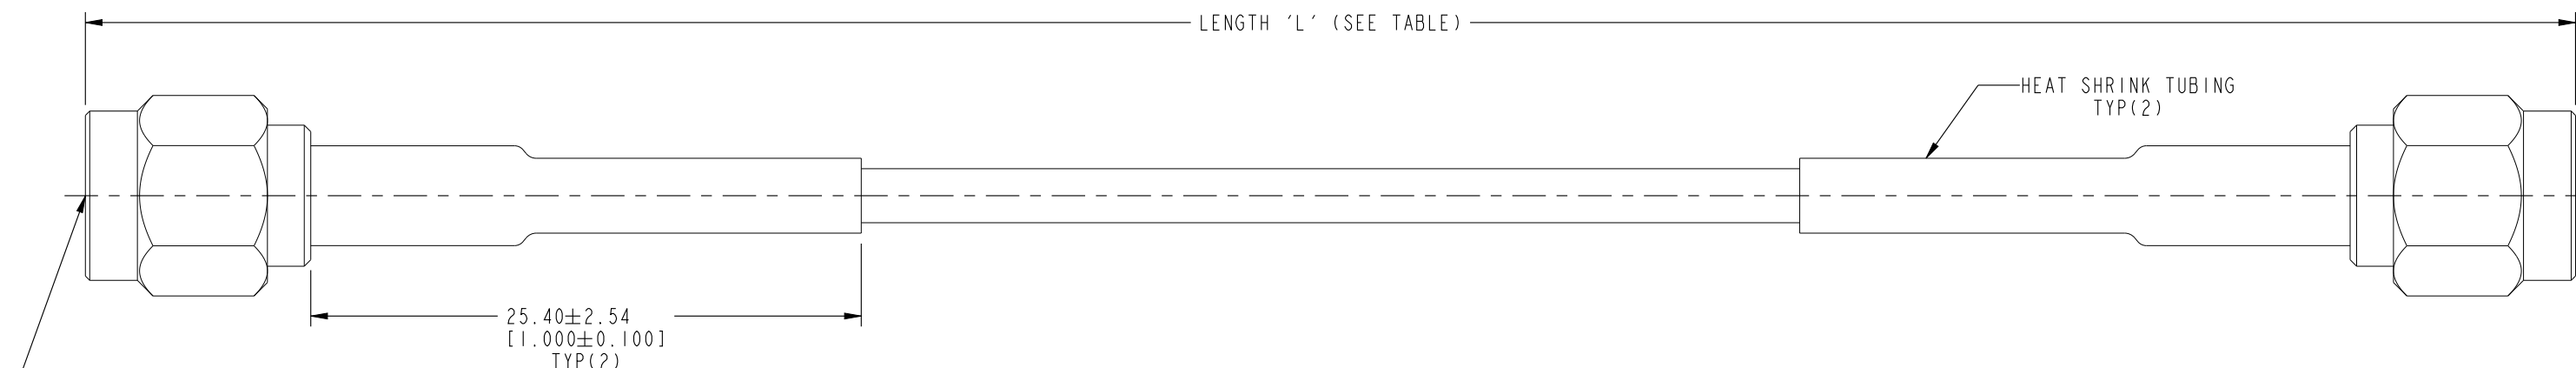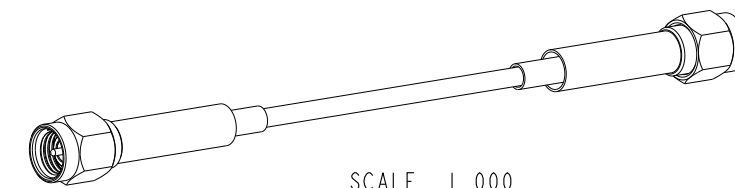

DRAWING NO.	PART NO. (IMPERIAL)	PART NO. (METRIC)	'L' METERS [INCHES]
SMAM-316U-SMAM002-16-02	-	135101-01-M0.10	0.100±0.006 [3.94±0.250]
SMAM-316U-SMAM002-16-03	135101-01-06.00	-	0.152±0.006 [6.00±0.250]
SMAM-316U-SMAM002-16-04	-	135101-01-M0.25	0.250±0.006 [9.84±0.250]
SMAM-316U-SMAM002-16-05	135101-01-12.00	-	0.305±0.006 [12.00±0.250]
SMAM-316U-SMAM002-16-01	135101-01-18.00	-	0.457±0.006 [18.00±0.250]
SMAM-316U-SMAM002-16-06	-	135101-01-M0.50	0.500±0.006 [19.69±0.250]
SMAM-316U-SMAM002-16-07	135101-01-24.00	-	0.610±0.013 [24.00±0.500]
SMAM-316U-SMAM002-16-08	-	135101-01-M0.75	0.750±0.013 [29.53±0.500]
SMAM-316U-SMAM002-16-09	135101-01-36.00	-	0.914±0.013 [36.00±0.500]
SMAM-316U-SMAM002-16-10	-	135101-01-M1.00	1.000±0.013 [39.37±0.500]
SMAM-316U-SMAM002-16-11	135101-01-48.00	-	1.219±0.013 [48.00±0.500]
SMAM-316U-SMAM002-16-12	135101-01-60.00	-	1.524±0.038 [60.00±1.500]
SMAM-316U-SMAM002-16-13	135101-01-72.00	-	1.829±0.046 [72.00±1.800]
SMAM-316U-SMAM002-16-14	-	135101-01-M2.00	2.000±0.050 [78.74±1.970]

DESIGN REQUIREMENTS:

- FREQUENCY: DC - 3 GHz CONTINUITY
 VSWR: ----1 MAX. HI-POT: 500 VRMS
 INS. LOSS: ----dBMAX. OTHER

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
 <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	SEE NOTES
REFERENCE	EAR# 7297
REF:	
CONFIGURATION LEVEL:	In Work
FINISH	

DRAWN	M. ZHANG	DATE	09-Jul-16
ENGINEER	KARTHIK R	DATE	08-Jul-16
APPROVED	K. CAPOZZI	DATE	13-Dec-18
CAD FILE			

TITLE	SMA STR PLUG TO SMA STR PLUG USING COAXIAL RG-316/U CABLE VARIOUS LENGTHS
SCALE:	3.3:1.0 SHEET 2 OF 2
DWG SIZE	B
REV	D

Amphenol RF	
www.amphenolrf.com	
DRAWING NO.	SMAM-316U-SMAM002-16-XX
ITEM NO.	11M3611M00216XX
PART NO.	135101-01-XX.XX

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [R288940005](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#)