

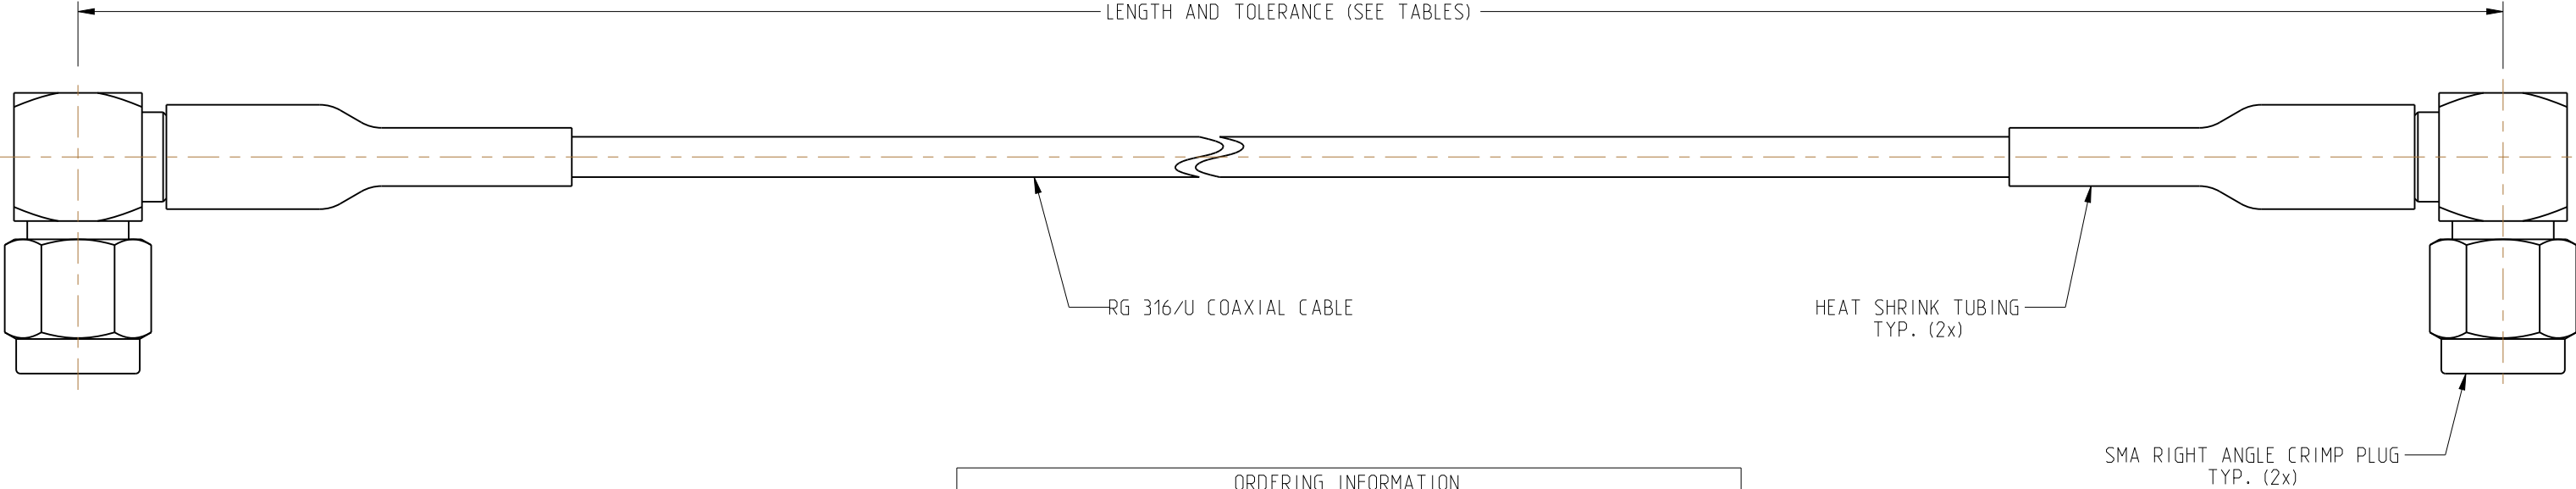


NOTES: 1. MATERIALS AND FINISHES: SMA RIGHT ANGLE CRIMP PLUG - P/N: 132123 CABLE - RG 316/U COAXIAL CABLE	135104-01-XX.XX	REVISIONS				
	DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
	THIRD ANGLE PROJ. 	NC	INITIAL RELEASE	03-Feb-09	--	--
		B	SEE SHEET 1	25-Mar-14	2711	KR/BCG

2. ELECTRICAL:
- A. IMPEDANCE: 50 OHM, NOMINAL
3. PACKAGING:
- A. QUANTITY: SINGLE PACK
B. BAG TO BE MARKED: AMPHENOL RF, 135104-01-XX.XX, AND DATE CODE

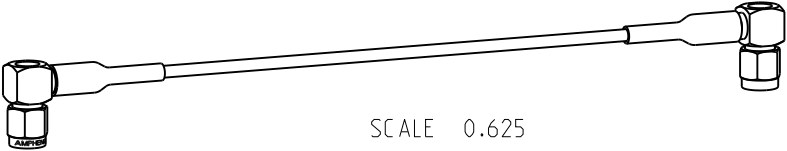

ORDERING INFORMATION		
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH IN INCHES * [METERS]
135104-01-06.00	-	6.00 [0.152]
-	135104-01-M0.25	9.84 [0.250]
135104-01-12.00	-	12.00 [0.305]
135104-01-18.00	-	18.00 [0.457]
-	135104-01-M0.50	19.69 [0.500]
135104-01-24.00	-	24.00 [0.610]
-	135104-01-M0.75	29.53 [0.750]
135104-01-36.00	-	36.00 [0.914]
-	135104-01-M1.00	39.37 [1.000]
135104-01-48.00	-	48.00 [1.219]

TOLERANCE TABLE	
LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0 - 0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

DESIGN REQUIREMENTS:

☒ FREQUENCY : DC TO 3.0 GHz

☐ VSWR : ____1 MAX

☐ INS. LOSS : ---- dBMAX

☒ CONTINUITY

☒ HI-POT : 500 VRMS

☐ OTHER

* ADDITIONAL LENGTHS CAN BE PROVIDED.
CONTACT AMPHENOL RF MARKETING FOR QUOTE

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE AS FOLLOWS: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°		MATERIAL SEE NOTES	DRAWN KARTHIK R	DATE 11-Mar-14	TITLE SMA RIGHT ANGLE CRIMP PLUG TO SMA RIGHT ANGLE CRIMP PLUG JACK USING RG 316 CABLE, VARIOUS LENGTHS	Amphenol Connex		
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.			ENGINEER KARTHIK R	DATE 11-Mar-14				
		REFERENCE	APPROVED B.C. GLEISSNER	DATE 25-Mar-14				
			CAD FILE			DWG SIZE B	DRAWING NO. 135104-01-XX.XX	REV B

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [R288940005](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#)