

217825C PICK-UP TRUCK BED LINER POWER OUTLET

CASCO PRODUCTS

CASCO PICK-UP TRUCK BED LINER POWER OUTLET IS DESIGNED/ COMPLIANCE WITH SAE/US CAR INDUSTRY STANDARDS.

MATERIAL AND FINISH

- HOUSING – NYLON 6/6
- INSULATOR - NYLON 66 PER GM 7400M SPEC.
- TERMINAL – GROUND TIN PLATED BRASS

ELECTRICAL SPECIFICATIONS

- POWER RATING – 15 AMPS
- ISOLATION RESISTANCE - 20 MEG OHM WITH 500 VDC OR 440 VAC (60 CYCLES)

MECHANICAL SPECIFICATIONS

- TORSION SPRING - STAINLESS STEEL
- WELL - ZINC PLATED
- HOUSING – THICKNESS PER DRAWING

ENVIRONMENTAL SPECIFICATIONS


- SALT SPRAY – TEST FOR CORROSION
- WATER / DUST – TEST FOR WATER SPRAY AND DUST SPRAY PER SPECIFICATIONS
- OPERATING TEMP. - -40 TO 85C

LEAD WIRES

- RED COLOR / POSITIVE + / 17 FOOT LEAD WIRE
- BLACK COLOR / NEGATIVE - / 1 FOOT LEAD WIRE

DIRECTIONS / HOW TO INSTALL THE UNIT

Step 1 2 1/4"

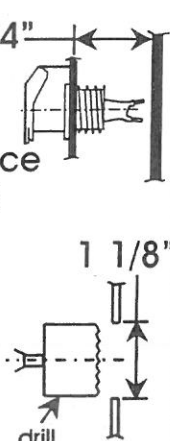

2 1/4" clearance req'd for back side of outlet. Check for outlet clearance. Drill a 1 1/8" hole through bed liner or dash.

drill

Step 2



Run wires through hole in liner or dash. Put lock washer and nut on from back and tighten.

Step 3 Run lead wire (red) to fuse box or battery. If lead wire is connected directly to the battery, utilize a 15 Amp in-line fuse for protection. Attach ground wire (black) to grounded frame.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)
[HU](#) [98891-1012](#) [98947-1016](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#) [12052466](#)
[12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#) [12047957](#)
[12047957-L](#) [12059473](#) [12066261](#) [12110546](#)