

General purpose triaxial accelerometer

993B-7-M12



SPECIFICATIONS

Sensitivity, $\pm 10\%$, 25°C	100 mV/g
Acceleration range	60 g peak
Amplitude nonlinearity	1%
Frequency response¹:	
Z axis, ± 3 dB	2 - 10,000 Hz
X and Y axes, ± 3 dB	2 - 7,000 Hz
Resonance frequency	>35 kHz
Transverse sensitivity, max	7% of axial
Temperature response:	
-50°C	-12%
+120°C	+12%
Power requirement:	
Voltage source	18 - 30 VDC
Current regulating diode	2 - 5 mA
Electrical noise, equiv. g, nominal:	
Broadband 2.5 Hz to 25 kHz	160 μ g
Spectral 10 Hz	10 μ g/ \sqrt Hz
100 Hz	2.0 μ g/ \sqrt Hz
1,000 Hz	1.5 μ g/ \sqrt Hz
Output impedance, max	400 Ω
Bias output voltage	12 VDC
Grounding	case isolated, internally shielded
Turn-on time	<1 sec
Temperature range	-50° to +120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv. g, max	100 μ g/gauss
Sealing	hermetic
Base strain sensitivity, max	0.0005 g/ μ strain
Weight (excluding cable)	124 grams
Case material	316L stainless steel
Mounting	10-32 captive screw
Output connector	4 pin, M12 style
Mating connector	RM12S
Recommended cabling	4 conductor, shielded



Key features

- Three axis simultaneous sensing
- Certified version available for use in hazardous areas (model 993B-7-M12 [CERT])
- Manufactured in ISO 9001 facility

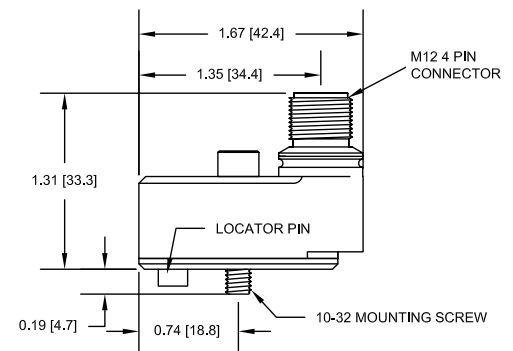

Notes: ¹ As measured using the TCC-993 mounting screw.
Accessories supplied: Captive screw; calibration data

Connections	
Function	Connector pin
X axis, power/signal	1
Y axis, power/signal	2
Z axis, power/signal	3
common (all channels)	4
ground	shell



Note: Due to continuous process improvement, specifications are subject to change without notice.
This document is cleared for public release.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Accelerometers](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[AD22372Z-RL7](#) [ADXL313WACPZ-RL](#) [805M1-0050-01](#) [MXC6655XA](#) [MMA7455LT](#) [805M1-0200-01](#) [810M1-0025X](#) [3038-0050](#) [832M1-0050](#) [805-0050](#) [AD22301](#) [ADXL354BEZ](#) [SCA620-EF8H1A-1](#) [MC3413](#) [MXC6244AU](#) [3038-0500](#) [ACH-01-04/10](#) [4692](#) [735T](#) [787-500](#) [787AM8](#) [793-6](#) [793L](#) [997-M4](#) [HV101](#) [HV102](#) [HV200](#) [PC420AR-10](#) [PC420VP-50](#) [PC420VR-10](#) [786A](#) [786A-IS](#) [787A](#) [787A-IS](#) [HT786A](#) [HT787A](#) [PC420VP-10](#) [ADCMXL1021-1BMLZ](#) [ADIS16003CCCZ](#) [ADIS16228CMLZ](#) [ADXL700WBRWZ-RL](#) [ADXL103CE-REEL](#) [ADXL203CE-REEL](#) [ADXL206HDZ](#) [ADXL213AE](#) [ADXL213AE-REEL](#) [ADXL288WBRDZ-RL](#) [ADXL295WBRDZ-RL](#) [ADXL326BCPZ-RL7](#) [ADXL337BCPZ-RL7](#)