


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE, TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.		DESCRIPTION	DATE	APPROVED
A		NEW RELEASE	21/FEB/2012	

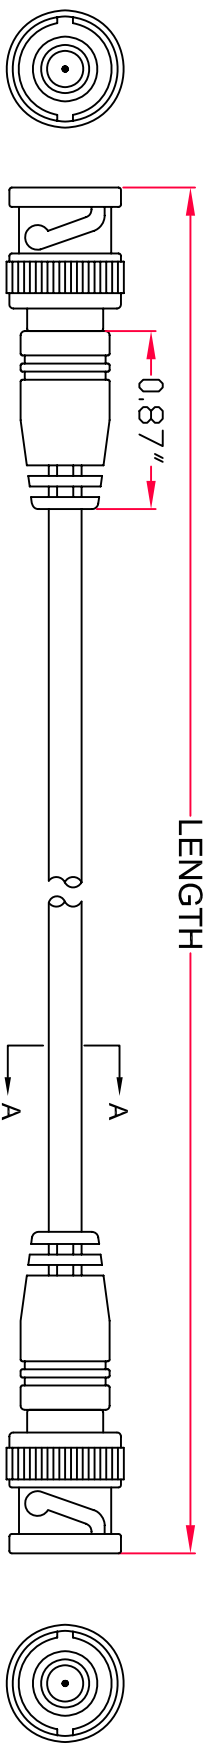


BNC M

BNC M


CABLE MARKING:
 AWM E119932 STYLE 1354 80°C 30V
 Amphenol Cables on Demand

- NOTES:
1. CABLE: [28AWG(7/0.127±0.01mm)]TC*1C+ BRAID[(16*5/0.10±0.008mm)] TINNED COPPER INSULATION: PE OD= 1.6±0.10mm COLOR: TRANSPARENT JACKET: HALF MATTE PVC OD=Ø2.80±0.15mm COLOR: BLACK
 2. CONNECTOR: BNC Male 75 OHM PIN GOLD FLASH, NICKEL PLATED SHIELD
 3. MOLDING SR: 45Pa PVC BLACK
 4. OPEN/SHORT MISS WIRE TEST 100%
 5. CONDUCTOR RESISTANCE ≅ 237.25Ω/km
 6. INSULATION RESISTANCE ≅ 2MΩ DC300V 0.01Sec



LENGTH & P/N Table

LENGTH	P/N
1FT(305±20mm)	AV-THLIN2BNCM-001
2.5FT(762±25mm)	AV-THLIN2BNCM-002.5
5FT(1524±30mm)	AV-THLIN2BNCM-005
7.5FT(2286±40mm)	AV-THLIN2BNCM-007.5
10FT(3048±50mm)	AV-THLIN2BNCM-010
15FT(4572±50mm)	AV-THLIN2BNCM-015
25FT(7620±100mm)	AV-THLIN2BNCM-025

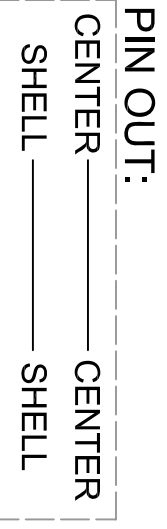

PIN OUT:



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EAR NO.		APPROVALS		DATE		DESCRIPTION	
DECIMALS				DRAWN	LF	21/FEB/2012		Amphenol Cables on Demand	
XX	±.XX			CHECKED	BA	21/FEB/2012		20 VALLEY ST. ENDCOTT, NY 13760	
XXX	±.XXX			RESP. ENG				UL1354 BNC M/BNC M	
				MFG ENG				SIZE	DWG. NO.
								A	AV-THLIN2BNCM-XXX
								SCALE	REV.
									A0

NOTES: UNLESS OTHERWISE SPECIFIED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [R288940005](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#)