

0.50mm Pitch FFC/FPC – F331 Series

RIGHT ANGLE ZIF BACK FLIP MECHANISM

F331 is a ZIF Flex connector (Right angle) with back side flip mechanism, small profile of 0.5mm pitch and 1.0mm height and its Pin count is available from 4 to 45 contacts.

- Easy to operate
- Strong FPC retention makes it vibration-proof
- Ensures high Solderability
- Ensures high durability
- Double side contact



TARGET MARKETS



FEATURES

- ZIF (Zero Insertion Force) mechanism requiring very little force for insertion
- Back flip locking mechanism
- Design against solder and flux wicking
- 20 mating cycles
- Double side contact
- 4 to 45 positions available
- Lead and halogen-free

BENEFITS

- No frictional mating wear resulting in high mating cycle life
- Easy to operate and strong FPC retention makes it vibration-proof
- Ensures high Solderability
- Ensures high durability
- Easy to operate
- Comprehensive range to satisfy all needs
- Meets environmental, health and safety requirements

TECHNICAL INFORMATION

MATERIAL

- Housing: LCP, natural color (UL94V-0)
- Actuator: PA9T, Black color (UL94V-0)
- Contact Terminal: Phosphor bronze
- Anchor-plate: Phosphor bronze

MECHANICAL PERFORMANCE

- FFC/FPC Retention Force: 0.15N/pin min.
- Terminal Retention Force: 0.3N/pin min.
- Anchor-plate Retention Force: 0.8N/pin min.
- Durability: 20 mating cycles

ELECTRICAL PERFORMANCE

- Voltage Rating: AC/DC 50V
- Current Rating: 0.5A
- Contact Resistance: 100mΩ max.
- Insulation Resistance: 500MΩ min.
- Dielectric Withstanding Voltage: No short or breakdown after AC 250V, 2mA, 1min.

PACKAGING

- Tape & Reel

APPROVALS AND CERTIFICATIONS

- UL 94V-0
- RoHS compliant

SPECIFICATION

- Aurora Product Specification: IS.EQC.164

ENVIRONMENTAL

- Operating Temperature Range: -55°C to +85°C

TARGET MARKETS/APPLICATIONS



Car Multimedia
Car Navigation
Dashboard
PND



Base Station
Power
Switches



Notebook
Tablets
Wearables
Gaming
DSC
LCD & PDP TV
Brewer
Cooker
Refrigerator



Sensing Element
Monitoring Camera
Human Machine




Ultrasonic
Patient Monitor
MRI
CT
Infusion Pump

PART NUMBERS

Description	Part Numbers
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 4P	F331-1A7H1-21004-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 6P	F331-1A7H1-21006-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 8P	F331-1A7H1-21008-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 10P	F331-1A7H1-21010-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 12P	F331-1A7H1-21012-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 14P	F331-1A7H1-21014-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 16P	F331-1A7H1-21016-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 20P	F331-1A7H1-21020-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 24P	F331-1A7H1-21024-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 26P	F331-1A7H1-21026-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 30P	F331-1A7H1-21030-E200
Flex Connector, P=0.50mm, H=1.00mm, Right angle orientation, Flip type, ZIF, Double contact, point 40P	F331-1A7H1-21040-E200

PART NUMBER SELECTOR

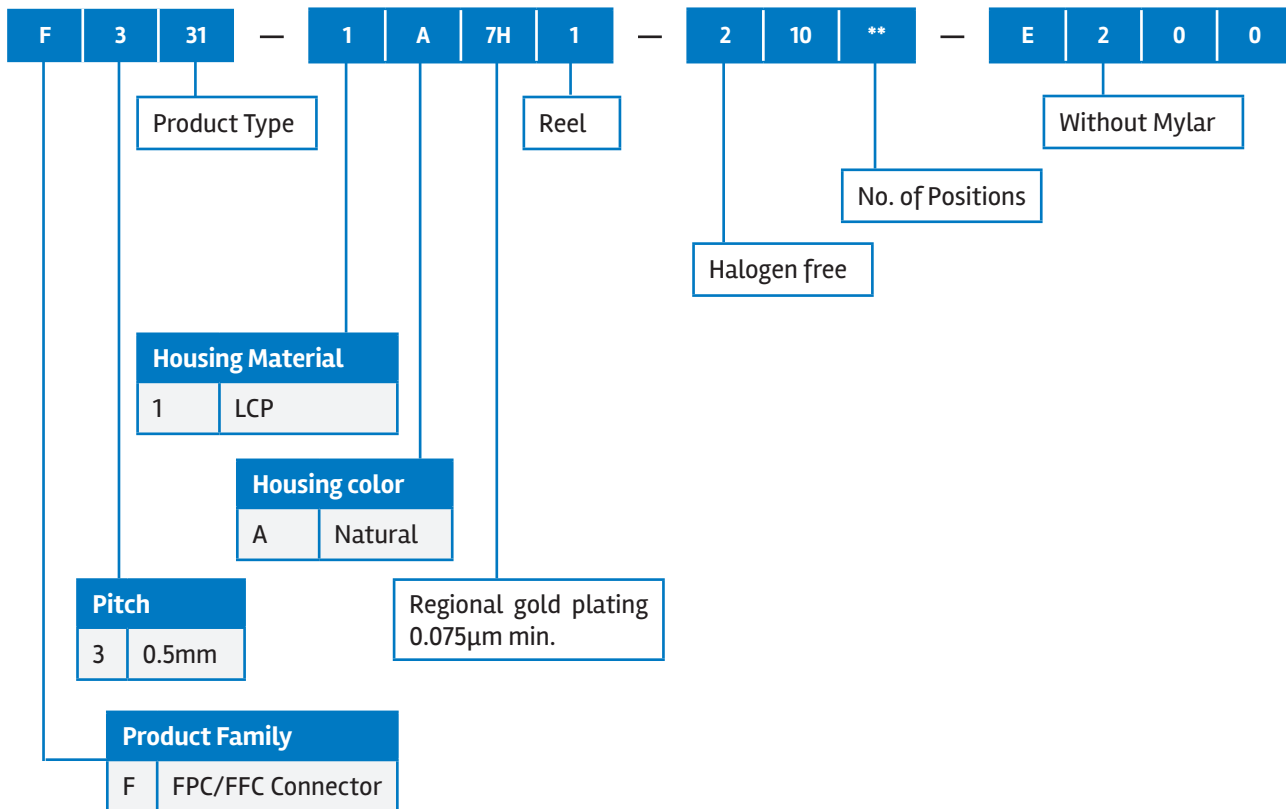

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[821-22-002-10-001101](#)