

FOR REFERENCE ONLY

B NX301HB1B-XX

SPECIFICATIONS:

AC RATING: 10 AMPS @115VAC (RESISTIVE LOAD)
 5 AMPS @115VAC (INDUCTIVE LOAD)
 3 AMPS @115VAC (LAMP LOAD)

DC RATING: 10 AMPS @28VDC (RESISTIVE LOAD)
 5 AMPS @28VDC (INDUCTIVE LOAD)
 3 AMPS @28VDC (LAMP LOAD)

TYPE 7 CONTACT ARRANGEMENTS:

1/2 AMPERAGE LOADS SHOWN ABOVE


MECHANICAL LIFE: 500,000 CYCLES
 ACTION: MOMENTARY SNAP OR PUSH PULL

OPERATING FORCE:
 SERIES 20 & 30: 3 TO 5 POUNDS MOMENTARY
 1/2 TO 2 POUNDS PUSH-PULL

SERIES 22 & 32: 2 TO 3 POUNDS MOMENTARY

WEIGHT: .050 POUNDS MAXIMUM
 CASE: ALUMINUM ALLOY 2011-T3,
 CLEAR ANODIZED IAW MIL-A-8625

PLUNGER: GLASS FILLED NYLON
 BODY: DIALLYL PHTHALATE IAW MIL-M-14
 TERMINALS: THREADED #2-56 NC-2B

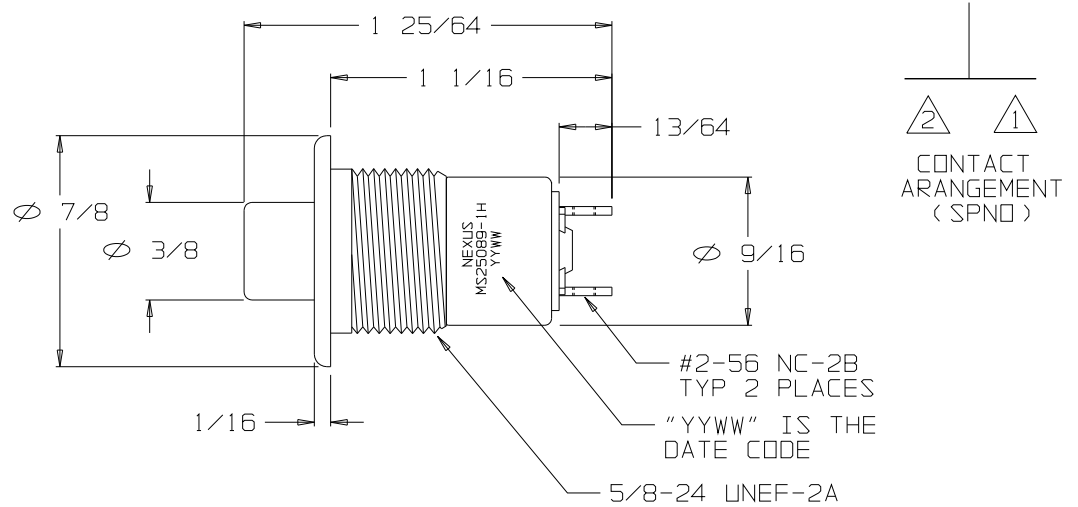

DESCRIPTION

DUSTPROOF "SERIES 300" MOMENTARY SWITCH
 CONTACTS SPNO - SINGLE POLE NORMALLY OPEN
 ADAPTER TYPE "H", COLOR BLACK
 BUTTON #1, COLOR BLACK


ORDERING INFORMATION:

NX301HB1B-00 SWITCH ONLY
 NX301HB1B-60 SWITCH, MOUNTING HARDWARE
 NX301HB1B-61 SWITCH, MOUNTING HARDWARE, TERNIMAL HARDWARE
 NX301HB1B-00EU SWITCH (ROHS) ONLY
 NX301HB1B-60EU SWITCH (ROHS), MOUNTING HARDWARE
 NX301HB1B-61EU SWITCH (ROHS), MOUNTING HARDWARE, TERNIMAL HARDWARE

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.




SW-200-23
 TERMINAL
 (2)



SW-200-34
 5/8-24 NUT
 (1)



SW-200-25
 #2 LOCKWASHER
 (2)



SW-200-35
 5/8 LOCKWASHER
 (1)



SW-200-72
 #2-56 SCREW
 (2)

TERMINAL
 HARDWARE

MOUNTING
 HARDWARE

DWN. BY	EWT	DATE	11/14/06	MATERIAL	N/A
CHECKED BY		DATE		FINISH	N/A
APPR. BY		DATE		WEIGHT	—
				SCALE	N/A
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON .XX .XXX ANGLES — ±.003 ±.5°				TITLE SWITCH SPNO MOMENTARY (MS25089-1H)	
				DD NOT SCALE DWG. SHEET 1 OF 1	
SIZE		DWG. NO.		NEXUS STAMFORD, CONN	
B		NX301HB1B-XX			

LET.	REVISION	CN #	DATE	CHK.
------	----------	------	------	------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pushbutton Switches](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[8940K2012](#) [LW1L-M1C10V-A](#) [LW1L-M1C70-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M22-D-R-GB0/K11](#) [M7E-HRN2](#)
[67021K512](#) [67081K512X](#) [701PB580](#) [7190K101](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [MML21EA2ADK](#) [MML21KA3ABK](#)
[MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#) [861K11911T01A07](#)
[861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [8646ABUL](#) [9001KXRK](#) [907AYY100](#) [PMHD155A1](#) [95-313.000](#)
[9533CD4+U574+U4922](#) [95-414.000](#) [99-450.837](#) [99-453.837](#) [PV3H2B0NN-341](#) [1203MRA](#) [A22NZBGANGA](#) [A22NZBMMNGA](#)
[A22NZBNANGA](#) [A22NZMPATRA](#) [A2PMA1X03EC56](#) [A3A-5123-02](#) [A3A-7140](#) [A3A-7310](#) [A3A-7340](#) [A3U-TMW-A2C-5M](#) [A595](#)