

# FOR REFERENCE ONLY

## SPECIFICATIONS:

AC RATING: 10 AMPS @115VAC (RESISTIVE LOAD)  
 5 AMPS @115VAC (INDUCTIVE LOAD)  
 3 AMPS @115VAC (LAMP LOAD)

DC RATING: 10 AMPS @28VDC (RESISTIVE LOAD)  
 5 AMPS @28VDC (INDUCTIVE LOAD)  
 3 AMPS @28VDC (LAMP LOAD)

TYPE 7 CONTACT ARRANGEMENTS:  
 1/2 AMPERAGE LOADS SHOWN ABOVE

MECHANICAL LIFE: 500,000 CYCLES  
 ACTION: MOMENTARY SNAP OR PUSH PULL

OPERATING FORCE:  
 SERIES 20 & 30: 3 TO 5 POUNDS MOMENTARY  
 1/2 TO 2 POUNDS PUSH-PULL  
 SERIES 22 & 32: 2 TO 3 POUNDS MOMENTARY



WEIGHT: .050 POUNDS MAXIMUM

CASE: ALUMINUM ALLOY 2011-T3,  
 CLEAR ANODIZED IAW MIL-A-8625

PLUNGER: GLASS FILLED NYLON  
 BODY: DIALLYL PHTHALATE IAW MIL-M-14

TERMINALS: THREADED #2-56 NC-2B

**B** NX321AB1B-XX

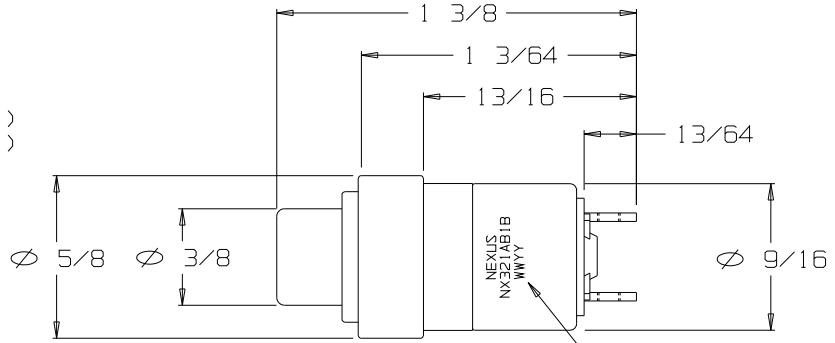

"WWYY" IS THE DATE CODE

## DESCRIPTION

DUSTPROOF "SERIES 32" MOMENTARY SWITCH  
 CONTACTS SPNO - SINGLE POLE NORMALLY OPEN  
 ADAPTER TYPE "A", COLOR BLACK  
 BUTTON #1, COLOR BLACK

## ORDERING INFORMATION:

NX321AB1B-00 SWITCH ONLY  
 NX321AB1B-01 SWITCH, TERNIMAL HARDWARE  
 NX321AB1B-00EU SWITCH (ROHS) ONLY  
 NX321AB1B-01EU SWITCH (ROHS), TERNIMAL HARDWARE



SW-200-23  
 TERMINAL  
 (2)



SW-200-25  
 #2 LOCKWASHER  
 (2)



SW-200-72  
 #2-56 SCREW  
 (2)

TERMINAL  
 HARDWARE

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.

DWN. BY	EWT	DATE	11/14/06	MATERIAL	N/A
CHECKED BY		DATE		FINISH	N/A
APPR. BY		DATE		WEIGHT	—
				SCALE	N/A
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON				TITLE SWITCH SPNO MOMENTARY 2 LB	
.XX .XXX ANGLES ±.5°				NEXUS STAMFORD, CONN	
DO NOT SCALE DWG.				SIZE	B
SHEET 1 OF 1				OWG. NO.	NX321AB1B-XX

LET.	REVISION	CN #	DATE	CHK.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pushbutton Switches](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[8940K2012](#) [LW1L-M1C10V-A](#) [LW1L-M1C70-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M22-D-R-GB0/K11](#) [M7E-HRN2](#)  
[67021K512](#) [67081K512X](#) [701PB580](#) [7190K101](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [MML21EA2ADK](#) [MML21KA3ABK](#)  
[MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#) [861K11911T01A07](#)  
[861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [8646ABUL](#) [9001KXRK](#) [907AYY100](#) [PMHD155A1](#) [95-313.000](#)  
[9533CD4+U574+U4922](#) [95-414.000](#) [99-450.837](#) [99-453.837](#) [PV3H2B0NN-341](#) [1203MRA](#) [A22NZBGANGA](#) [A22NZBMMNGA](#)  
[A22NZBNANGA](#) [A22NZMPATRA](#) [A2PMA1X03EC56](#) [A3A-5123-02](#) [A3A-7140](#) [A3A-7310](#) [A3A-7340](#) [A3U-TMW-A2C-5M](#) [A595](#)