

PROMI

In Line Miniature Optical Adaptor - ARINC 801 Termini



For easy installation & maintenance, the **PROMI** is the solution for optical link in harsh Environment. The **PROMI** (In Line Miniature Optical Adaptor) may be used on patchords already in place. For a reduced space, where the connector is not suitable, the PROMI allows the division of the link into several sections. This optical Miniature extender **PROMI** realizes a very compact removable splice.

MAIN FEATURES

SPECIFICATION	MEASUREMENT DETAILS	STANDARD	METHOD
Insertion loss	0.2dB Typ. 0.7 dB max 850/1300nm Multimode 0.3dB Typ. 0.7 dB max 1310/1550nm Singlemode	EN 2591-6101	TIA-455-34
Vibration	Ambient temperature - 1g ² /Hz Duration : 8 hours in 2 axis, X and Y direction. Duration of micro-discontinuity: <4μs IL max 0,7db Duration: 8h / axe – 2 axes	EN 2591-6403	Method B, level J
Sealing	Immersion under 10cm of water during 30min.		
Salt spray	500h (matted)	EN 2591-6307	
Operating temperature	-55°C +125°C (depends on cable type)	EN 2591-617	
Mating durability	500 cycles	MIL-DTL-38999	TIA-455-21
Cable retention	68 N / 3 pulls / 1 min (due to ARINC801 terminus) (depends on cable type)	EN 2591-610	

MARKETS & APPLICATIONS

Markets

- **MILITARY:** C4ISR, UAV, radar, missile
- **MILITARY AVIONICS:** head up display, radar
- **COMMERCIAL AVIONICS:** IFE
- **INDUSTRIAL HEAVY DUTY ENVIRONMENT**

Applications

- Rotary JOINT
- Shelter
- Radar
- Missile

VIDEO




See our new video
"Amphenol Promi assembly - In Line Miniature Adaptor - for ARINC 801 termini"




DIMENSIONS

PROMI WITHOUT BOOT

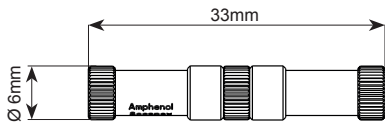



PROMI WITH SEALING BOOT

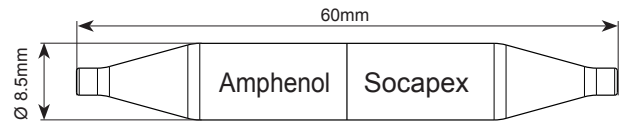

HOW TO ORDER

HOW TO ORDER	PRO	MM	A801	00	18	00	A	B	Q100
Series PRO : PROMI series									
Adaptor MM : Male/male adaptor									
Type of optical contact A801: Arinc 801 termini type, size 1,25mm									
Type of product 00 : In line adaptor									
Cable diameter 18 : 900µm to 1.8mm									
Termini Option 00 : Without ARINC 801 termini 01 : With 2 Multimode ARINC 801 termini 05 : with 2 Singlemode ARINC 801 termini									
NUT TYPE A : Standard nut B : Split nut									
BOOT - : Without boot B : With sealing boot (only for cable 1.8mm)									
PACKAGING - : Unit Q100 : kit of 100 units									

ASSEMBLING YOUR PROMI WITHOUT TOOLS

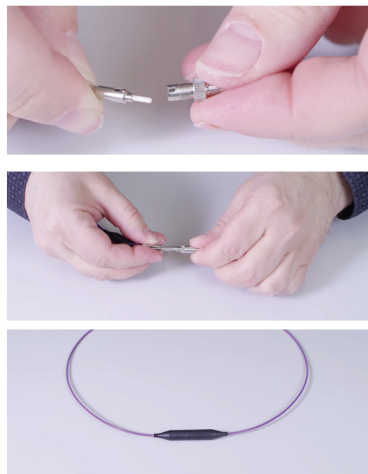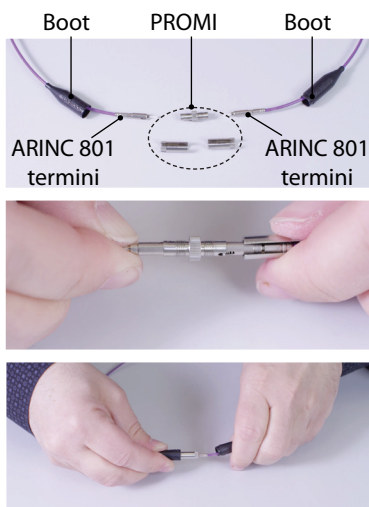

VIDEO



See our new video
"Amphenol Promi assembly - In Line Miniature Adaptor - for ARINC 801 termini"

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[0004700001](#) [6100-R](#) [6313](#) [F709722200](#) [F709730000](#) [F718183204](#) [F727403500](#) [F727752800](#) [8119](#) [9440F20-27S-190](#) [944-120-6001](#)
[9441F10SL-3S](#) [9444W28-21S](#) [9444W36-10S](#) [9446W20-16S](#) [953-101-5310-P](#) [954-101-57202B](#) [A0270169](#) [12-9122](#) [12-5702](#) [AX101713](#)
[AX102420](#) [AX103923](#) [AX104024](#) [AX104193](#) [AX104230](#) [AX104562](#) [AX105203-B25](#) [AX105205-S1](#) [EHSC2M](#) [17-300800](#) [181-011-126](#)
[181-011-S](#) [181-057-126](#) [NKSOPBUY](#) [20500002116](#) [2064996-1](#) [20800001065](#) [2170](#) [9132](#) [2612](#) [2620](#) [9291](#) [9440F16-10S](#) [9440F20-18S](#)
[9444W32-73S](#) [9446F16-10S-190](#) [953-106-50231](#) [953-120-5003](#) [955-120-5110](#)