


PSW SERIES PLUNGER SWITCH

PSW-1


The PSW-1 is a SPST N.O. Plunger Switch for closed circuit loop. The plungers 7mm overall stroke allows for only 3mm operating stroke. This device can be utilized as a tamper switch. It comes with #22 lead wires that are 25" long.

PSW-1H -adapter housing for PSW-1

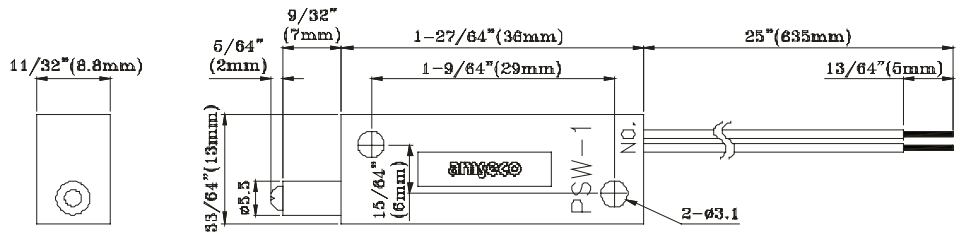


PSW-2

The PSW-2 normally closed and normally open SPST dual switches allow the PSW-2 to be used as SPDT transfer circuit. The plunger has a 7mm overall stroke and the lead wires are #22 and 25" long.

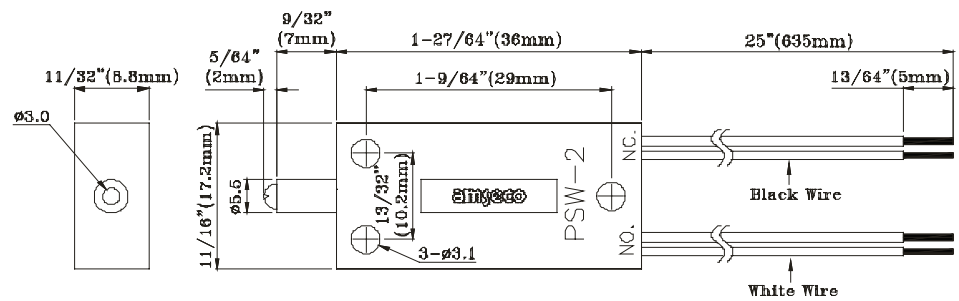


PSW-21

The PSW-21 is a SPST plunger switch for a closed circuit loop. It will fit into a 3/8" drilled hole for recessed mounting. The lead wires are #22 and 25" long.

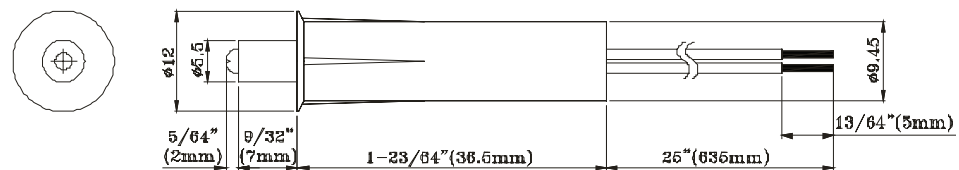

PSW-22

The PSW-22 is a SPST N.O. type for a closed circuit system. It will fit into a 3/8" drilled hole for recessed mounting. The lead wires are #22 and 25" long.

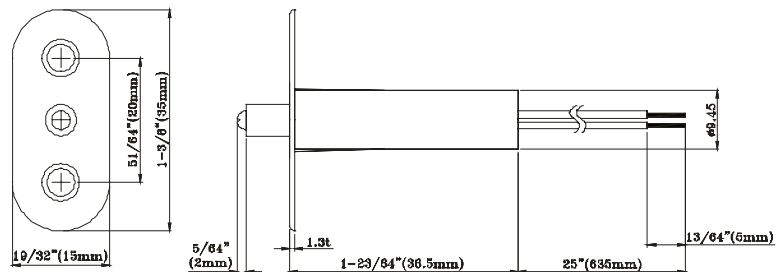

| Model Number | Color | Stock Number | Contact | Contact Rating | Contact Type | Max. Carry Current | Max. Switching Current | Breakdown Voltage | Operating Force | | |
|--------------|-------|--------------|--------------------|----------------|------------------|--------------------|------------------------|-------------------|-----------------|--------|----------|
| PSW-1 | Ivory | 4360006 | 22 AWG 25" lead | 10VA | Form A N.O. | 1 Amp | .3 Amp | 200 VDC | 100-200g | | |
| PSW-2 | Brown | 4360007 | | | Form C N.O./N.C. | | | | | | |
| | Gray | 4360008 | | | | | | | | | |
| | Ivory | 4360009 | | | | | | | | | |
| PSW-21 | Brown | 4360010 | | | Form A N.O. | | | | | .4 amp | 200-300g |
| | Gray | 4360011 | | | | | | | | | |
| PSW-22 | Ivory | 4360013 | Form A N.O. | | | | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Magnetic/Reed Switches](#) category:

Click to view products by [Amseco](#) manufacturer:

Other Similar products are found below :

[PSW-21](#) [AMS-20MG](#) [AMS-37-G_W/Brk](#) [AMS-38S-I](#) [AMS-38SW](#) [AMS-39B-B](#) [HRB10030](#) [2116900170](#) [AMS-10S-B](#) [AMS-25B-B](#) [AMS-37BROWN](#) [AMS-37L](#) [AMS-38MG](#) [AMS-38SB](#) [AMS-9-B](#) [AMS-T10C\(B\)](#) [505-171W](#) [WHITE](#) [505-211B](#) [505-70B](#) [HM00-01800](#) [4350186](#) [505-101-GC](#) [505-101-GS](#) [505-101-WS](#) [505-392W](#) [505-90G](#) [505-90I](#) [507-381BB](#) [RSW-21A-I](#) [ODC-56B](#) [RI-90GP1020](#) [FF6-21-DC-03-SS](#) [FF6-11-AC-06](#) [FF6-21-AC-06](#) [AMS-10MGW](#) [AMS-37B](#) [GRAY](#) [HM00-01608LF](#) [HM00-04603LF](#) [HM00-02441BLFTR](#) [KSK-1A80/1-1015](#) [44531-0110](#) [44531-0200](#) [44531-0260](#) [35-756](#) [KSK-1A52-1520](#) [KSK-1C90U-1530](#) [KSK-1E85-BV470](#) [MLRR-4-22-28](#) [MLRR-3-42-48](#) [MISM-3V1R-8-12.5](#)