

Optolinx FCU-3002A-SFP

10/100/1000BaseT to 1000BaseX Combo (SFP) Media Converter




Features


- ▶ Complies with IEEE 802.3u/ab 10/100/1000BaseT
- ▶ Complies with IEEE 802.3z 1000BaseX
- ▶ Supports Jumbo Frame (9K bytes)
- ▶ Store-and-Forward Switching Mechanism
- ▶ Auto-Crossover for MDI/MDIX in TP Port
- ▶ Auto-Negotiation in TP Port
- ▶ Supports 1 SFP Slot
- ▶ Supports Flow Control
- ▶ Supports Link Alarm
- ▶ Supports Auto & Force Mode Configuration
- ▶ 5-Year Warranty




▶ Specifications

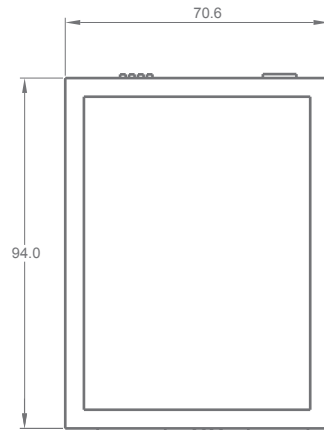

Top View

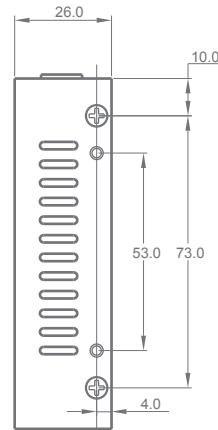

Side View



Panel View



Rear View

► Specifications

Standard

IEEE 802.3z 1000BaseX
IEEE 802.3 10BaseT
IEEE 802.3u 100BaseTX
IEEE 802.3ab 1000BaseT
IEEE 802.3x Flow Control

Interface

10/100/1000BaseT: 1 x RJ45 Port
Fiber: 1 x SFP Slot

Wavelength

*See SFP Specifications

Typical Distance

*See SFP Specifications

Minimum TX Power

*See SFP Specifications

Maximum TX Power

*See SFP Specifications

Sensitivity

*See SFP Specifications

Link Budget

*See SFP Specifications

LED

Power, FDX, Status, Speed, FO Link/ACT, TX Link/ACT

MAC Address Table

1 K

Memory Buffer

128 KB

Forward/Filter Rate

10M: 14,880/14,880pps
100M: 148,800/148,800pps
1000M: 1,488,000/1,488,000pps

Power

External Power Supply: DC 5V, 1.5A
50, 60 Hz

Power Consumption

3 Watts

Operation Temperature

0° C to 50° C (32° F to 122° F)

Storage Temperature

-20° C to 60° C (-4° F to 140° F)

Operation Humidity

5% to 90% (Non-condensing)

Mechanical

Casing: IP30 Metal Case
Dimension (W x H x D): 71 x 94 x 26 mm (2.80 x 3.70 x 1.02 inches)
Weight: 0.6 Kg (1.3 lbs)
Installation: DIN-Rail/Wall Mountable

Emission/Safety

FCC Class A, CE

Warranty

5-Year Warranty

► Ordering Information

FCU-3002A-SFP

10/100/1000T - 1000X SFP Media Converter, Standalone Module ***

*** SFP MODULES SOLD SEPARATELY ***

Optional Accessories

SFP-M

SFP Module, Multi-Mode, 550m

SFP-S10

SFP Module, Single-Mode, 10Km

FCU-BK

Mounting Brackets for FCU Modules

DIN-RAIL-KIT

DIN-Rail Mounting Kit

Antaira Technologies

Toll-Free: (877) 229-3665
Phone: (714) 671-9000
FAX: (714) 671-9944

e-Mail: info@antaira.com
Website: <http://www.antaira.com>


www.antaira.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [ANTAIRA](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)