


EmQ-i2506



Intel® Atom™ N2600 Qseven™ CPU Module



Features

- **Fanless Design**
- Soldered Onboard Intel® Atom™ N2600 Processor
- Integrated Gigabit Ethernet
- Single Channel 18-bit LVDS, Analog RGB, DDI Port
- **Extended Operating Temp.: -20 ~ 70°C**

System

CPU	Soldered onboard Intel® Atom™ N2600 1.6GHz processor
Memory	Soldered onboard 2GB DDR3 SDRAM
Chipset	Intel® PCH NM10
BIOS	AMI UEFI BIOS
Watchdog Timer	1~255 levels reset

I/O

USB Port	8 x USB 2.0 ports
Expansion Bus	3 x PCIe x1 lanes LPC (Low Pin Count) interface
Storage	2 x Serial ATA ports with 300MB/s HDD transfer rate
Ethernet Chipset	1 x Intel® 82583V PCIe GbE controller
Audio	HD Audio Link


Display

Graphics Chipset	Integrated Intel® Graphics Media Accelerator 3600 LCD: Single Channel 18-bit LVDS, resolution up to 1366x768
Graphics Interface	Support Analog RGB signals (via Qseven GF reserved pin) 1 x DDI port


Mechanical & Environmental

Power Requirement	5V, 5VSB
Power Consumption	1.26A@+12V (Typical)
Operating Temp.	-20 ~ 70°C (-4 ~ 158°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Dimension (L x W)	70 x 70 mm (2.76" x 2.76")

Dimensions

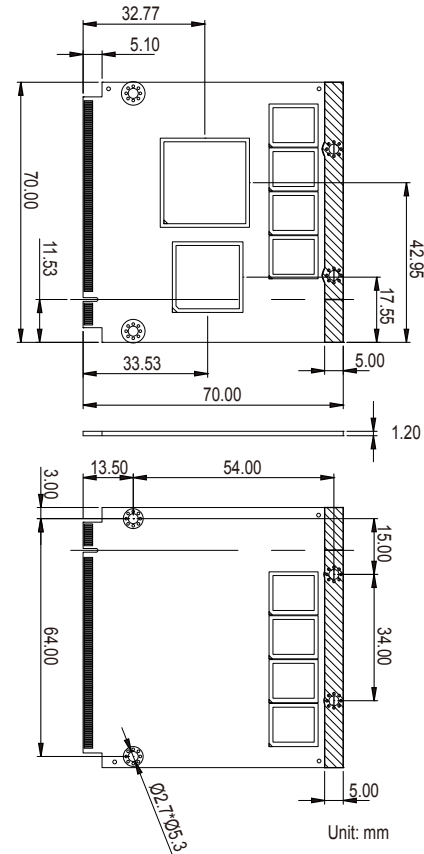

Block Diagram

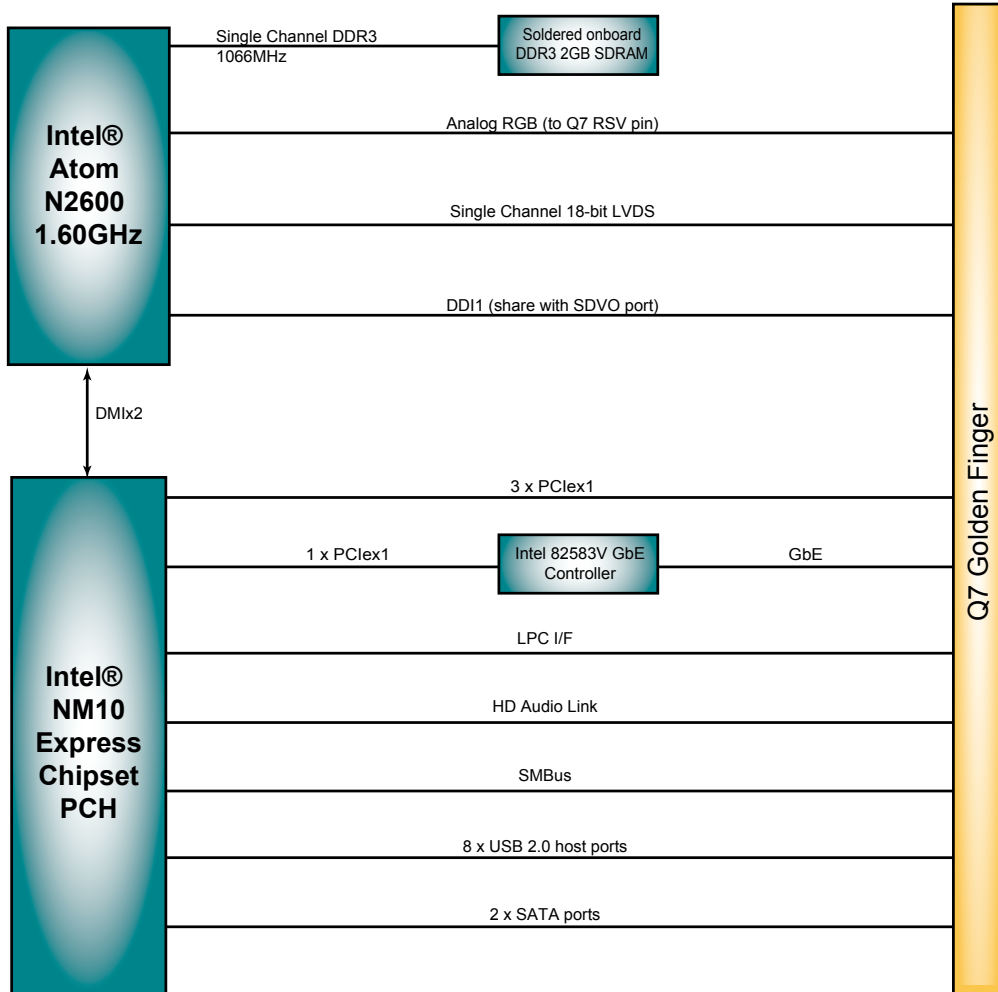

Ordering Information

EmQ-i2506 Intel® Atom™ N2600 1.6GHz Qseven™ CPU module

StarterKit-003-2506 Qseven™ Starter Kit for EmQ-i2506

Optional Accessories

HS-2506-F1 Heat spreader (70.0x65.0x8.0mm)

HS-0000-W3 Universal evaluation heatsink kit for Qseven CPU module (70x70x30mm)

PBQ-3000 Qseven™ EPIC evaluation board

Page 60

CBK-06-3000-00 Cable kit

- 1 x USB cable
- 1 x USB2 cable
- 2 x Serial port cables
- 1 x SATA cable
- 1 x SATA power cable

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Computer-On-Modules - COM category](#):

Click to view products by [Arbor Technology manufacturer](#):

Other Similar products are found below :

[FP2-BP12](#) [CEM881PG-i7-5650U](#) [t2Express-HL-i5-4402E](#) [38017-0000-00-0](#) [36024-0000-99-1](#) [34099-0000-99-0](#) [36026-0000-99-1](#) [36026-0000-99-0](#) [38017-0000-00-5](#) [36016-4000-19-4](#) [VSTK-6ULL-NFC](#) [Express-SL-i7-6820EQ](#) [W612M3A600SC](#) [24828-107](#) [24571-309](#) [30846-682](#) [ET970K-X3G](#) [UPC-PLUSX5Q-A20-0464](#) [UPC-PLUSX7-A20-08128](#) [UPC-PLUSX5D-A20-0232](#) [UPC-PLUSX7-A20-0864](#) [UPX-WHLCR-A20-04064](#) [cExpress-BL-i5-5350U](#) [Express-BD7-D1539](#) [Express-CF-i3-8100H](#) [Express-CFR-E-2254ML](#) [Express-HLE-i3-4100E](#) [Express-IBR-i7-R-3612QE](#) [LEC-BT4-4G-8G-ER](#) [nanoX-BT-E3845-4G](#) [Q7-BT1-2G-8G-ER](#) [ROM-3310CS-MCA1E](#) [ROM-3310WS-MCA1E](#) [EmNANO-a56M0-210HA](#) [EmQ-i2301-E3825](#) [EmQ-i2301-E3845](#) [EmQ-i2506](#) [G552BE](#) [CEM130-V1202B](#) [CEM700-D1508](#) [conga-QA3E/E3815-2G](#) [eMMC4](#) [ET976-1807LV-4G](#) [ET976-1202-4G](#) [ET976-1605-4G](#) [ET976-1605LV-4G](#) [ET976-1605LV-8G](#) [ET976-1807LV-8G](#) [ET976-1202LV-E4G](#) [RM-N8MMI-Q208I](#) [ICE-BT-T10-E38251-R10](#)