

0936 - 0938 Push Button Switches 0.5A 250Vac

In house test 0.5A 250Vac
In house test 0.25A 250Vdc
 μ contact gap
 Technical data on pages 4 & 5



C0936PC



C0938MA

B BLACK
W WHITE
R RED
G GREEN


C 0936 P B A

TERMINAL CODE FUNCTION CODE ACTUATOR CODE ACTUATOR COLOR BODY CODE


ORDER FORMAT

TERMINAL CODE	FUNCTION CODE	ACTUATOR CODE	BODY CODE	OPTIONS
C 8.3 6.3 x 0.8	0936 ON - OFF (momentary ON)	P Small round push 	C Nylon top plate and fixing neck 12.7 Back nut must be fitted	Push button finish Gloss finish only Push button color Black, white, red, green for other colors call the factory Cover M327 Available for "P" actuator
	0938 ON - OFF (momentary OFF)	K Round push and bezel Specify Satin chrome or nylon (black / white) bezel	A Metal top plate and fixing neck For Low Voltage (up to 50V) only 12.7 Back nut must be fitted	

Dimensions (mm) 0936 / 0938 P



0936 / 0938 K or M

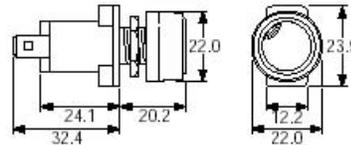

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [arcoelectric](#) manufacturer:

Other Similar products are found below :

[F0167LOAAA](#) [H8300ABBB](#) [H8550XBDDR076R](#) [H8550XBDDG076G](#) [H8553VDDG3](#) [H8553VDBA3](#) [H8620VDD](#) [H8650VDD076W](#)
[H8650VDD](#) [H8653VDD3076W](#) [NL275C3A-CHROME](#) [NL67H2A](#) [C1510AABW](#) [C1550WABWCL050B](#) [C7053AFBA3](#) [279672](#)
[H8550VDD](#) [H8601VDD](#) [H8660VDD](#) [H8800VABB](#) [R13208FBB](#) [C1550WABB602AW](#) [C6053ALBR31197W](#) [3700](#) [LE2870C5G](#)
[LHM62R](#) [512F10AE222](#) [T8550VDD076W](#) [64F500FA383](#) [C1520ALMDD730W](#) [C1300AAAAA](#) [C1500VQDWW](#) [T0340RA](#) [L104100FAF](#)
[H8503VDD2](#) [H8503VDBAE](#) [NL67C2R](#) [C3900BA](#) [NL2950BWL2A](#) [C6053ALBG31197WB](#) [NL177WL2R](#) [C480AABA7](#) [H8503VDD2-B](#)
[468](#) [LH1050WL-3602](#) [NL2870WL3R-VDE](#) [NL177WL3G](#) [C5503ATBR2](#) [C6090ALBR2-1197W-B](#) [LE177C39007](#)