



Series 450001 and 650000 SOIC and SOJ-to-DIP Adapter

FEATURES


- A cost-effective means of upgrading to SOJ or SOIC without changing your PCB layout.
- Available on 0.400 [10.16] and 0.600 [15.24] centers. Consult **Data Sheet 18010** for Adapters on 0.300 [7.62] centers.

GENERAL SPECIFICATIONS

- BOARD MATERIAL: 0.062 [1.58] thick FR-4 or IS410 per IPC 4101A/26 with 1-oz. Cu traces, both sides
- PADS: finished with HASL
- PINS: Brass 360 1/2-hard per UNS C36000, ASTM B16/B16M
- PIN PLATING: Sn/Pb
- OPERATING TEMPERATURE: 221°F [105°C]

MOUNTING CONSIDERATIONS


- SUGGESTED PCB HOLE SIZE: 0.028 ±0.002 [0.71 ±0.05] dia.

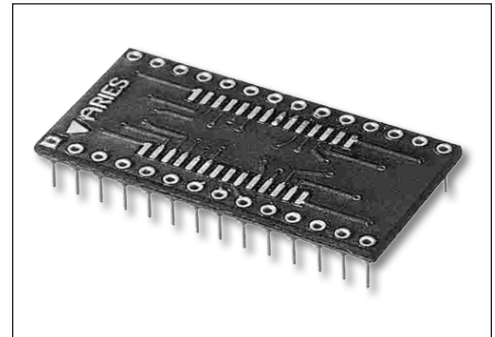

CUSTOMIZATION: In addition to the standard products shown on this page, Aries specializes in custom design and production. Special materials, platings, sizes, and configurations can be furnished, depending on the quantity. **NOTE:** Aries reserves the right to change product general specifications without notice.

ORDERING INFORMATION

(See Table below)

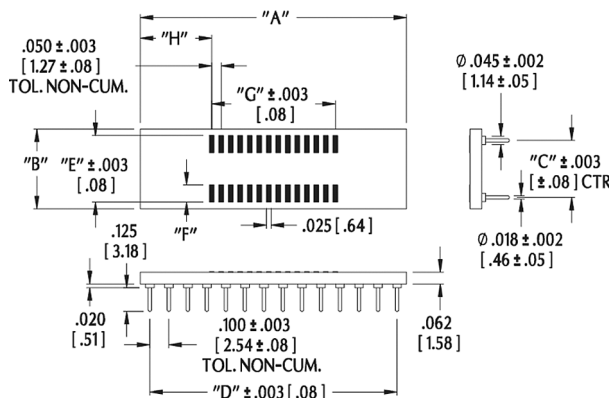

ALL DIMENSIONS: INCHES [MILLIMETERS]
 ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED
 "A" = NO. OF PINS PER ROW X 0.100 [2.54]
 "D" = (NO. OF PINS PER ROW - 1) X 0.100 [2.54]
 AVAILABLE IN PANELIZED FORM WITH OR WITHOUT CUSTOMER-SUPPLIED DEVICES MOUNTED. CONSULT FACTORY.
 CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

P/N	Pins	Type	Dim. "B"	Centers "C"	Dim. "E"	Dim. "F"	Dim. "G"	Dim. "H"
28-450001-10	28	SOJ	0.480 [12.19]	0.400 [10.16]	0.460 [11.68]	0.080 [2.03]	0.650 [16.51]	0.325 [8.26]
32-450001-10	32	SOJ	0.530 [13.46]	0.400 [10.16]	0.500 [12.70]	0.090 [2.29]	0.750 [19.05]	0.425 [10.80]
32-650000-10	32	SOJ	0.700 [17.78]	0.600 [15.24]	0.650 [16.51]	0.200 [5.08]	0.750 [19.05]	0.425 [10.80]
24-650000-10	24	SOIC	0.700 [17.78]	0.600 [15.24]	0.455 [11.56]	0.150 [3.81]	0.550 [13.97]	0.180 [4.57]
28-650000-10	28	SOIC	0.700 [17.78]	0.600 [15.24]	0.450 [11.43]	0.075 [1.91]	0.650 [16.51]	0.375 [9.53]



ARIES
ELECTRONICS, INC.

Bristol, PA 19007-6810 USA
 TEL (215) 781-9956 • FAX (215) 781-9845
 WWW.ARIESELEC.COM • INFO@ARIESELEC.COM

PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED

18011
Rev. AB

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IC & Component Sockets](#) category:

Click to view products by [Aries](#) manufacturer:

Other Similar products are found below :

[0066-3-17-15-30-14-02-0](#) [670](#) [672](#) [673](#) [694-13-640-00-672-000](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-308-41-007000](#) [PX-68LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [12-3513-11](#) [123-91-320-41-001000](#) [126-43-310-41-002000](#) [AKSUN 37V-T](#) [1437503-9](#) [1437504-1](#) [146-44-308-41-013000](#) [146-43-308-41-012000](#) [160-10-308-00-001000](#) [160-40-320-00-001000](#) [214-99-306-01-670800](#) [232-1270-02-0602](#) [2-382761-4](#) [2-5331677-4](#) [2-640360-3](#) [2801-2-00-50-00-00-07-0](#)