

## ASA Series

6 Watts

Total Power: 6 Watts  
Input Voltage: 12V, 24V or 48V  
# of Outputs: Single, Dual

### Special Features

- Encapsulated
- Wide 4:1 input range
- 1.25" X 0.8" DIP package
- 1500Vdc I/O isolation
- Single and Dual output



## Electrical Specifications

### Input

Input range 9 to 36 VDC; 18 to 75 VDC  
Efficiency<sup>2</sup> 81%@5Vo

### Output

Voltage tolerance  $\pm 2.0\%$   
Line regulation  $\pm 0.5\%$   
Load regulation Single output: 1% @ 3.3Vo  
Other:  $\pm 0.5\%$   
Dual output:  $\pm 3.0\%$   
Noise/ripple 3.3Vo, 5Vo: 100mV  
12Vo: 120mV  
15Vo: 150mV  
Short circuit protection Auto-restart  
Switching frequency 250KHz  
Temperature coefficient  $\pm 0.02 / ^\circ\text{C}$

### Isolation

I/O isolation 1500 VDC min.  
Insulation resistance 10Mohm  
Insulation capacitance 1000pF

## Environmental Specifications

Operating ambient temperature range  $-40^\circ\text{C}$  to  $+71^\circ\text{C}$  (no derating)  
Storage temperature  $-55^\circ\text{C}$  to  $+105^\circ\text{C}$   
Humidity 5% to 95% (non-condensing)  
MTBF 1 Mhrs demonstrated MTBF  
RoHS Compliant

### Safety

CE Mark





## Ordering Information

Input Voltage	Output 1 Voltage	Output 2 Voltage	Maximum Power	Model Number
9-3 6V	3.3V @ 1.2A		3.96W	ASA01F18-L
9-3 6V	5V @ 1.00A		5W	ASA01A18-L
9-3 6V	12V @ 0.50A		6W	ASA00B18-L
9-3 6V	15V @ 0.40A		6W	ASA00C18-L
9-3 6V	5V @ 0.50A	-5V @ 0.5A	5W	ASA00AA18-L
9-3 6V	12V @ 0.25A	-12V @ 0.25A	6W	ASA00BB18-L
9-3 6V	15V @ 0.20A	-15V @ 0.20A	6W	ASA00CC18-L
18 - 75V	3.3V @ 1.2A		3.96W	ASA01F36-L
18 - 75V	5V @ 1.00A		5W	ASA01A36-L
18 - 75V	12V @ 0.50A		6W	ASA00B36-L
18 - 75V	15V @ 0.40A		6W	ASA00C36-L
18 - 75V	5V @ 0.50A	-5V @ 0.5A	5W	ASA00AA36-L
18 - 75V	12V @ 0.25A	-12V @ 0.25A	6W	ASA00BB36-L
18 - 75V	15V @ 0.20A	-15V @ 0.20A	6W	ASA00CC36-L

Please contact Astec for information on other output voltages, power ranges and configurations. Available in RoHS 6 version only.

## Mechanical Drawing

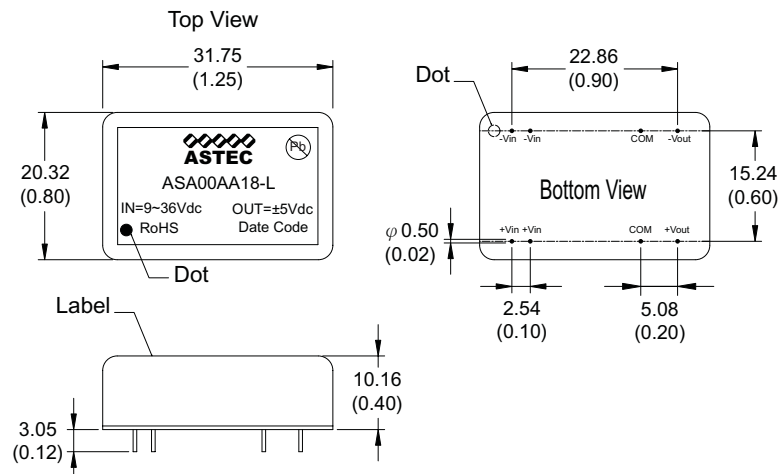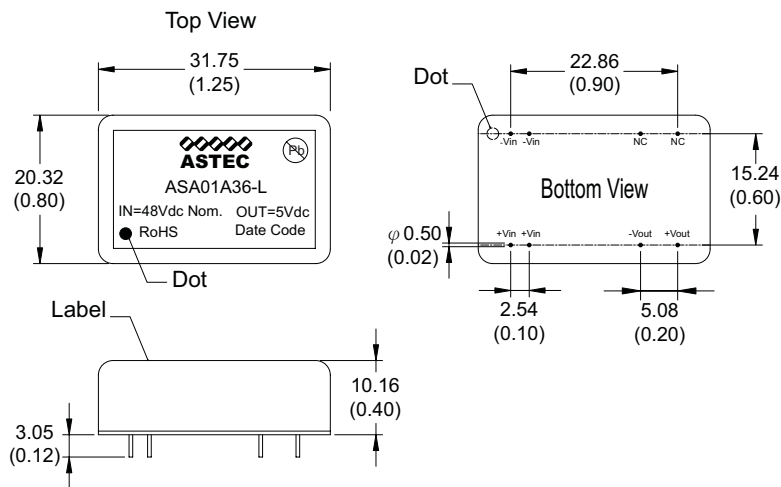

### Notes:

1. All specifications subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 1 yr
3. Label and logo appearance may vary from what is shown on mechanical drawings.

## Astec Power

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698  
Technical Support: +1 888 41 ASTEC  
or +1 407 241 2752

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

Units 2111-2116, Level 21  
Tower 1, Metroplaza  
223, Hing Fong Road  
Kwai Fong, New Territories  
Hong Kong  
Telephone: +852 2437 9662  
Facsimile: +852 2402 4426

For global contact, visit:

[www.astecpower.com](http://www.astecpower.com)  
[technicalsupport@astec.com](mailto:technicalsupport@astec.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Astec Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Printed in USA

**Emerson Network Power.**  
The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

**EmersonNetworkPower.com**

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2006 Emerson Electric Co.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [Artesyn Embedded Technologies](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [VI-26B-CU](#) [V24C12C100BG](#) [L-DA20](#) [HP3040-9RG](#) [HP1001-9RTG](#) [DCG40-5G](#) [XKS-2415](#) [XKS-2412](#)