

# Capacitor Array



## Automotive Capacitor Array (IPC)



0508 - 4 Element



0612 - 4 Element

As the market leader in the development and manufacture of capacitor arrays AVX is pleased to offer a range of AEC-Q200 qualified arrays to compliment our product offering to the Automotive industry. Both the AVX 0612 and 0508 4-element capacitor array styles are qualified to the AEC-Q200 automotive specifications.

AEC-Q200 is the Automotive Industry qualification standard and a detailed qualification package is available on request.

All AVX automotive capacitor array production facilities are certified to ISO/TS 16949:2002.

### HOW TO ORDER

<b>W</b>	<b>3</b>	<b>A</b>	<b>4</b>	<b>Y</b>	<b>C</b>	<b>104</b>	<b>K</b>	<b>4</b>	<b>T</b>	<b>2A</b>
Style W = RoHS L = SnPb	Case Size 2 = 0508 3 = 0612	Array	Number of Caps	Voltage Z = 10V Y = 16V 3 = 25V 5 = 50V 1 = 100V	Dielectric A = NPO C = X7R F = X8R	Capacitance Code (In pF) Significant Digits + Number of Zeros e.g. 10μF=106	Capacitance Tolerance *J = ±5% *K = ±10% *M = ±20%	Failure Rate 4 = Automotive	Terminations *T = Plated Ni and Sn *Z = FLEXITERM® B = 5% min lead X = FLEXITERM® with 5% min lead	Packaging & Quantity Code 2A = 7" Reel (4000) 4A = 13" Reel (10000) 2F = 7" Reel (1000)
									*RoHS Compliant	

\*Contact factory for availability by part number for K = ±10% and J = ±5% tolerance.

### NP0/COG

SIZE	W2 = 0508				W3 = 0612			
	No. of Elements		4		Reflow/Wave			
	WVDC	16	25	50	100	16	25	50
1R0 Cap 1.0 (pF)	1.0							
1R2 Cap 1.2 (pF)	1.2							
1R5 Cap 1.5 (pF)	1.5							
1R8 Cap 1.8 (pF)	1.8							
2R2 Cap 2.2 (pF)	2.2							
2R7 Cap 2.7 (pF)	2.7							
3R3 Cap 3.3 (pF)	3.3							
3R9 Cap 3.9 (pF)	3.9							
4R7 Cap 4.7 (pF)	4.7							
5R6 Cap 5.6 (pF)	5.6							
6R8 Cap 6.8 (pF)	6.8							
8R2 Cap 8.2 (pF)	8.2							
100 Cap 10 (pF)	10							
120 Cap 12 (pF)	12							
150 Cap 15 (pF)	15							
180 Cap 18 (pF)	18							
220 Cap 22 (pF)	22							
270 Cap 27 (pF)	27							
330 Cap 33 (pF)	33							
390 Cap 39 (pF)	39							
470 Cap 47 (pF)	47							
560 Cap 56 (pF)	56							
680 Cap 68 (pF)	68							
820 Cap 82 (pF)	82							
101 Cap 100 (pF)	100							
121 Cap 120 (pF)	120							
151 Cap 150 (pF)	150							
181 Cap 180 (pF)	180							
221 Cap 220 (pF)	220							
271 Cap 270 (pF)	270							
331 Cap 330 (pF)	330							
391 Cap 390 (pF)	390							
471 Cap 470 (pF)	470							
561 Cap 560 (pF)	560							
681 Cap 680 (pF)	680							
821 Cap 820 (pF)	820							
102 Cap 1000 (pF)	1000							
122 Cap 1200 (pF)	1200							
152 Cap 1500 (pF)	1500							
182 Cap 1800 (pF)	1800							
222 Cap 2200 (pF)	2200							
272 Cap 2700 (pF)	2700							
332 Cap 3300 (pF)	3300							
392 Cap 3900 (pF)	3900							
472 Cap 4700 (pF)	4700							
562 Cap 5600 (pF)	5600							
682 Cap 6800 (pF)	6800							
822 Cap 8200 (pF)	8200							
103 Cap 0.010 (pF)	0.010							
123 Cap 0.012 (pF)	0.012							
153 Cap 0.015 (pF)	0.015							
153 Cap 0.018 (pF)	0.018							
223 Cap 0.022 (pF)	0.022							
273 Cap 0.027 (pF)	0.027							
333 Cap 0.033 (pF)	0.033							
393 Cap 0.039 (pF)	0.039							
473 Cap 0.047 (pF)	0.047							
563 Cap 0.056 (pF)	0.056							
683 Cap 0.068 (pF)	0.068							
823 Cap 0.082 (pF)	0.082							
104 Cap 0.10 (pF)	0.10							
124 Cap 0.12 (pF)	0.12							
154 Cap 0.15 (pF)	0.15							
224 Cap 0.22 (pF)	0.22							

= NP0/COG

SIZE	W2 = 0508				W2 = 0508				W3 = 0612				
	No. of Elements		2		4		4		10		16		
	WVDC	16	25	50	100	16	25	50	100	10	16	25	50
101 Cap 100 (pF)	100												
121 Cap 120 (pF)	120												
151 Cap 150 (pF)	150												
181 Cap 180 (pF)	180												
221 Cap 220 (pF)	220												
271 Cap 270 (pF)	270												
331 Cap 330 (pF)	330												
391 Cap 390 (pF)	390												
471 Cap 470 (pF)	470												
561 Cap 560 (pF)	560												
681 Cap 680 (pF)	680												
821 Cap 820 (pF)	820												
102 Cap 1000 (pF)	1000												
122 Cap 1200 (pF)	1200												
152 Cap 1500 (pF)	1500												
182 Cap 1800 (pF)	1800												
222 Cap 2200 (pF)	2200												
272 Cap 2700 (pF)	2700												
332 Cap 3300 (pF)	3300												
392 Cap 3900 (pF)	3900												
472 Cap 4700 (pF)	4700												
562 Cap 5600 (pF)	5600												
682 Cap 6800 (pF)	6800												
822 Cap 8200 (pF)	8200												

= X7R

\*Not RoHS Compliant



LEAD-FREE  
COMPATIBLE  
COMPONENT




For RoHS compliant products,  
please select correct termination style.

# Capacitor Array



## Part & Pad Layout Dimensions

### PART & PAD LAYOUT DIMENSIONS

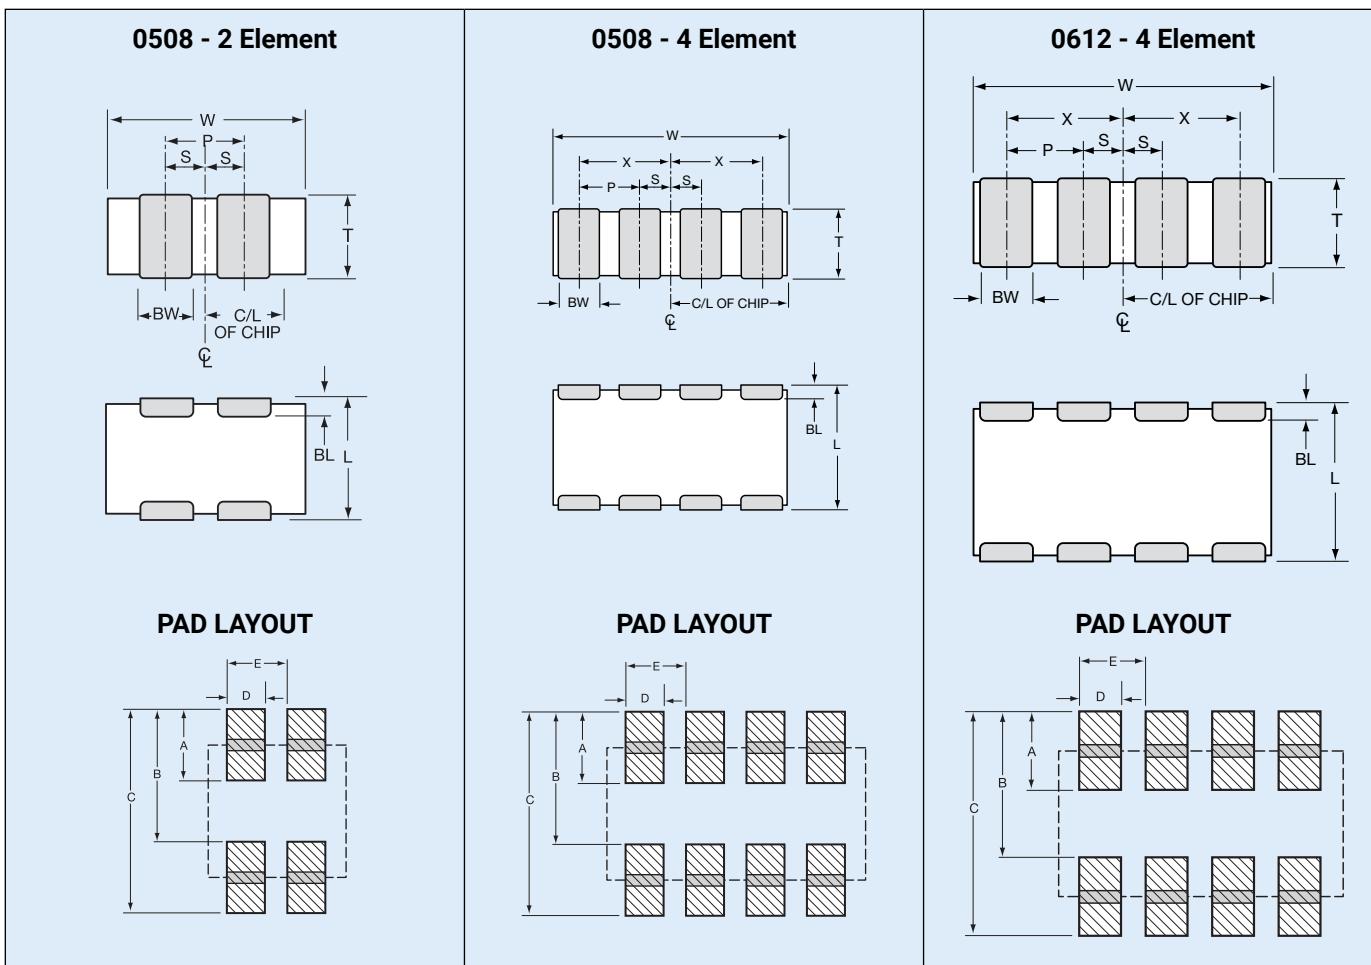

### PART DIMENSIONS

#### 0508 - 2 Element

L	W	T	BW	BL	P	S
$1.30 \pm 0.15$ ( $0.051 \pm 0.006$ )	$2.10 \pm 0.15$ ( $0.083 \pm 0.006$ )	0.94 MAX ( $0.037$ MAX)	$0.43 \pm 0.10$ ( $0.017 \pm 0.004$ )	$0.33 \pm 0.08$ ( $0.013 \pm 0.003$ )	1.00 REF (0.039 REF)	$0.50 \pm 0.10$ ( $0.020 \pm 0.004$ )

#### 0508 - 4 Element

L	W	T	BW	BL	P	X	S
$1.30 \pm 0.15$ ( $0.051 \pm 0.006$ )	$2.10 \pm 0.15$ ( $0.083 \pm 0.006$ )	0.94 MAX ( $0.037$ MAX)	$0.25 \pm 0.06$ ( $0.010 \pm 0.003$ )	$0.20 \pm 0.08$ ( $0.008 \pm 0.003$ )	0.50 REF (0.020 REF)	$0.75 \pm 0.10$ ( $0.030 \pm 0.004$ )	$0.25 \pm 0.10$ ( $0.010 \pm 0.004$ )

#### 0612 - 4 Element

L	W	T	BW	BL	P	X	S
$1.60 \pm 0.20$ ( $0.063 \pm 0.008$ )	$3.20 \pm 0.20$ ( $0.126 \pm 0.008$ )	1.35 MAX ( $0.053$ MAX)	$0.41 \pm 0.10$ ( $0.016 \pm 0.004$ )	$0.18^{+0.25}_{-0.08}$ ( $0.007^{+0.10}_{-0.03}$ )	0.76 REF (0.030 REF)	$1.14 \pm 0.10$ ( $0.045 \pm 0.004$ )	$0.38 \pm 0.10$ ( $0.015 \pm 0.004$ )

### PAD LAYOUT DIMENSIONS

#### 0508 - 2 Element

A	B	C	D	E
0.68 (0.027)	1.32 (0.052)	2.00 (0.079)	0.46 (0.018)	1.00 (0.039)

#### 0508 - 4 Element

A	B	C	D	E
0.56 (0.022)	1.32 (0.052)	1.88 (0.074)	0.30 (0.012)	0.50 (0.020)

#### 0612 - 4 Element

A	B	C	D	E
0.89 (0.035)	1.65 (0.065)	2.54 (0.100)	0.46 (0.018)	0.76 (0.030)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Capacitor Arrays & Networks category:***

***Click to view products by AVX manufacturer:***

Other Similar products are found below :

[CA064C473M4RACTU](#) [20109D1X102K5P](#) [CKCL22X5R0J105M](#) [W2L16C473MAT1S](#) [W2L16C683MAT1A](#) [C1632C103M5RACAUTO](#)  
[CA064C223K5RACTU](#) [CA064C473K4RACTU](#) [Y4C3B104K160CT](#) [CKCM25X5R1A473M](#) [CKCM25X5R0J105M](#) [20608TC750G331KP](#)  
[CA064C221M5GACTU](#) [CA064C471M3GACTU](#) [W2L16C474MAT1A](#) [CA064C100K5GACTU](#) [W2L14Z225MAT1A](#) [W2L1YC104MAT1F](#)  
[CA0508KRNPO9BN101](#) [CA0508KRNPO9BN470](#) [CA0612JRNPO9BN221](#) [CA0612KRNPO9BN151](#) [CA0612KRX7R9BB103](#)  
[CA064C103M5RACTU](#) [CA064C223K5RAC7800](#) [CA064C330K5GACTU](#) [CA064C472K5RACTU](#) [LG224Z224MAT2S1](#) [20108D1X103K5E](#)  
[W3A45C102M4T2A](#) [CA064C103K4RACTU](#) [CA064C222K5RACTU](#) [CA0612KRNPO9BN101](#) [CA0612KRX7R7BB473](#)  
[CA0612KRX7R9BB102](#) [CA064C103K5RACTU](#) [CA064C104K4RACTU](#) [C1632C223M5RAC3020](#) [CA0612JRNPO9BN470](#)  
[CA0612KRNPO9BN181](#) [CA064C101K5GACTU](#) [CA064C102K5RACTU](#) [20115D1C271K5P](#) [W3A45A151KAT2A](#)  
[CKCL22JB1H102M085AA](#) [W3A41C471KAT2A](#) [CKCL22C0G1H221K085AK](#) [CKCM25C0G2A220K060AK](#) [CKCL22CH1H151K085AA](#)  
[W3A41A470JAT2A](#)