


CEB94701 NEW

COM Express Type 7 Development Baseboard

Features

- Two 10GBASE-KR SFP+ ports
- 2 SATA-600
- VGA
- 4 USB 3.0
- 2 PCI Express Mini Card slots
- 2 RS-232/422/485

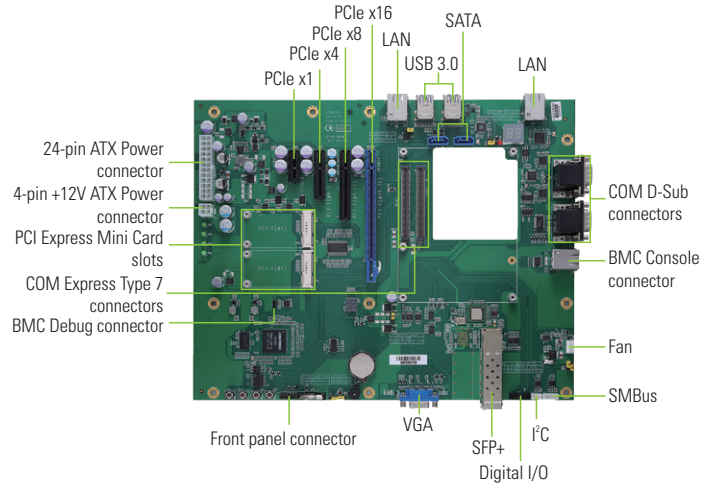

Core System

CPU	On the module
System Memory	On the module
Chipset	SoC integrated
BIOS	On the module
SSD	N/A
Watchdog Timer	On the module
Expansion Interface	2 x Full-size PCI Express Mini Card slot (one for optional) 1 x PCIe x16 1 x PCIe x8 1 x PCIe x4 1 x PCIe x1
Battery Lithium	Lithium 3V/220 mAh
Power Input	1 x 24-pin ATX connector 1 x 4-pin 12V connector (for module power supply)
Dimensions	244 x 305 mm
Board Thickness	1.6 mm
Operating Temperature	-20°C to +70°C (-4°F to +158°F)
Humidity	10% to 95% relative humidity, non-condensing

I/O

SATA	2 x SATA-600
Hardware Monitoring	Yes
Ethernet	1 x 10/100/1000 Mbps Ethernet 2 x 10GBASE-KR (SFP+)
Audio	Buzzer
USB	4 x USB 3.0/2.0
Serial	2 x RS-232/422/485 2 x TX/RX
TPM	On module
SMBus	Yes
Others	1 x iFC
GPIO	4-CH in & 4-CH out
Display	1 x VGA

Packing List

Quick installation guide; user's manual/utility CD

Ordering Information

Standard	
CEB94701 (P/N: E394701100)	COM Express Type 7 development board with two 10GBASE-KR Ethernet ports
Compliant Modules	
CEM700-D1577	COM Express Type 7 basic module with Intel® Xeon® D-1577, 10GBASE-KR, USB 3.0 and TPM
CEM700-D1539	COM Express Type 7 basic module with Intel® Xeon® D-1539, 10GBASE-KR, USB 3.0 and TPM
CEM700-D1548	COM Express Type 7 basic module with Intel® Xeon® D-1548, 10GBASE-KR, USB 3.0 and TPM
CEM700-D1527	COM Express Type 7 basic module with Intel® Xeon® D-1527, 10GBASE-KR, USB 3.0 and TPM
CEM700-D1519	COM Express Type 7 basic module with Intel® Pentium® D-1519, 10GBASE-KR, USB 3.0 and TPM
CEM700-D1508	COM Express Type 7 basic module with Intel® Xeon® D-1508, 10GBASE-KR, USB 3.0 and TPM



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - x86 category](#):

Click to view products by [Axiomtek manufacturer](#):

Other Similar products are found below :

[conga-MEVAL](#) [iQ7-DB-MATX-R10](#) [IT6/COMe Carrier](#) [DFR0453](#) [ETX-Proto](#) [Express-BASE6](#) [Q7-BASE-R01](#) [Starterkit-CFE-E-2176M-3DIMM/M48G](#) [Starterkit-COM Express 6](#) [Starterkit-COM Express 6 PLUS](#) [VIZI-AI LEC-AL-E3940-AI-4G-32G/EMEA](#) [VPX-R300](#) [AKX00002](#) [AKX00002SL](#) [CEB94701](#) [7000-54864-102-101](#) [ARDUINO2.AL.B](#) [ARDUINO.AL.B](#) [GT.PDKW](#) [IOTGTWY.DK110](#) [IOTGTWY.DK200](#) [IOTGTWY.DK300](#) [IOTGTWY.DK50](#) [MIKROE-2582](#) [102010028](#) [110060064](#) [110060382](#) [110060577](#) [SOM-DB5800-00A2E](#) [ROM-DB7500-SCA1E](#) [conga-QEVAL/Qseven 2.0](#) [conga-QKIT](#) [X7EVAL/ind](#) [68300-0000-00-0](#) [MIKROE-2546](#) [DEV-13033](#)