


DC / AC INVERTER IPS-1200S

12VDC / 230VAC 1200W PURE SINE WAVE



Input voltage:	11÷15VDC
Output voltage :	230VAC
Maximum Power:	1200VA
Continuous Power:	600VA
Output voltage type:	PURE SINE WAVE
Overload protection :	YES
Short-current protection:	YES
Thermal protection:	YES
Soft START:	YES
Input overvoltage protection :	15VDC
Battery discharge warning:	YES
Operating temperature range:	0 ~ +40 °C
Efficiency:	> 92 %
Cooling type:	Active
Connectors:	Screw Connector M6
Output socket type:	French x 1
Housing type:	Aluminium
IP protection:	IP21
Dimensions LxBxH [mm]:	260x157x77
Weight:	2.2
Product code:	5905279203815

Technical details

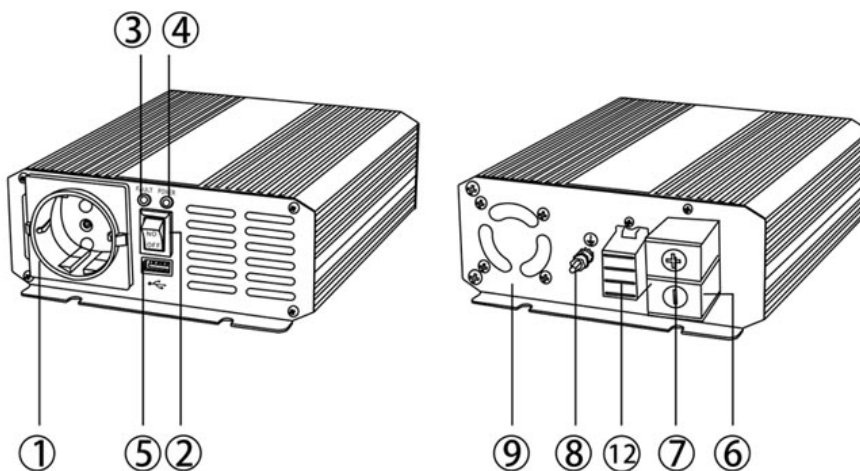

- 1 - 230V output socket
- 2 - Main switch
- 3 - LED indicator (Fault)
- 4 - LED indicator (Power)
- 5 - USB charging port

- 6 - Input voltage socket 12V (-)
- 7 - Input voltage socket 12V (+)
- 8 - Ground pin
- 9 - Fan
- 12 - Fuse

www.powerinverters.pl

Updated 17-02-2021



PROGRAM REGIONALNY
 NARODOWA STRATEGIA SPÓJNOŚCI



Projekt współfinansowany przez Unię Europejską z Europejskiego Funduszu Rozwoju Regionalnego oraz z budżetu państwa.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Azo Digital](#) manufacturer:

Other Similar products are found below :

[BC-20 PRO 20A 12V](#) [IPS-1000S 12V/230V ECO MODE](#) [IPS-1200S 12V/230V](#) [IPS-2000S 12V/230V](#) [IPS-400 12VDC-230VAC 400W](#) [IPS-400 24VDC-230VAC 400W](#) [IPS-5000S 24V/230V ECO MODE](#) [IPS-800U 12V/230V](#) [IPS-900 24V/230V](#) [MPPT 20A 12V/24V LCD](#) [MPPT 30A 12V/24V LCD](#) [PE-16](#) [PE-25](#) [PE-35](#) [PE-45](#) [PS-250](#) [PU-1000](#) [PU-250](#) [PU-250-12-48](#) [PU-300](#) [PU-500](#) [RV-16](#) [SOL-20S](#)