
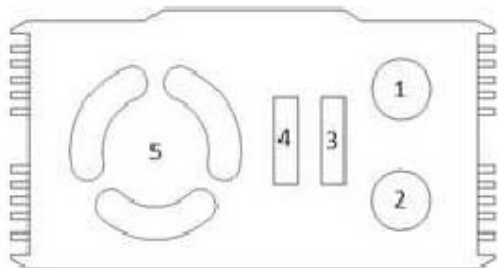


# VOLTAGE INVERTER IPS-800 DUO


## 12VDC / 24VDC - 230VAC 800W

	<p>Input voltage: 11÷15 / 22÷30VDC          Output voltage: 230VAC          Surge power: 800VA          Rated power: 400VA          Output wave form: Modified sine wave          Motor soft start: NO          Overload protection: YES          Shortcut protection: YES          Thermal protection: YES          Overvoltage protection: 15VDC / 30VDC          Low voltage alarm: YES          Operating temperature: 0 ~ +40°C          Efficiency: &gt; 85%          Cooling: Active          Terminals: M4 terminal          230V socket: 1 pcs          Case: Aluminium          Protection: IP21          Dimensions [mm]: 154x112x58          Weight [kg]: 0.73 kg          Product code: 5903332566655</p>	
---	--	--

### Inverter description



- 1 - input +12V or +24V
- 2 - input GND
- 3 - fuse (30A)
- 4 - fuse (30A)
- 5 - fan

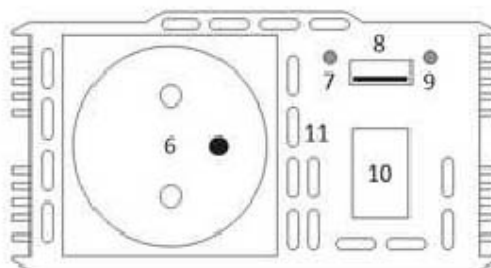

- 6 - 230V socket
- 7 - indicator (fault)
- 8 - USB charging port
- 9 - indicator (power on)
- 10 - main switch

[www.polskieprzetwornice.pl](http://www.polskieprzetwornice.pl)



**PROGRAM REGIONALNY**  
 NARODOWA STRATEGIA SPÓJNOŚCI



Projekt współfinansowany przez Unię Europejską z Europejskiego Funduszu Rozwoju Regionalnego oraz z budżetu państwa.



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Azo Digital](#) manufacturer:*

Other Similar products are found below :

[BC-20 PRO 20A 12V](#) [IPS-1000S 12V/230V ECO MODE](#) [IPS-1200S 12V/230V](#) [IPS-2000S 12V/230V](#) [IPS-400 12VDC-230VAC 400W](#) [IPS-400 24VDC-230VAC 400W](#) [IPS-5000S 24V/230V ECO MODE](#) [IPS-800U 12V/230V](#) [IPS-900 24V/230V](#) [MPPT 20A 12V/24V LCD](#) [MPPT 30A 12V/24V LCD](#) [PE-16](#) [PE-25](#) [PE-35](#) [PE-45](#) [PS-250](#) [PU-1000](#) [PU-250](#) [PU-250-12-48](#) [PU-300](#) [PU-500](#) [RV-16](#) [SOL-20S](#)