

BB-232CAM

BB-232CAM3

RS-232 Modem Cable

DB9 Female to DB25 Male



Features

- Converts 25-pin serial to 9-pin AT serial
- Fully molded back shell with strain relief for added protection
- 26 AWG stranded conductors for flexibility
- 9-wire, all pins terminated
- PC-AT modem cable

Introduction

Make easy connections between your serial equipment with this reliable, quality built, D-subminiature serial modem cable.

Signal Pinouts

DB9 Female	DB9 Male
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	6


Ordering Information

Model No.	Connector 1	Connector 2	Length	Color
BB-232CAM	DB9 Female	DB25 Male	1.8m (6 ft)	Beige
BB-232CAM3	DB9 Female	DB25 Male	0.9m (3 ft)	Beige

Modem Cable - Straight Conversion DB9 to DB25

RS-232 Signal Names		Pin#	Connections	Pin#	
Carrier Detector (DCD)	CD	#1		#1	FGND
Receive Data (Rx)	RD	#2		#2	TD
Transmit Data (Tx)	TD	#3		#3	RD
Data Terminal Ready	DTR	#4		#4	RTS
Signal Ground/Common (SG)	GND	#5		#5	CTS
Data Set Ready	DSR	#6		#6	DSR
Request to Send	RTS	#7		#7	GND
Clear to Send	CTS	#8		#8	CD
Ring Indicator	RI	#9		#20	DTR
Soldered to DB9 Metal - Shield	FGND		#22	RI	

Product Drawing

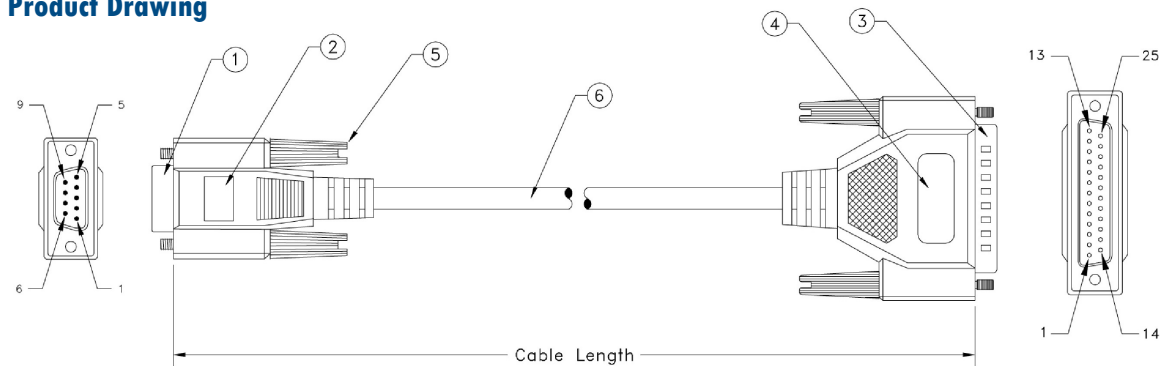

- ① D-subminiature 9-pin female with gold plating contacts
- ② Beige-color molded PVC hood, fully shielded with aluminum foil
- ③ D-subminiature 25-pin male with gold plating contacts
- ④ Beige-color molded PVC hood, fully shielded with aluminum foil
- ⑤ 4/40 molded thumbscrew, beige-color
- ⑥ 28 AWG, 9 conductors + drain wire, single-shielded with aluminum foil, beige-color outer PVC jacket

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Cables](#) category:

Click to view products by [B+B SmartWorx](#) manufacturer:

Other Similar products are found below :

[1200980218](#) [1200980067](#) [RB09P09P-006](#) [RB09P09P-012](#) [RB15P15P-006](#) [RB25P25P-006](#) [RB37P37P-024](#) [172-0906](#) [SHD15P15S-012](#)
[SHD15P15S-036](#) [177-710-1-9S6K7-24MNN](#) [ACL-10137-2MM](#) [RB09P09P-024](#) [319285-3](#) [RS422-OM2](#) [SHD26P26S-060](#) [SHD44P44S-036](#)
[73-6210MM-6](#) [C200H-CN320-EU](#) [49725A 060S2](#) [73231-1321](#) [SDB-50AFFM-SL7A02](#) [49760A 060S2](#) [HDB-26AFFM-SL7A02](#) [30-9503P](#)
[30-9522P](#) [73-6220MM-6](#) [1200980058](#) [1200980066](#) [1200980078](#) [1200980052](#) [1200980093](#) [1200980028](#) [1200980021](#) [1200980127](#) [SDB-](#)
[09AFFM-SL7A02](#) [BB-LDVYCBL](#) [83421-9286](#) [MLDM2L-21P-6K7-18B](#) [KSFD1](#) [MM-2J2-021-SS1-41WN](#) [HDB-78AMMM-SL7A05](#) [SDB-](#)
[37AMMM-SL7A03](#) [SDB-15AFFM-SL7A05](#) [ACC-500-163-R](#) [172-1910](#) [VS-25-DSUB-20-LI-2,0](#) [VS-25-DSUB-20-LI-5,0](#) [30-9506MF](#)
[MLDM2L-25P-6K7-18B](#)