

5VDC, 3A, 15W Switching Power Supply

Models BB-PS-WDS, BB-PS-SDS Kit

ADVANTECH

www.advantech.com



Model BB-PS-WDS



Model BB-PS-SDS
Includes NA/USA Power Cord


FEATURES

- 5VDC Output
- 120 - 240 VAC Input
- 10W Power
- 2.1mm Barrel Plug
- Wall Mount
- Kit option #BB-PS-SDS includes NA/USA power cord

ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION	INCLUDES
BB-PS-WDS	5VDC, 3A, 15W Barrel Plug Power Supply	Power Supply only, (specify required power cord when ordering)
BB-PS-SDS	5VDC, 3A, 15W Barrel Plug Power Supply Kit	Power Supply with US power cord included.

MECHANICAL DRAWING - MODEL BB-PS-WDS

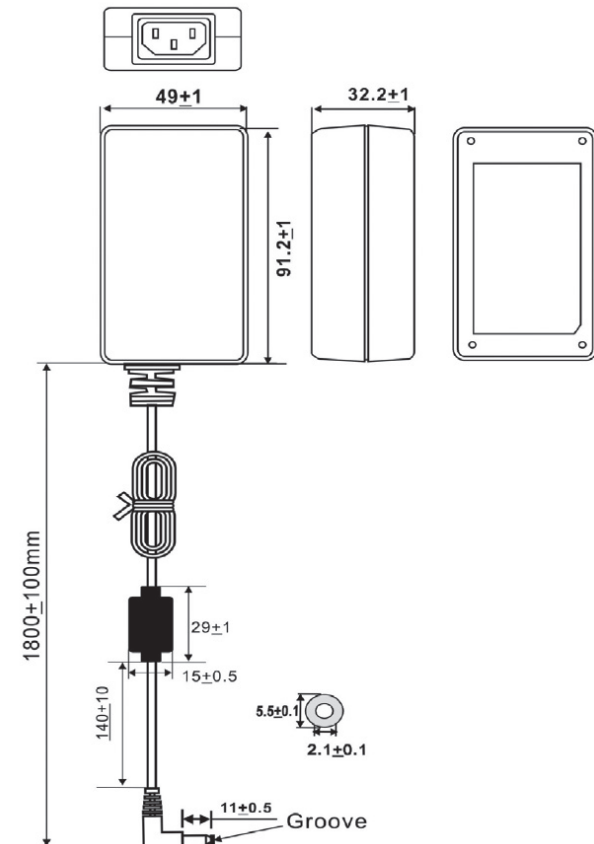

SPECIFICATIONS - MODEL BB-PS-WDS

POWER - INPUT	
Input Voltage	100 ~ 240VAC
Input Frequency	-50/60Hz +/- 3Hz
Efficiency	60%, minimum, full load
In-rush Current	70A, maximum (Vin 120VAC)
POWER - OUTPUT	
Output Power	15W
Output Current	2A
Output Voltage	5 (+0.5/-0) V, no load 5VDC +/-0.3V, full load (2.0A)
Line Regulation	5%, maximum
Hold-up Time	8mS, maximum (Vin 120VAC/60Hz)
Rise Time	3000mS, maximum (Vin 100VAC/60Hz)
PROTECTION	
Over-Current Input	Input power Off by fuse (fuse rating 1A/250VAC)
Over-Load Output	No odor, smoke, fire, plastic deformation and excessive heat happen.
Short Circuit Output	No odor, smoke, fire, plastic deformation and excessive heat happen.
ENVIRONMENTAL	
Operating Temperature	0 to +40 °C
Storage Temperature	-20 to +60 °C
Operating Humidity	5 to 95%
Storage Humidity	20 to 90%
MECHANICAL	
Dimensions	91.2W x 49.0D x 32.2H mm
AC Inlet	Desktop, 3-pin
Weight, per unit	Net = 0.230 Kg (no packaging) Gross = 0.240 Kg (with packaging)
Case Material	PC, PC+ABS or equivalent (94V-1)
Mounting	Wall mount
Barrel Plug	2.1 mm
SAFETY	
Isolation Voltage	Input to output at 10 mA for 1 minute
Isolation Resistance	Input to output at 500V DC
APPROVALS / DIRECTIVES / STANDARDS	
Safety Standard	UL/cUL, GS, CSA, CB, CE, PSE, CCC, VS, SAA, RoHS
EMI/EMC	EN55022, FCC Class B, C-Tick, VCCI, BSMI
EMS	ESD, IEC61000-4-2 Level 2 Surge, IEC61000-4-5 Level 3

All product specifications are subject to change without notice.
PS-WDS_PS-SDS_4119ds

ADVANTECH

Advantech B+B SmartWorx, 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 1 (800)346-3119/Toll Free | orders@advantech-bb.com | support@advantech-bb.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desktop AC Adapters](#) category:

Click to view products by [B+B SmartWorx](#) manufacturer:

Other Similar products are found below :

[212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [432703037451](#) [KR8-PS01](#) [1894875](#) [FWE050024B-10A](#) [820A4080G](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#) [TRH21A120-49E03-Level-VI](#) [FWC100024A-11A](#) [FWE050012B-10A](#) [AC-DC ADAPTER 90W w/ Cable](#) [FWA065024A-11A](#) [PSA120U-560L6](#) [96PSA-A63W18V1-M](#) [1895235](#) [PW-C0725-W2-B](#) [57-U1](#) [57-U2](#) [CENB1040A1245F02](#) [SED80N2-16.0](#) [SED80N3-16.0](#) [RFQ43442-01](#) [YS50-1903150](#) [PCM50UT04](#) [PCM50UT05](#) [Adapter 24V230W FSP230-AAAN3 WIRE FSP](#) [TRH100A240-11E12 VI](#) [TR70MB360-01E03 VI](#) [TRH50A240-11E01 VI](#) [TRE36A120-01G03 VI](#) [TRH100A180-11E12 VI](#) [AMA65DR4-120054Y](#) [AMA90DR4-240037Y](#) [AMA90DR5-120075Y](#) [AMA24DR4-120150Y](#) [AMA24DR5-120150Y](#) [AMA36DR4-120250Y](#) [TRE36A050-11G02 VI](#) [TRE36A090-11G03 VI](#) [TRE36A120-11G03 VI](#) [TRE36A135-11G03 VI](#) [TRE36A150-11G03 VI](#) [TRE36A180-11G03 VI](#) [TRE36A240-11G03 VI](#)