

# Type 0AAL

## High DC Voltage Fuse Series

0AAL Series

RoHS Compliant

### Description

The 0AAL fuse is designed for EV or HEV application.

### Features



- 500Vdc ideal for EV or HEV application
- Excellent DC performance
- Full compliance with EU Directive 2011/65/EU and amending directive 2015/863
- Stud mount

### Applications

EV or HEV application



### Physical Specifications

Materials	Body : Ceramic
	Cap : Tin Plated Brass Caps
	Terminals : Tin plated Copper
Marking	On Fuse :
	"bel"
	"0AAL", "Current Rating", "Voltage Rating", "Interrupting Rating"
	On Label :
	"bel", "0AALx", "Current Rating", "Voltage Rating", "Interrupting Rating", and "  ", "  "(China RoHS compliant).

### Electrical Characteristics

Testing Current	Operating	
	Minimum	Maximum
100%	4 Hrs.	N/A
200%	1 Sec	300 Sec
300%	0.2 Sec	30 Sec
500%	0.1 Sec	10 Sec

### Safety Agency Approvals


Ampere Rating / Voltage Rating	Ampere Range / Volt @ I.R. ability*
200A-400A / 500V DC	200A-400A/ 500V @ 20kA DC
*I.R.= Interrupting Rating = Short Circuit Rating(Amps)	

## Electrical Specifications


Part Number	Ampere Rating	Voltage and Interrupting Ratings	Power Loss @1.0In (W)
0AALAK200-XX	200A	See Table of Ratings on Page 1 for Voltage and associated Interrupting Ratings	<36
0AALBK200-XX			
0AALAK250-XX	250A		<41
0AALBK250-XX			
0AALAK300-XX	300A		<45
0AALBK300-XX			
0AALAK350-XX	350A		<50
0AALBK350-XX			
0AALAK400-XX	400A		<53
0AALBK400-XX			

Consult manufacturer for other ratings

## Temperature Re-Rating Curve

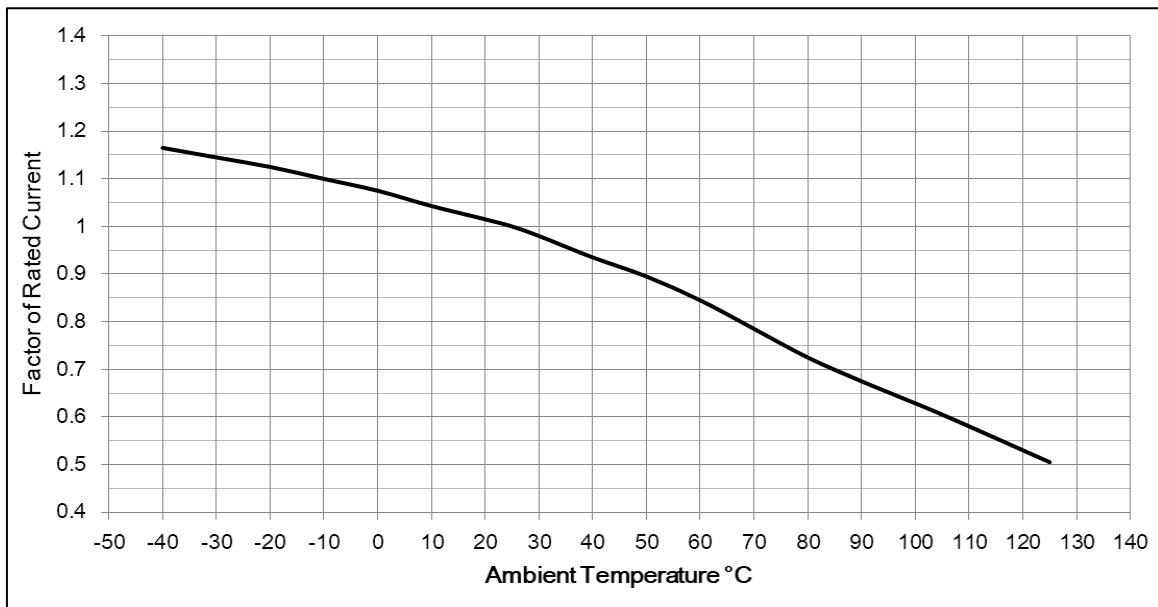

## Average Time Current Curve

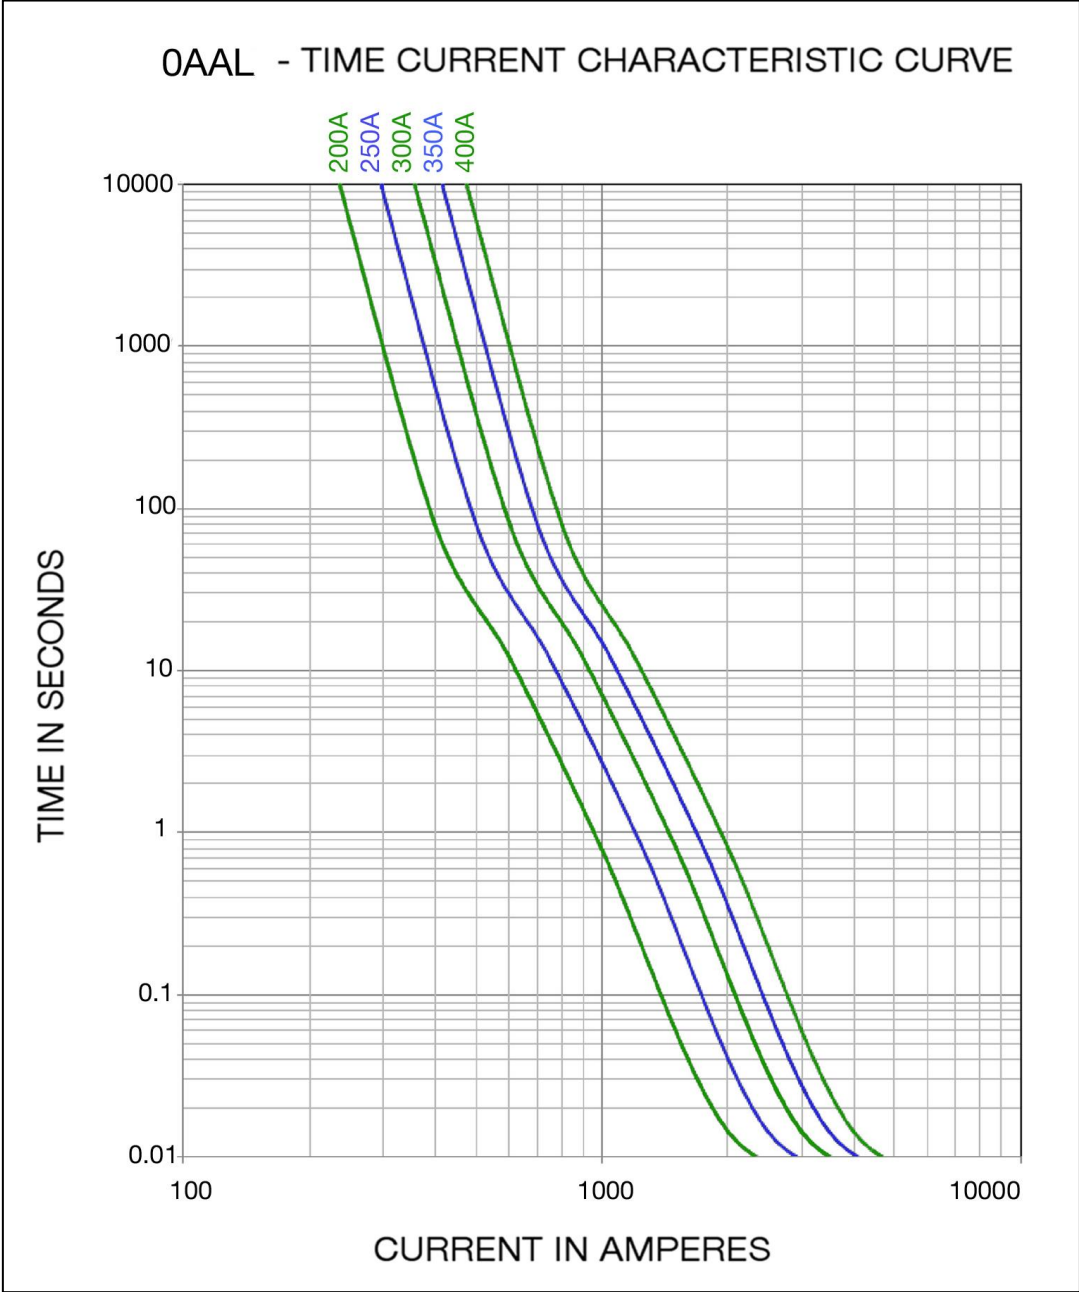

Specifications subject to change without notice

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)

© 2020 Bel Fuse, Inc.

Rev. 0AAL Aug2020


## Fuse FGNO Explanation

0AAL X [XXXX] - XX


0AALA/B=0AALA/B; [XXXX]=Ampere Rating; XX=See Ordering Information as below

Amps	Bel FGNO[XXXX]
200	K200
250	K250
300	K300
350	K350
400	K400

## Mechanical Dimensions

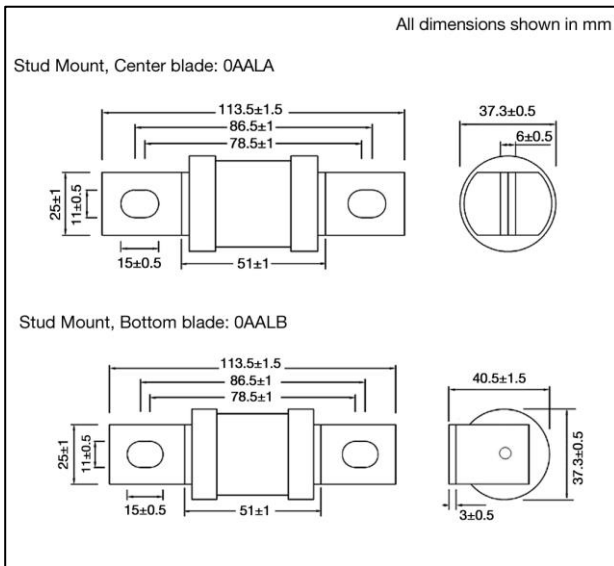

## Ordering Information

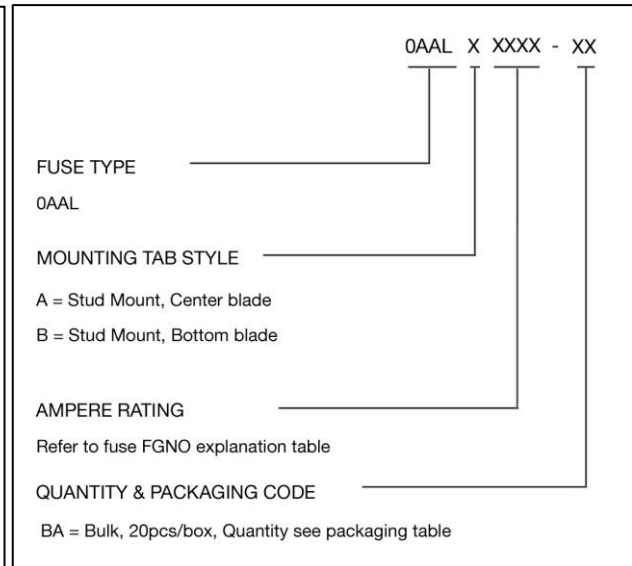

## Packaging

Packaging Option	Quantity	Packaging Code
Bulk (Center and bottom blade mounting)	20pcs/box	BA

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Specialty Fuses](#) category:*

*Click to view products by [Bel Fuse](#) manufacturer:*

Other Similar products are found below :

[63NZ02GL](#) [714125](#) [722134](#) [F02A-4AS](#) [F02B-1A](#) [80NH00GR-6](#) [FWH-200A](#) [FWP-32A14F](#) [12LCT](#) [12TDLSJ63](#) [REN-3](#) [15.5CAVH2E](#)  
[ECF-1](#) [ECF-2](#) [ECF-3](#) [ECF-4](#) [170M0213](#) [170M1369-D](#) [170M3809D](#) [BK/F02B-1A](#) [N-2-1/2](#) [N-3-2/10](#) [NITD2](#) [20D16](#) [KAA-3](#) [KAB-30](#)  
[KAW-3](#) [2D16](#) [LKN-125B](#) [16FC](#) [170M1564D](#) [170M2616](#) [170M2668](#) [170M4161](#) [170M4241](#) [170M4699](#) [ESD63](#) [ABS-30](#) [ABS-8](#) [ACF-15](#)  
[ACF-30](#) [ACO-30](#) [F02A-10A](#) [SSD10](#) [200NH1M](#) [FWP-25A14FI](#) [FWP-40A14FI](#) [FWP-500A](#) [FWP-63A22FI](#) [FWP-80A22FI](#)