

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQ, RANGE: DC TO 18.0 GHz

1.2 ATTENUATION VALUES AND ACCURACY

0 dB:	+0.3/-0dB
0.5 TO 10 dB:	±0.3 dB
10.5 TO 20 dB:	±0.5 dB
20.5 TO 40 dB:	±1.0 dB
41 TO 60 dB:	±1.5 dB


1.3 MAXIMUM VSWR: 1.07 + .015f (GHz)

1.4 MAXIMUM INPUT POWER:

2 WATTS AVERAGE AT +25°C DERATED LINEARLY  
TO 0.5 WATTS AT +125°C

1.5 OPERATING TEMPERATURE RANGE: -65°C TO +125°C

2.0 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

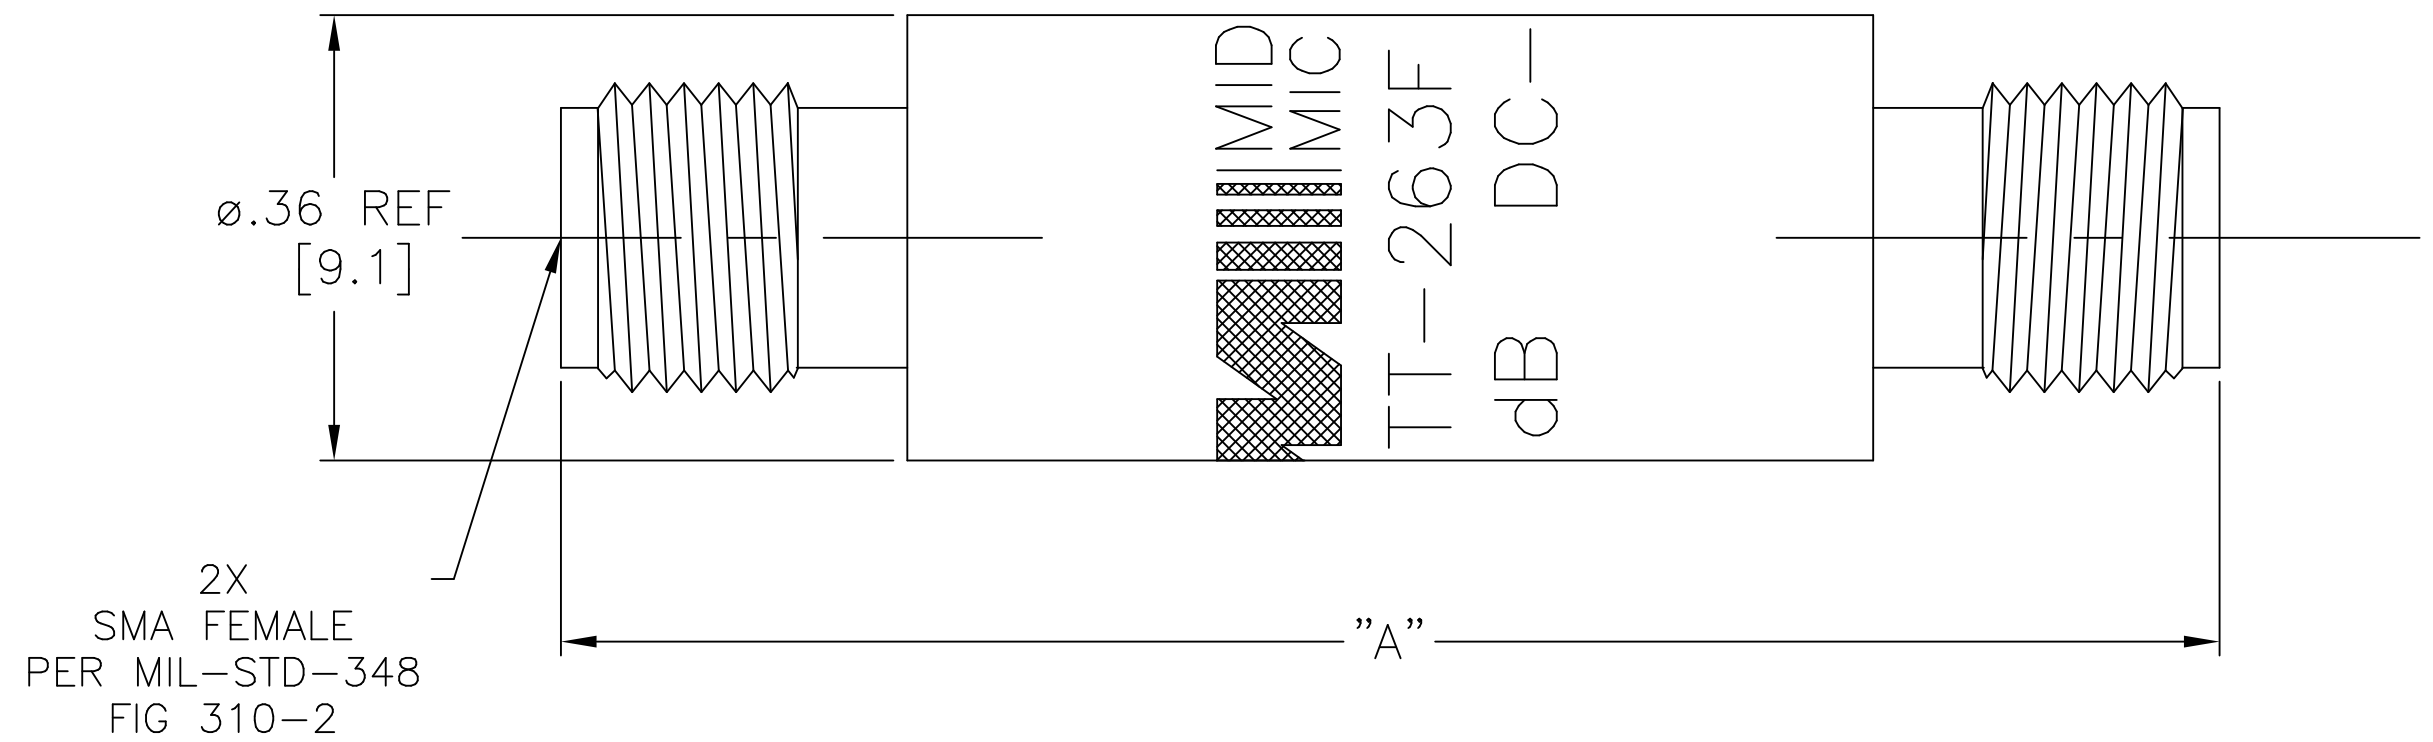

ATTENUATION VALUE	"A"
0 TO 30 dB	1.07 [27.2]
31 TO 60 dB	1.18 [30.0]

REV.	DESCRIPTION	DATE
-	RELEASED	2/23/79
A	ECR 4805	9/8/86
B	ECR 6545	6/29/89
C	REDRAW ON CAD	8/28/92
D	ECN 20115	10/5/04
E	ECO 23852	10/11/11

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.		CAGE CODE <b>34078</b>		<b>MIDWEST MICROWAVE</b>	
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY: ±1°		<b>EMERSON</b> Network Power Connectivity Solutions		TITLE MINIATURE ATTENUATOR 0 - 60 dB OUTLINE DRAWING	
DRAWN/DATE A.BEATTY 8/28/92		ENG./DATE G.KOZAK 8/28/92		DRAWING NUMBER ATT-263F-XX-SMA-02-01	
CHECKED/DATE M.CASURA 10/11/11		APPROVED/DATE J. KEREKES 10/11/11		REV. E	
SCALE: NTS				SHEET 1 of 1	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Attenuators - Interconnects](#) category:*

*Click to view products by [Bel Fuse](#) manufacturer:*

Other Similar products are found below :

[R411803119](#) [R413806115](#) [R413808000](#) [R413810115](#) [R413850115](#) [R414510000](#) [R414701000](#) [BNC-13](#) [R411800121](#) [R411801121](#)  
[R412412124](#) [R412450000](#) [R413800000](#) [R413805000](#) [R413830000](#) [R413840115](#) [R414730000](#) [R415420000](#) [R415703000](#) [R416010000](#)  
[R420003110](#) [R411801000](#) [R411815121](#) [R413305000](#) [R413801000](#) [R414520000](#) [R411808121](#) [R412500124](#) [R412414124](#) [R412501124](#)  
[HMC-C584](#) [R413802000](#) [R412400124](#) [R411700124](#) [R417310130](#) [R411801119](#) [R412419124](#) [R411703124](#) [R412401124](#) [R443131000](#)  
[R417130110](#) [R414700000](#) [R414505000](#) [R411802119](#) [R417720128](#) [R420706110](#) [R413811000](#) [R413803115](#) [R414501000](#) [R417903128](#)