

NOTES:

1.0 SPECIFICATIONS:

1.1 FREQ. RANGE: DC TO 18.0 GHz

1.2 ATTENUATION ACCURACY:


- 0dB: +0.3/-0dB
- 0.5-10dB: ±0.3dB
- 10.5-20dB: ±0.5dB
- 20.5-40dB: ±1.0dB
- 41-60dB: ±1.5dB

1.3 MAXIMUM VSWR: 1.07 + .015 f (GHz)

1.4 MAXIMUM INPUT POWER: 2 WATTS AVG  
AT +25°C DERATED LINEARLY TO  
0.5 WATTS AT +125°C

1.5 OPERATING TEMP. RANGE: -65°C to +125°C

2.0 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

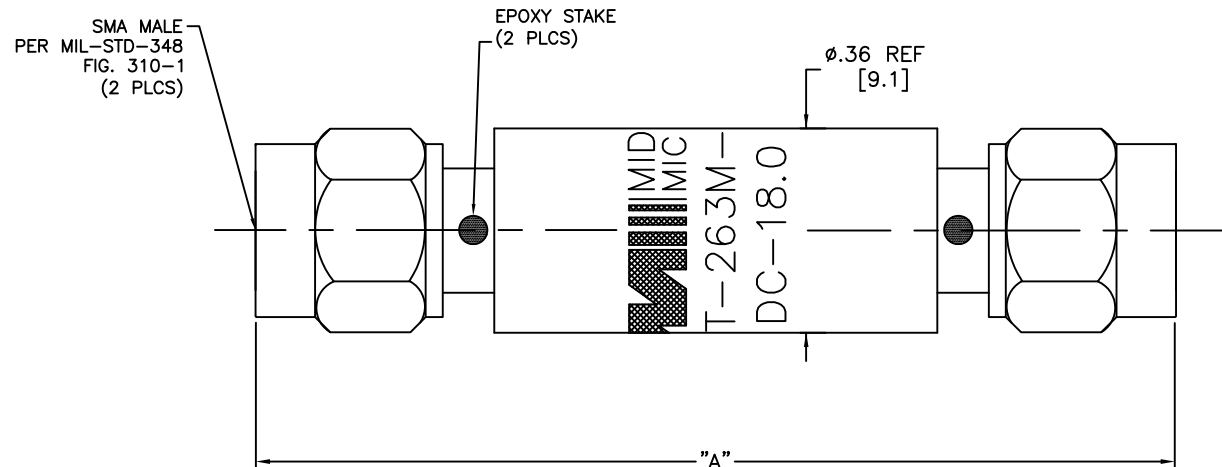

31 to 60 dB	1.44 [36.6]
0 to 30 dB	1.33 [33.8]
-XX- ATTENUATION VALUE	"A"

REV.	DESCRIPTION	DATE
-	RELEASED	11/13/90
A	ECR 6545	6/29/98
B	ECR 6933	11/9/90
B1	UPDATE MOD NO	8/29/92
C	ECN 20115	10/5/04
D	ECO 24015	12/20/11

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.</p> <p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.003 2 PLACE DECIMALS ±.01 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY: ±2°</p>	<p>DATE CODE <b>34078</b></p>	<p>TITLE <b>MIDWEST MICROWAVE</b></p>		
	<p><b>EMERSON</b> Network Power Connectivity Solutions</p>		<p>TITLE ATTENUATOR 0 TO 60 dB OUTLINE DRAWING</p>	
	<p>DESIGNED BY D.ESL 11/13/90</p>	<p>DATE 2/19/91</p>	<p>DESIGNED BY A.BEAUTY 2/15/91</p>	<p>DATE 2/19/91</p>
	<p>DRAWING NUMBER ATT-263M-XX-SMA-02-01</p>		<p>REV. D</p>	<p>SCALE: 6:1</p>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Attenuators - Interconnects](#) category:*

*Click to view products by [Bel Fuse](#) manufacturer:*

Other Similar products are found below :

[R411803119](#) [R413806115](#) [R413808000](#) [R413810115](#) [R413850115](#) [R414510000](#) [R414701000](#) [BNC-13](#) [R411800121](#) [R411801121](#)  
[R412412124](#) [R412450000](#) [R413800000](#) [R413805000](#) [R413830000](#) [R413840115](#) [R414730000](#) [R415420000](#) [R415703000](#) [R416010000](#)  
[R420003110](#) [R411801000](#) [R411815121](#) [R413305000](#) [R413801000](#) [R414520000](#) [R411808121](#) [R412500124](#) [R412414124](#) [R412501124](#)  
[HMC-C584](#) [R413802000](#) [R412400124](#) [R411700124](#) [R417310130](#) [R411801119](#) [R412419124](#) [R411703124](#) [R412401124](#) [R443131000](#)  
[R417130110](#) [R414700000](#) [R414505000](#) [R411802119](#) [R417720128](#) [R420706110](#) [R413811000](#) [R413803115](#) [R414501000](#) [R417903128](#)