

MODEL NUMBER
DCB-3510-FF-SMA-02


REV.
D1

- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: 250 MHz to 18.5 GHz
 - 1.2 IMPEDANCE: 50 OHMS, NOM.
 - 1.3 VSWR: 1.35:1 MAX.
 - 1.4 INSERTION LOSS: 0.5dB MAX.
 - 1.5 INSERTION LOSS AT 1 KHz: > 60dB
 - 1.6 DC WORKING VOLTAGE: 200 VOLTS, MIN.
 - 1.7 OPERATING TEMPERATURE: -65°C to +125°C
 - 1.8 TYPE: INNER ONLY

2.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-04702-27-03)

3.0 DIMENSIONS IN PARENTHESIS ARE IN
MILLIMETERS.

SMA FEMALE CONN.
PER MIL-PRF-39012

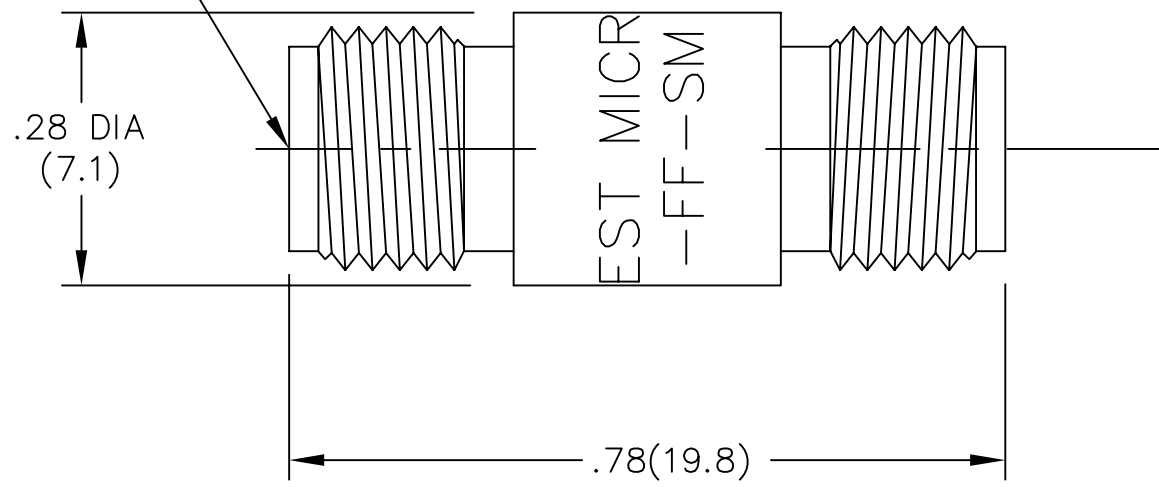

DWG NO. WAS: 03973-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	3/5/82
A	ECR 2201	5/23/83
B	ECR 6545	7/10/89
C	ECN 12424	2/11/93
D	ECN 12489	3/16/93
D1	ADDED TITLEBLOCK	5/25/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY:	FSCM NO. 34078	MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	TITLE DC BLOCK	
	DRAWN/DATE A.BEATTY 2/12/93	ENG./DATE G.KOZAK 2/18/93	DRAWING NUMBER DCB-3510-FF-SMA-02
	CHECKED/DATE M.HOLLMAN 2/17/93	APPROVED/DATE	SCALE: 5=1 SHEET 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - In Series](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[5916-1103-603](#) [5919-1503-000](#) [5919-9503-000](#) [651A505](#) [82-5552](#) [9030-9523-502](#) [PN2C](#) [A0407000](#) [R114703000W](#) [R125771001](#)
[R127871001](#) [R141710000W](#) [R141723161](#) [R141730000](#) [R143730700](#) [R143770000](#) [R161703000W](#) [R161753000W](#) [R161791530W](#)
[R201705000](#) [R222705200](#) [R222M40010W](#) [R223703180](#) [R316754000](#) [R405006000](#) [R443162000](#) [AD78TL](#) [HRM-513S](#) [1996352-2](#)
[2157155-1](#) [252169-75](#) [AD158](#) [2101130-1](#) [252186](#) [R114704000W](#) [R114720000W](#) [R125705001](#) [R125705701](#) [R125771000](#) [R125771001W](#)
[R127704001](#) [R127.870.001](#) [R127872001](#) [R141717000](#) [R142710000](#) [R142723000](#) [R143703000](#) [R143704000](#) [R143705700](#) [R143710000](#)