

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: 0.5 to 18.0 GHz
- 1.2 IMPEDANCE: 50 OHMS, NOM.
- 1.3 VSWR: 1.35:1 MAX.
- 1.4 INSERTION LOSS: 0.5dB MAX.
- 1.5 DC WORKING VOLTAGE: 200 VOLTS, MIN.
- 1.6 OPERATING TEMPERATURE: -20°C to +100°C
- 1.7 TYPE: INNER/OUTER

2.0 MARKING:

MARK UNIT AS SHOWN.

3.0 EPOXY SEAL USING LOCTITE 425.

SMA FEMALE CONN.
PER MIL-PRF-39012

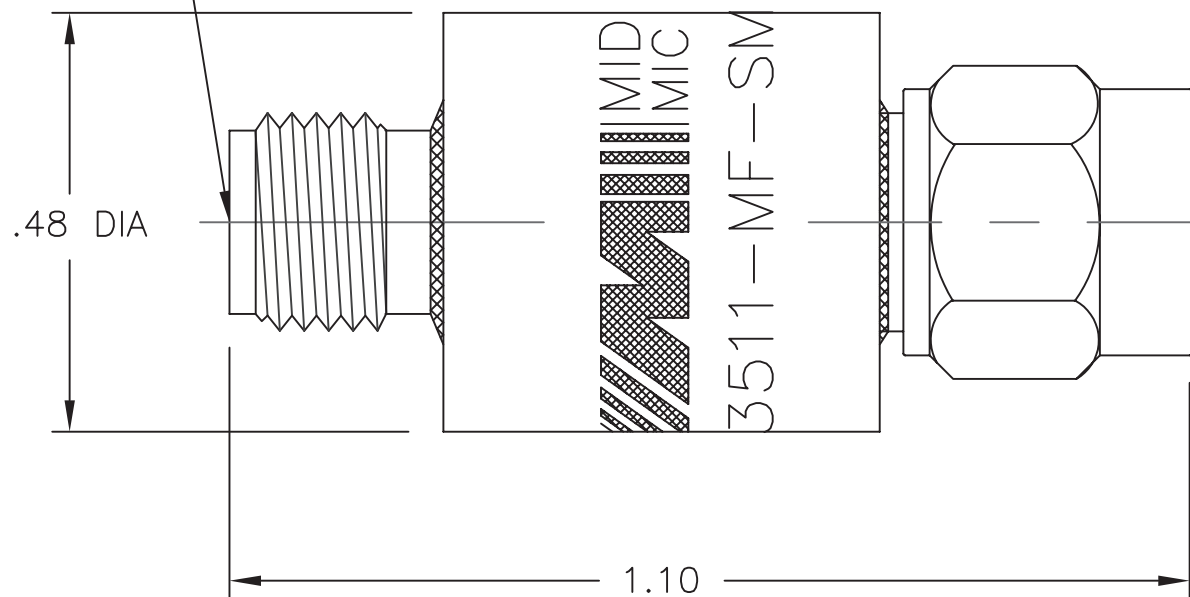

SMA MALE CONN.
PER MIL-PRF-39012

REV.	DESCRIPTION	DATE
-	RELEASED	9/4/92
-1	ADDED TITLEBLOCK	5/26/05
A	ECN 20639	12/21/05
D	ECO 23232	1/24/11

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions.</p> <p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°</p>	<p>CAGE CODE 34078</p>	<p>MIDWEST MICROWAVE</p>	
			<p>TITLE DC BLOCK OUTLINE DRAWING</p>
<p>DRAWN/DATE M.HOLLMAN 9/1/92</p>	<p>ENG./DATE G.KOZAK 9/3/92</p>	<p>DRAWING NUMBER DCB-3511-MF-SMA-02-01</p>	<p>REV. D</p>
<p>CHECKED/DATE A.BEATTY</p>	<p>APPROVED/DATE</p>	<p>SCALE: 5=1</p>	<p>SHEET 1 of 1</p>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [980-8666-005](#) [1200690078](#) [1-201144-1](#) [R107003010W](#) [R110A172100](#)