


# 364 Series

## Dual BNC Right-Angle Jack PCB Connectors

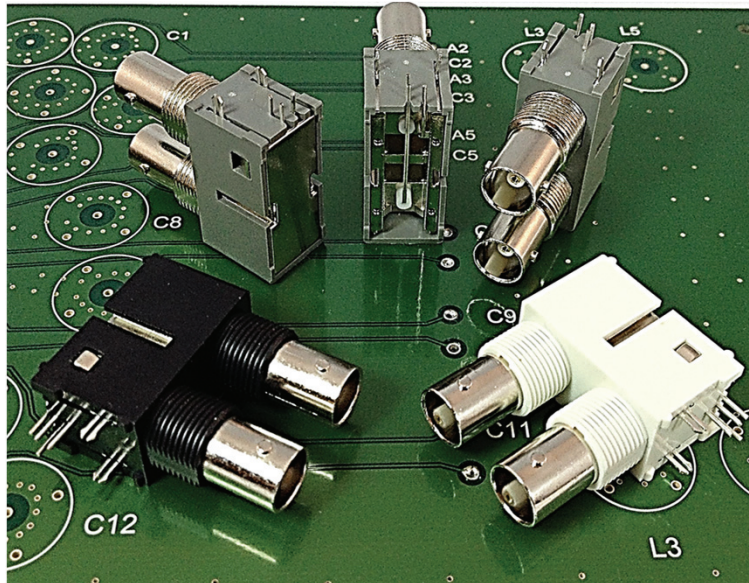

### Product Description

Winchester's Bomar brand 364 Series Dual BNC Right-Angle PCB Jack Connectors are ideal for high-density applications in a wide range of industries including Broadcast, Telecommunications, Test and Measurement, Security, and Medical.

Dual BNC Right-Angle Connectors feature two "vertically stacked" BNC Jack Connectors and consume 50% less PCB real estate as compared to two right-angle connectors mounted side by side.


The 364 Series Dual BNC PCB Jack Connectors are available in 50 Ohm and 75 Ohm impedance in both isolated or panel-ground versions.

Isolated BNC Jacks are made with black or white UL 94V-0 PBT Thermoplastic material.


Panel-ground Dual BNC Jacks feature a nickel-plated Zinc die-cast body and are available with or without a metal shield cover.



- Dual BNC Right-Angle Connectors consume 50% less PCB real estate as compared to two right-angle connectors mounted side by side.



- Snap-in board locks secure connectors to the PCB prior to soldering and prevent the connectors from lifting or leaning out of position during production assembly.



- Panel-ground Jacks are available with or without a rear metal cover which provides EMI shielding as well as protecting the contacts from contaminants.

# Specifications

## Electrical

Impedance: 50Ω / 75Ω Ohms  
 Frequency Range: 50Ω DC – 1 GHz  
 75Ω DC – 1 GHz  
 Working Voltage: 500 VRMS at Sea Level  
 Dielectric  
 Withstanding Voltage: 1500 VRMS at Sea Level  
 Contact Resistance: Center Contact: ≤ 3 Milliohms  
 Insulation Resistance: 5000 Megohms Min  
 Insertion Loss: 0.2dB Max

## Environmental

Temperature Range: - 40° C to +165° C

## Material

BNC Barrel: Zinc Nickel Plated  
 Female Contact: Phosphor Bronze  
 Gold Plated  
 Insulator: Polypropylene

## Mechanical

Center Contact Retention: ≥ 6 lbs.  
 Engagement Force: ≤ 5 lbs.  
 Disengagement Force: ≥ 1.5 lbs.  
 Durability (Mating): 500 Cycles Min




Photo 1




Photo 2




Photo 3





Photo 4

# Part Numbers

Bomar Part Number	Description	Impedance	Body Material	Color	Photo
364A2595*	Dual Right-Angle PCB, Isolated	50 Ohm	Valox	White	1
364A2595B*	Dual Right-Angle PCB, Isolated	50 Ohm	Valox	Black	2
364M2595*	Dual Right-Angle PCB, Panel-Ground	50 Ohm	Zinc	Nickel Plated	3
364M2595FS*	Dual Right-Angle PCB, Panel-Ground Back Cover (Full Shield)	50 Ohm	Zinc	Nickel Plated	4
364A2795*	Dual Right-Angle PCB, Isolated	75 Ohm	Valox	White	1
364A2795B*	Dual Right-Angle PCB, Isolated	75 Ohm	Valox	Black	2
364M2795*	Dual Right-Angle PCB, Panel-Ground	75 Ohm	Zinc	Nickel Plated	3
364M2795FS*	Dual Right-Angle PCB, Panel-Ground, Back Cover (Full Shield)	75 Ohm	Zinc	Nickel Plated	4

\*Mounting Hardware Sold Separately

Lock washer: 364LW  
 Hex Nut: 364NT  
 Spanner Nut: 364KNT  
 Spanner Wrench: BD36400

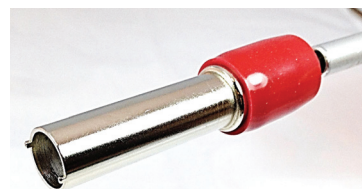

Spanner Wrench BD36400



Winchester Electronics  
 199 Park Road Extension, Suite 104  
 Middlebury, Connecticut 06762  
 203.741.5400 Phone  
 203.741.5500 Fax  
 www.winchesterelectronics.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:*

*Click to view products by [Bomar Interconnect](#) manufacturer:*

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [1200690078](#) [1-201144-1](#) [R107003010W](#) [R110A172100](#)