



PCB 焊盘区  
 下沉定位区  
 RECOMMENDED PCB LAYOUT  
 GENERAL TOLERANCE ±0.05

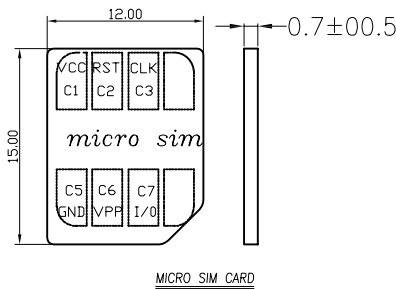

SIM pin assignment	
PIN#	Name
C1	VCC 供电电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 程序电压
C7	I/O 输入输出

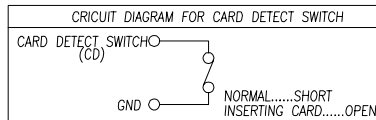

### Specification

#### MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.  
 Contact: Copper Alloy  
 SHELL: SUS

#### PLATING:

Contact: Plated 50u" Ni Overall Contact Au IU  
 Shell: Plated 50u" Ni Overall  
 Plated Iu/Au Selective Contact Area

#### Electrical:

Current Rating : 0.5mA AC/DC max.  
 Voltage Rating : 125V AC/DC  
 Ambient Temperature Range :-20° C +60° C  
 Storage Temperature Range :-40° C +70° C  
 Ambient Humidity Range :95% R.H. Max.  
 Contact Resistance:100m Ω  
 Insulation Resistance:1000M Ω /500VDC  
 产品耐温温度: 260° C - C 34.70±0.5 C  
 Mating Cycles:3000min Insertions

**JB Bossie (博锡)**

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2' X.X" ±0.5'	DRAWN BY :	DATE :	PART NAME: 自弹式 MicroSIM卡卡座 6P	
	CHECKED BY:	DATE :	PART NO.	BX-SIM-1.35H6PJ
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY:	DATE :	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Memory Card Connectors](#) category:*

*Click to view products by [Bossie](#) manufacturer:*

Other Similar products are found below :

[6407-249V-25273P](#) [6407-249V-25343P](#) [6426-201-21343](#) [69.920.0553.0](#) [MCR60A-98D-2.54DSA\(70\)](#) [809180410000000](#) [DM3AT-SF-PEJM5\(41\)](#) [IC11S-BUR-PNEJL\(71\)](#) [C70210M0083692](#) [2041353-2](#) [308-DS1P0811-192](#) [HM2P09PDR360N9LF](#) [10014744-011TLF](#) [11327-001](#) [11327-002](#) [NX1-32T-KT3K\(05\)](#) [95622-003LF](#) [84648-056HLF](#) [CCM03-3109 B LFT](#) [MS3116J10-6PW](#) [2309923-1](#) [61126-050CAHLF](#) [GTFP08432B1HR](#) [G85D1160022HHR](#) [SCE2MSDZN76A121SN](#) [10014744-011ALF](#) [10014744-011LF](#) [10057542-1211FLF](#) [10067972-000LF](#) [10067972-050LF](#) [10122302-20110LF](#) [G85D1162022HHR](#) [TF-05A](#) [M6014-12](#) [XKNANO-1412](#) [SMN-304-ARP6](#) [MIS11-S1F1-2000-A](#) [SMN-308-ARSP7](#) [MCS-302S-KT1B](#) [SMN-308-ACSP7](#) [K-DYX-008](#) [K-DYX-004](#) [C7024-03](#) [SMO-1030](#) [MCS-110-KT](#) [SIM-217](#) [SNO-1355-KT](#) [SMO-1025-P10](#) [SIM-211S-P6](#) [SNO-1440](#)