



**SOD-123FL**


MARKING: F7

**Features**

- Low reverse leakage
- High Forward surge capability
- High reliability
- High temperature soldering guaranteed: 260°C/10 秒
- Lead and body according with Rohs standard

**Mechanical Data**

- SOD 123FL small outline plastic package
- Polarity: Color band denotes cathode end
- Epoxy UL: 94V-0
- Mounting Position: Any

**Maximum Ratings & Thermal Characteristics**

(Ratings at 25°C ambient temperature unless otherwise specified.)




Parameters	Symbol	FR107	Unit
Maximum repetitive peak reverse voltage	VRRM	1000	V
Maximum RMS voltage	VRMS	700	V
Maximum DC blocking voltage	VDC	1000	V
Maximum average forward rectified current	IF(AV)	1.0	A
Non-repetitive Peak forward surge current 8.3 ms single half sine-wave	IFSM	30	A
Typical thermal resistance	RθJA	45	°C/W
Operation junction and Storage temperature range	Tj,TSTG	-55-+150	°C

**Electrical Characteristics**


(Ratings at 25°C ambient temperature unless otherwise specified).

Parameters	Symbol	RF107	Unit
@IF=1.0A Max. forward voltage	VF	1.3	V
@VDC TA=25°C Max. reverse current TA=100°C	IR	5 100	uA
Max. reverse recover time IF=0.5A,IR=1.0A,IRR=0.25A	Trr	500	nS
VR=4.0V, f=1MHz Type junction capacitance	Cj	15	pF

**Characteristic Curves**

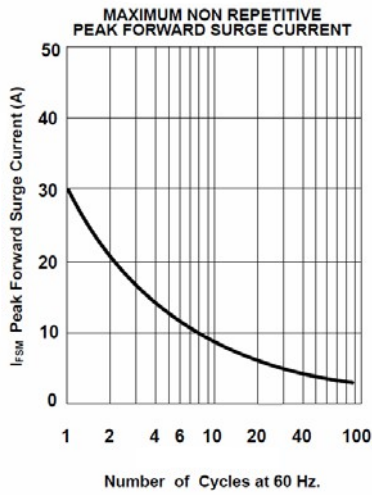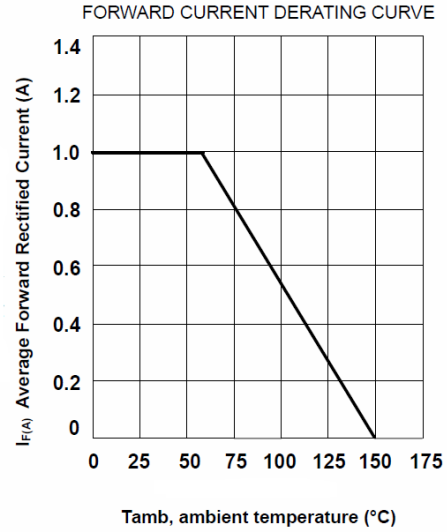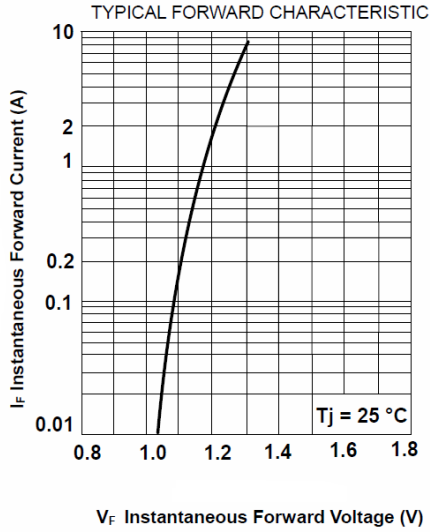

**SOD-123FL PACKAGE OUTLINE** Plastic surface mounted package

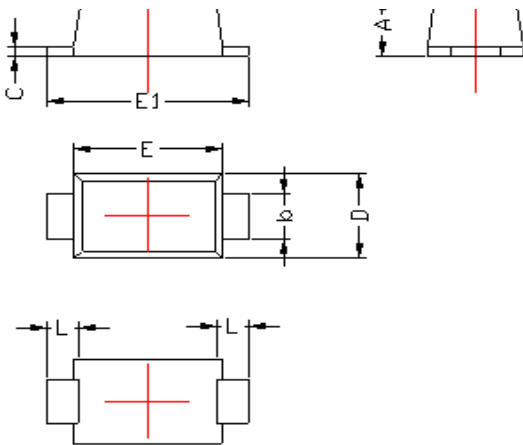

SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	1.20	1.40
b	0.80	1.10
C	0.15	0.25
D	1.75	1.95
E	2.70	2.90
E1	3.50	3.90
L	0.35	0.85

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Diodes - General Purpose, Power, Switching category:](#)

*Click to view products by* [Bourne manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RD0506LS-SB-1H](#) [RGP30G-E373](#) [DSE010-TR-E](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [HSC285TRF-E](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMD7000LT3G](#) [FC903-TR-E](#) [1N4449](#) [1N4934-E3/73](#) [1SS226-TP](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)