

### Features

- Shielded construction low radiation
- Separated winding
- High current
- Compact size
- AEC-Q200 compliant
- RoHS compliant\* and halogen free\*\*

SRF9045A Series - Common Mode Chokes


## **Applications**

- EMI suppression power line
- Noise filters power line

#### Electrical Specifications at 25 °C

	Ζ (Ω) @	100 MHz	L (μΗ),		
Part Number	Min.	Тур.	N1/N2 Ref. @ 100 kHz / 0.1 V	DCR (mΩ), N1/N2, Max.	Irms (A)
SRF9045A-701Y	500	700	7.5	10	5

#### **Soldering Profile**

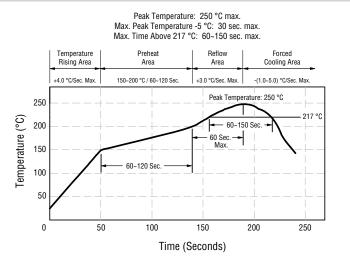


#### **General Specifications**

Rated Voltage
Insulation Resistance
10 MΩ (Min.) @ 100 VDC
Operating Temperature
-40 °C to +125 °C
(Temperature rise included)
Storage Temperature
40 °C to +125 °C
Temperature Rise40 °C at rated Irms
MSL
ESD Classification (HBM)N/A


#### Materials

Core	Ferrite
Wire	Enameled copper
Terminal Finish	Sn
Packaging1000	pcs. per 13-inch reel

#### **Electrical Schematic**



#### Recommended Layout




#### WARNING Cancer and Reproductive Harm www.P65Warnings.ca.gov

\* RoHS Directive 2015/863, Mar 31, 2015 and Annex.
\*\* Bourns considers a product to be "halogen free" if
(a) the Bromine (Br) content is 900 ppm or less; (b)
the Chlorine (Cl) content is 900 ppm or less; and (c)
the total Bromine (Br) and Chlorine (Cl) content is
1500 ppm or less.

Specifications are subject to change without notice. Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.


#### **Product Dimensions**

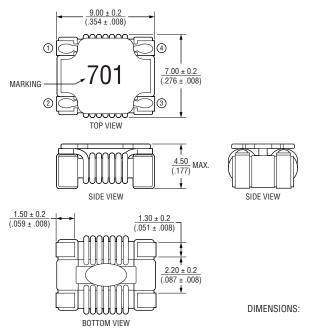


IS: <u>MM</u> (INCHES)

# SRF9045A Series - Common Mode Chokes


# BOURNS®




#### Temperature Rise Plots



#### **Packaging Specifications**

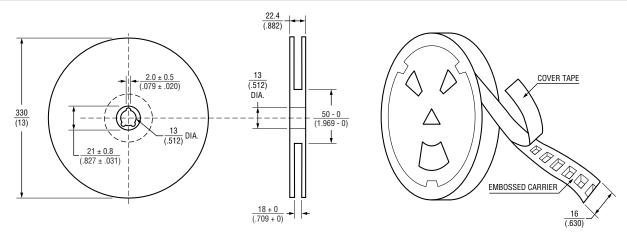

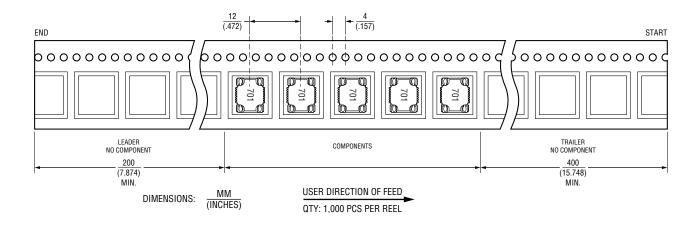

#### 11/20

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

## **Legal Disclaimer Notice**

This legal disclaimer applies to purchasers and users of Bourns<sup>®</sup> products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns<sup>®</sup> products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns<sup>®</sup> products.

The characteristics and parameters of a Bourns<sup>®</sup> product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns<sup>®</sup> product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns<sup>®</sup> product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns<sup>®</sup> product with other components of a Bourns<sup>®</sup> product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns<sup>®</sup> product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns<sup>®</sup> product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns<sup>®</sup> product to meet the requirements of such industry standard or particular qualification. Users of Bourns<sup>®</sup> products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns<sup>®</sup> products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns<sup>®</sup> products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns<sup>®</sup> standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns<sup>®</sup> standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns<sup>®</sup> standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns<sup>®</sup> standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns<sup>®</sup> standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns<sup>®</sup> standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns<sup>®</sup> standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns<sup>®</sup> custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns<sup>®</sup> custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns<sup>®</sup> standard products shall also apply to such Bourns<sup>®</sup> custom products.

Users shall not sell, transfer, export or re-export any Bourns<sup>®</sup> products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns<sup>®</sup> products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns<sup>®</sup> products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns<sup>®</sup> products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <u>http://www.bourns.com/legal/disclaimers-terms-and-policies</u> PDF: <u>http://www.bourns.com/docs/Legal/disclaimer.pdf</u>

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Common Mode Chokes / Filters category:

Click to view products by Bourns manufacturer:

Other Similar products are found below :

 74279408
 PE-62911NL
 PE-64683
 ST6118T-R
 T8114NLT
 RD5122-10-6M0
 TCM0806G-350-2P-T
 TCM0806G-650-2P-T
 IND-0110

 UAL21V07012500
 UAL21VR0802000
 UAL24VR06500CH
 UALSC023000000
 UALSC1020JH000
 UALSC1520JH000

 UALSU16VD30030
 UALSU16VD40010
 UALSU9H0305000
 UALSU9HF060300
 UALSU9VD070100
 36-00037
 5701610000

 UALW21HS072450
 UALSU9VD070400
 UALSU9HF050500
 UALSU9H0208000
 UALSCF25081300
 UAL24VK06450CH

 PLT10HH501100PNB
 PLT10HH401100PNB
 PLT10HH1026R0PNB
 PE-67531
 EXC-X4CH120X
 TLH10UB
 113<0R5</td>
 2752041447

 2752045447
 CMS3-11-R
 7351V
 CMF16-153131
 744252510
 T8116NLT
 FE2X10-4-2NL
 744253200
 744253101
 744252220
 TX8111NLT

 UAL30VR3500470
 CTX01-19077-R
 T8003NLT
 CTX01-13663
 18116NLT
 FE2X10-4-2NL
 744253200
 744253101
 744252220
 TX8111NLT