

# 8500 Rocker Switches - Miniature 10A 250Vac Single & Double Pole

rocker switches



- ▶ Miniature rocker switch
- ▶ Ratings up to 15A, 250Vac
- ▶ Single & double pole in same body size
- ▶ Illuminated & non-illuminated
- ▶ Matching indicators
- ▶ Industry standard panel cut-out
- ▶ Rotary and push button actuator options
- ▶ Panel cut out: 19.3 x 12.9



**10(6)A 250Vac T125** (non lit types)  
**6(4)A 250Vac T125 5E4 (50,000 Operations)** (non lit types)  
**10(6)A 250Vac T100** (lit types)



**UL CSA 15A Non Ind 250Vac, 14A Ind 250Vac, 10A 277Vac**  
**UL CSA 250Vac 1/2hp, 125Vac 1/4hp**  
**UL 105°C, (non lit) file E45221, CSA file LR10990**



**RoHS compliant**

3mm contact gap.  
 Technical data on pages 4 & 5 (switches), 6 (indicators).

NON-LIT		LIT		
<b>B</b> BLACK	<b>B</b> BLACK	<b>A</b> AMBER	<b>A</b> AMBER	□ 'X' ROCKER COLOR R,G,W,B
<b>R</b> RED	<b>R</b> RED	<b>C</b> CLEAR	<b>C</b> CLEAR	<b>2</b> 125V NEON
<b>W</b> WHITE	<b>W</b> WHITE	<b>G</b> GREEN	<b>G</b> GREEN	<b>3</b> 250V NEON
		<b>R</b> RED	<b>R</b> RED	<b>7</b> 12V INCANDESCENT

## H 8553 V B B R 2 551W

TERMINAL CODE    FUNCTION CODE    ROCKER CODE    BODY CODE    BODY COLOR    ROCKER COLOR    LAMP VOLTAGE OR "ON LIGHT"    LEGEND & OPTIONS

### ORDER FORMAT

TERMINAL	FUNCTION	ROCKER
<b>H</b>  4.8 x 0.8 8.5	Approvals & ratings vary with function  ON OFF Switches are ON when pressed over terminal 1	<b>H</b> Slotted for custom caps 
<b>K</b>  2.6 1.5 8.5 2.8 x 0.8	<b>8500</b>  ON - OFF Single pole (Uses terminals 1a & 2a)	<b>R</b> Semi-rotary (not lit) 
<b>L</b>  3.2 2.6 2.8 x 0.8 Right angle version of K terminal available on 8500 only	<b>8503</b>  ON (lit) - OFF Single pole	<b>D</b> Paddle lever (not lit) 
<b>R</b>  1.5 3.1 4.5 4.8 x 0.8	<b>8550</b>  ON - OFF Double pole	<b>V</b> Curved (not lit) 
<b>T</b>  R1.0 R0.8 3.5 8.5 Solder	<b>8553</b>  ON (lit) - OFF Double pole	<b>V</b> Curved (lit) 
	<b>8580</b> Available with H terminals only  Indicator 	<b>X</b> Two colour (not lit) 
		<b>A</b> Softline lens 
		<b>P</b> Push button operation (8500 only) See drawing opposite



H8500VB ---  
T8500VB ---



H8550VB ---  
T8550VB ---



H8550HB ---  
T8550HB ---



H8550XB ---  
T8550XB ---



H8550RB Semi-rotary  
A splash proofing option



H8500PO ---  
Pushbutton option




H8553VB ---  
T8553VB ---




H8580AB ---

**BODY**

**B**  
Standard body with terminal barrier

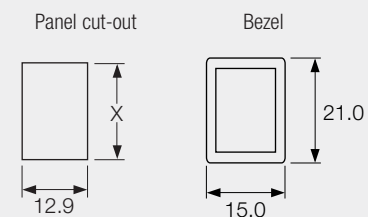

**BC**  
Body without terminal barrier

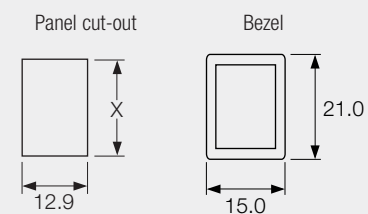

Dimensions for snap-in fixing

Panel thickness	Dim X
0.75-1.25	19.1/19.2
1.25-2.00	19.3/19.4
2.00-3.00	19.7/19.8

Cut-outs must be punched in the direction of insertion

**OPTIONS**

**Finish**  
Matt finish only

**Color**  
Call factory for custom colors  
A full range is available for large orders



**Legend printing**  
Select from the examples or call the factory for custom legends

**Lamp voltage**  
Call factory for details of other available voltages

**Protective cover L167**  
(designed to IP65)  
Snaps on to bodies with V or X style rockers and A lens but reduces panel thickness by 0.8mm



**DIMENSIONS (mm)**

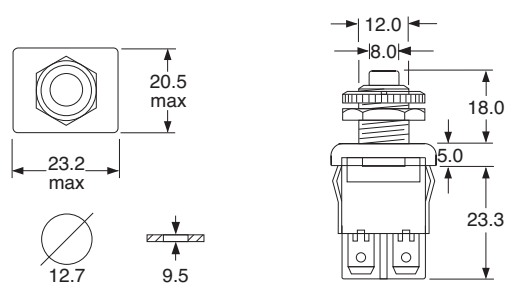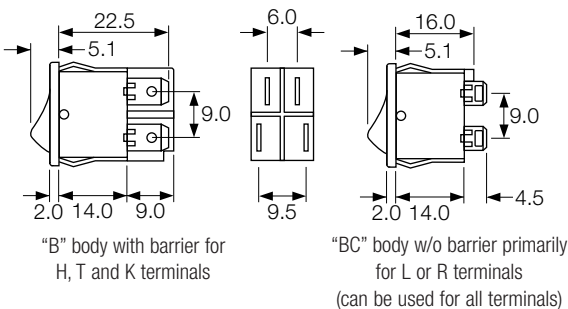

'PO' Actuator and body - push button function (8500 only)

**Examples of our range of legend printing**  
( ) is legend color B-Black, W-White, R-Red



551(W)

080(W)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rocker Switches](#) category:*

*Click to view products by [Bulgin](#) manufacturer:*

Other Similar products are found below :

[LTILA6E-1S-WH-RC-FN12VXCR1](#) [6-1571986-9](#) [8055K23Z7V](#) [8055K52Z7V](#) [8138K20E6M50](#) [PREDD5-07F-BB0GW](#) [999-16716-002](#)  
[999-16716-003](#) [999-16716-004](#) [A101J1V3Q004](#) [A101J2ZQ004](#) [A101J51CB0004](#) [A103J1ZQ004](#) [A201J1AQ004](#) [A201J50ZQ004](#)  
[A435S1YZQ](#) [H8653VBBG2577W](#) [HB130CHNWWNAAC](#) [R13112ABB-602W](#) [1251.0303](#) [1352.0107](#) [AML25GBF2AA03GR](#) [1500G51E](#)  
[1571099-3](#) [1571987-4](#) [1571987-5](#) [1571988-5](#) [B123J77V7B2](#) [B226J50W4Q22P](#) [B433J37ZQ22M](#) [160212E](#) [1634200-7](#) [1801.1164](#) [PANEL-](#)  
[PLUG-VHP-BLACK](#) [PANEL-PLUG-VHP-WT](#) [K2ABAAAAAA](#) [250011E714](#) [2600R21E](#) [260413E](#) [2639LH/2A7/127000L0](#) [LL3AZXX-](#)  
[100-XGT1](#) [LL3AZXX-100-XHS1](#) [LL3AZXX-100-XSD1](#) [30-695B](#) [160311E](#) [A103J3ZQ004](#) [A201J61ZQ0004](#) [1852.1102](#) [1890.1104](#)  
[191.081.011](#)