

# 2000 Slide Switches - Snap-in & 2 hole fixing 10A 250Vac



- ▶ 2 way 'voltage selector'
- ▶ Ratings up to 10A, 250V ac
- ▶ Snap in and flange mounting
- ▶ PCB & solder terminals
- ▶ 2 and 3 position
- ▶ Choice of circuits
- ▶ Choice of actuators



10 A 250Vac T85  
6(3)A 250Vac T85



UL CSA 16A 250Vac Non Inductive  
UL CSA 4A 300Vac  
UL65°C, file no. E45221, CSA file no. LR10990



RoHS compliant


μ contact gap

Please specify: Standard action (SP116) or light action (SP118).  
2000 series lubrication is inorganic and does not degrade plastics.

Technical data on pages 4 & 5.

115/230 is preferred legend

**B** BLACK  
**W** WHITE  
**R** RED

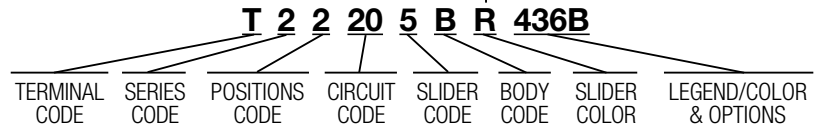

## ORDER FORMAT

▶ TERMINAL	▶ SERIES	▶ POS'N	▶ CIRCUIT <small>Viewed from back</small>	▶ SLIDER											
<p><b>K</b></p> <p>2.8 x 0.8</p>		2 Switching positions	<p><b>10</b></p>	<b>0</b>	<b>6</b>	<b>C</b>	<b>L</b>	<b>S</b>	<b>2</b>	<b>7</b>	<b>D</b>	<b>M</b>	<b>T</b>		
				<b>2</b>	<b>3</b>	<b>8</b>	<b>E</b>	<b>N</b>	<b>4</b>	<b>9</b>	<b>H</b>	<b>P</b>	<b>R</b>		
				<b>3</b>	<b>4</b>	<b>5</b>	<b>A</b>	<b>K</b>	<b>R</b>						
				<b>10</b>	<b>20</b>	<b>30</b>	<b>40</b>								
<p><b>R</b></p> <p>2.8 x 0.8</p>			<p><b>10</b></p>	<b>0</b>	<b>6</b>	<b>C</b>	<b>L</b>	<b>S</b>	<b>2</b>	<b>7</b>	<b>D</b>	<b>M</b>	<b>T</b>		
				<b>2</b>	<b>3</b>	<b>8</b>	<b>E</b>	<b>N</b>	<b>4</b>	<b>9</b>	<b>H</b>	<b>P</b>	<b>R</b>		
				<b>3</b>	<b>4</b>	<b>5</b>	<b>A</b>	<b>K</b>	<b>R</b>						
				<b>10</b>	<b>20</b>	<b>30</b>	<b>40</b>								
<p><b>T</b></p> <p>Solder</p>	2		<p><b>10</b></p>	<b>0</b>	<b>6</b>	<b>C</b>	<b>L</b>	<b>S</b>	<b>2</b>	<b>7</b>	<b>D</b>	<b>M</b>	<b>T</b>		
				<b>2</b>	<b>3</b>	<b>8</b>	<b>E</b>	<b>N</b>	<b>4</b>	<b>9</b>	<b>H</b>	<b>P</b>	<b>R</b>		
				<b>3</b>	<b>4</b>	<b>5</b>	<b>A</b>	<b>K</b>	<b>R</b>						
				<b>10</b>	<b>20</b>	<b>30</b>	<b>40</b>								
<p><b>X</b></p> <p>PCB 0.8 Sq. For mounting stability switches have extra "support" terminals</p> <p>* Nominal - Dimension varies with body type. For exact figure call factory</p>		3 Switching positions	<p><b>10</b></p>	<b>0</b>	<b>6</b>	<b>C</b>	<b>L</b>	<b>S</b>	<b>2</b>	<b>7</b>	<b>D</b>	<b>M</b>	<b>T</b>		
				<b>2</b>	<b>3</b>	<b>8</b>	<b>E</b>	<b>N</b>	<b>4</b>	<b>9</b>	<b>H</b>	<b>P</b>	<b>R</b>		
				<b>3</b>	<b>4</b>	<b>5</b>	<b>A</b>	<b>K</b>	<b>R</b>						
				<b>10</b>	<b>20</b>	<b>30</b>	<b>40</b>								



T22208E



T22308E



T2230MF



T22205B




T22305B




T23204B

**BODY**

**B** With fixing holes




**E** Snap-in



Cut-outs must be punched in the direction of insertion

**F** Snap-in (single pole ON OFF only)



Cut-outs must be punched in the direction of insertion

**OPTIONS**


**Color**

For custom slider colors call the factory. A full range is available for large orders

Standard body color is black

**Legend printing**

2 Frequently requested legends are shown




**436()** **437()**

( ) is legend color  
(B) - Black  
(W) - White  
(R) - Red

Please call the factory for custom legends


**DIMENSIONS (mm)**

**2 Pos B**


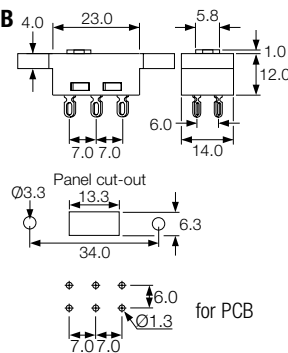


**Cut-out / PCB Matrix**

**3 Pos B**


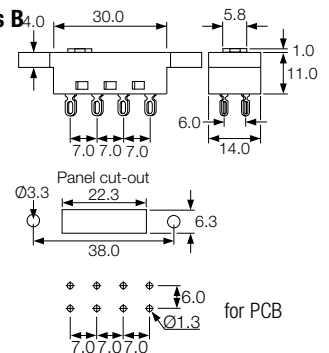


**2 Pos E**



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

**2 Pos F**



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

for PCB, call factory for details

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Slide Potentiometers](#) category:*

*Click to view products by [Bulgin](#) manufacturer:*

Other Similar products are found below :

[M22](#) [MHS133K](#) [MSS12A](#) [MSSA22](#) [M42A](#) [MSS42G](#) [SS-4928](#) [RSA0K11A901L](#) [SLB124145](#) [SLB1340R45](#) [RA6020F-10-20D1-B50K](#)  
[RA4520F-10-20D1-B50K](#) [TSS11AGPC](#) [X22205CAAF](#) [448XC2103BDN](#) [X22205A-437W](#) [T22205BAAE](#) [SS-22J08-G5](#) [X22205AAAL](#)  
[K22208EAAG](#) [PS15-10PC1BR10K](#) [1101M1S3ZQI2](#) [1201M1S1ZBE2](#) [1101M2S4AGE2](#) [1101M2S6ABE2](#) [1201M1S3ZBE2](#) [EVA-](#)  
[JQKR15Y14](#) [EVA-NADR15A14](#) [EVA-NADR15D14](#) [EVA-NE4R15A14](#) [EVB-NADR15Y14](#) [ASE1D](#) [ASE1E](#) [ASE2D](#) [MFP113D](#) [MFP130](#)  
[MFP1323](#) [MFP1424](#) [MFP161D](#) [MFP2220R](#) [MFP231P](#) [MFP261N](#) [MMP1010DRA1](#) [MMP131](#) [L202021MS02Q](#) [MFP120](#) [MFP 130 R](#)  
[MFP1323R](#) [MFP140](#) [MFP140-R](#)