



BB830™

830 tie-point Solderless Plug-In BreadBoard with power rails

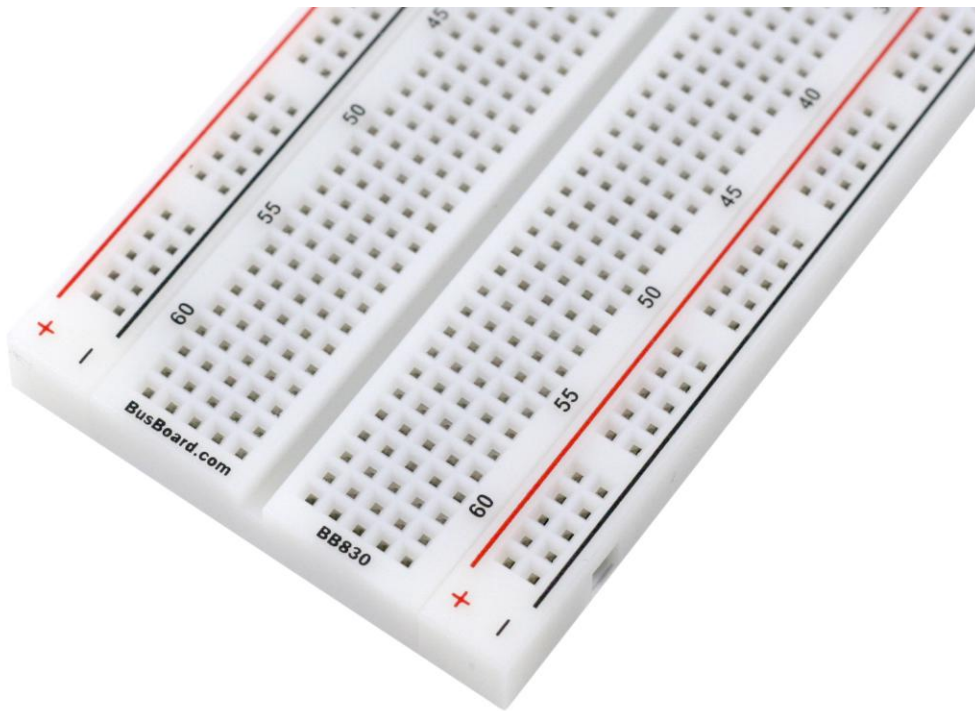

AVAILABLE SKUs:

WHITE

PART#: **BB830**

150 BULK PART#: **BB830x150**

200 BULK PART#: **BB830x200**

TRANSPARENT


PART#: **BB830T**

150 BULK PART#: **BB830Tx150**

200 BULK PART#: **BB830Tx200**

BB830 Features:



- 830 tie points total: 630 tie-point IC-circuit area plus two 100 tie-point distribution strips providing 4 power rails.
- ABS plastic body with black printed legend. Color legend on distribution strips.
- Contacts are Phosphor Bronze with Plated Nickel Finish, rated for 50,000 insertions.
- Rated at 36 Volts, 2 Amps.
- Insertion Wire Size is 21 to 26 AWG, 0.016 to 0.028 inches diameter (0.4 to 0.7mm diameter).
- Peelable adhesive tape backing provided for attaching to a surface. Metal back plate provided.



BB830 Details:

BreadBoard-830 is a solderless (plug-in) breadboard with 830 connection tie-points (i.e. 830 wire insertion holes). It has 4 power rails. Solderless breadboards are great for building and testing new circuits because parts can be easily inserted and removed. They are completely re-usable. The BB830 has a 630 tie-point IC-circuit area plus four 50 tie-point power rails.


The housing is made of white ABS plastic, with a printed legend giving numbers and letters for columns and rows. The internal contacts are phosphor bronze with a plated nickel finish. A peelable adhesive tape backing is provided for attaching it to a surface and an optional metal back plate is provided. BPS BreadBoards are Lead-Free and RoHS Compliant. Finished projects can be moved to a BR1 or SB830 Solderable PC BreadBoard to make them permanent.

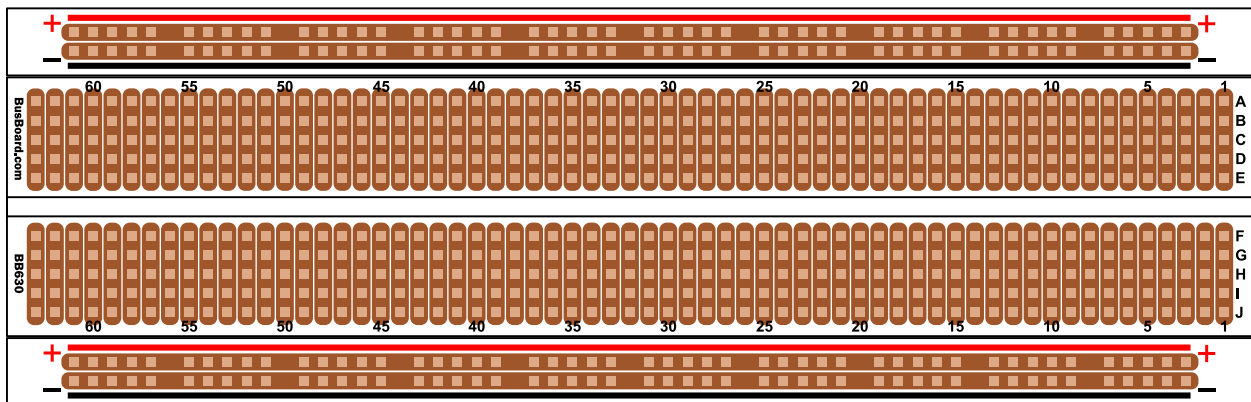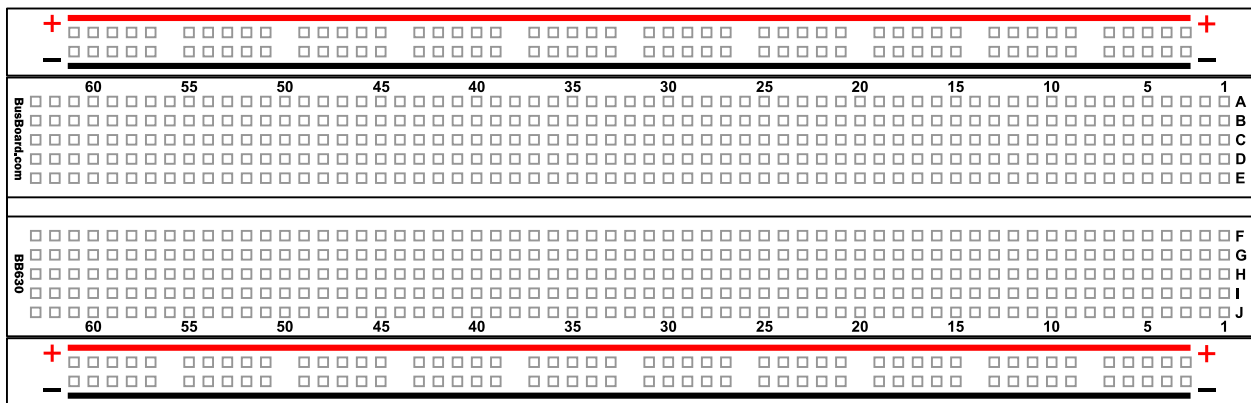


Related Products:



SB830



BB400



BB1460



ZW-MM-10

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for PCBs & Breadboards category:

Click to view products by [BusBoard Prototype manufacturer](#):

Other Similar products are found below :

[8004](#) [8007](#) [8016](#) [8017](#) [8028](#) [8029](#) [1268-12](#) [1268-10](#) [1320833-1](#) [923252-R](#) [3410](#) [3396](#) [8006](#) [8015](#) [8018](#) [8019](#) [8020](#) [1268-19](#) [1268-20](#)
[8026](#) [1239-19](#) [SBBTH1520-1](#) [SBBTH1506-1](#) [SBBTH4080-1](#) [SBBTH3030-1](#) [SBBTH1512-1](#) [SBBTH1508-1](#) [SBBSM2120-1](#) [SBB2808-1](#)
[SBB2805-1](#) [SBB1605-1](#) [SBB1602-1](#) [SBB1005-1](#) [SBB1002-1](#) [3426](#) [32P15WE](#) [ZAS1X206203XRPU160](#) [SBBTH3040-1](#) [SBB0004-1](#)
[SBB830-QTY10](#) [7115](#) [923749-I](#) [RE013-LF](#) [RE014-LF](#) [RE015-LF](#) [RE1210-LF](#) [RE200-C3](#) [RE210-S1](#) [RE317-HP](#) [RE438-LF](#)