



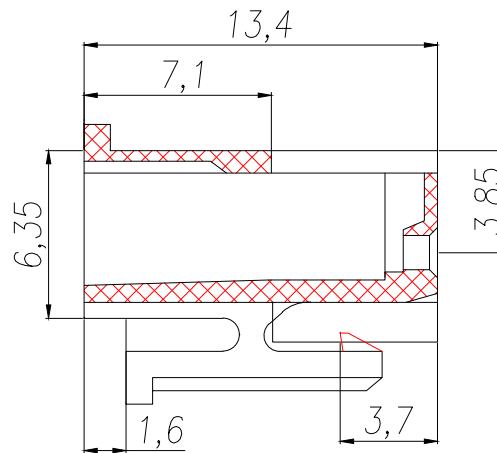

| | | | | | | | | | |
|------|-------------|---|--|---|---------|------|------|---|--|
| A | | B | | C | | D | | E | |
| REV. | DESCRIPTION | | | | ECN NO. | NAME | DATE | | |
| | | | | | | | | | |

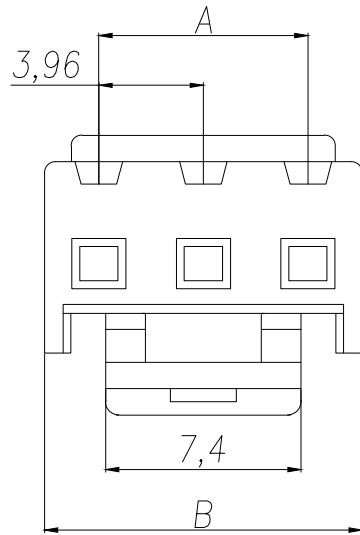

| Part No | Pin | A | B |
|--------------|-----|-------|-------|
| WF-1D396A2P | 2 | 3.96 | 8.07 |
| WF-1D396A3P | 3 | 7.92 | 12.03 |
| WF-1D396A4P | 4 | 11.88 | 15.99 |
| WF-1D396A5P | 5 | 15.84 | 19.95 |
| WF-1D396A6P | 6 | 19.8 | 23.91 |
| WF-1D396A7P | 7 | 23.76 | 27.87 |
| WF-1D396A8P | 8 | 27.72 | 31.83 |
| WF-1D396A9P | 9 | 31.68 | 35.79 |
| WF-1D396A10P | 10 | 35.64 | 39.75 |
| WF-1D396A11P | 11 | 39.6 | 43.71 |
| WF-1D396A12P | 12 | 43.58 | 47.67 |

技术参数:
 PIN数: 2~12
 适用线规: AWG22#~18#
 适用基板厚度: 1.6mm
 温度范围: -25℃~85℃
 额定电压: 250V AC/DC
 额定电流: 7.5A
 接触电阻: ≤0.015 Ω
 绝缘电阻: ≥1000N Ω
 耐压: 1500V AC/minute
 材料: (Nylon)66UL94V-2(0)

| | | | | | | |
|-------------------|-------|---|---------------|----------------|---------------|--|
| GENERAL TOLERANCE | | DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD | | | |   |
| DIM. | TOL. | TITLE: VH3.96MM HOUSING | | | | |
| X | | DWG. NO.: WF-1D396ANP | | DRAWN: MAX | | |
| X.X | ±0.30 | PART NO.: WF-1D396ANP | | CHECKED: ELLA | | |
| X.XX | ±0.25 | UNIT: mm | | SCALE: none | SHEET: 1 of 1 | |
| X.XXX | ±0.15 | DWG. SIZE: A4 | LAYER: bxconn | APPROVED: WILL | | |
| GENERAL ANGLE: | ±3° | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [BXCONN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)