


Midi-Contactors

Auxiliary contacts/contact blocks characteristics

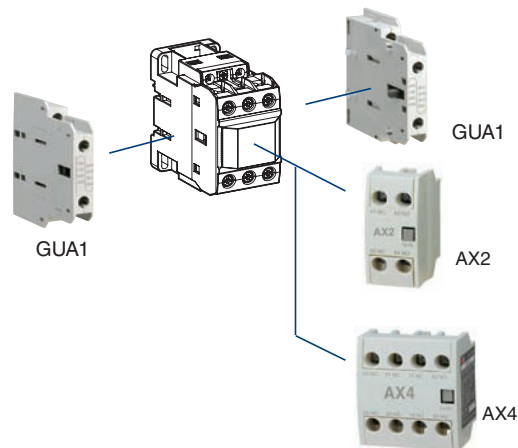

Contactor frame	
Contactor types	
Number of auxiliary contact	
Normally open	[EA]
Normally closed	[EA]
Auxiliary contact blocks, optional	
Type	
Number of auxiliary contact	
Normally open	[EA]
Normally closed	[EA]
Characteristics	
Rated operational voltage, U _e [V]	
Rated insulation voltage, U _i	
Conforming to IEC 947-1	[V]
Conforming to UL, CSA	[V]
Operating current frequency [Hz]	
Short-circuit protection	
Minimum switching capacity	
U min.	DC [V]
I min.	[mA]
Thermal current, I _{th} [A]	
Operational current	
AC15 duty (A600)	120V [A]
	240V [A]
	380V [A]
	480V [A]
	600V [A]
DC13 duty (P600)	125V [A]
	250V [A]
	440V [A]
	500V [A]
	600V [A]
Lifetime (mil.operations)	
AC15 duty	220V
	440V
DC13 duty	220V
	440V
Operation cycles per hour	


12AF		32AF		63AF		95AF		
GC 9 GC12		GC18 GC25 GC32		GC35 GC40 GC50 GC63		GC65 GC75 GC85 GC95		
1 (standard) or 1 (optional)		1 1		2 2		2 2		
AX2		AX4		GUA1				
AX2		AX4		GUA1				
2	1	0	4	3	2	1	0	1
0	1	2	0	1	2	3	4	1
690								
600								
1000V								
25~400								
gLgG fuse: 16A (conforming to IEC EN947-5-1)								
U min.		DC		24		17		
I min.				10		5		
Thermal current, I _{th}				16				
Operational current				6				
AC15 duty (A600)				3				
				1.9				
				1.5				
				1.2				
DC13 duty (P600)				1.1				
				0.55				
				0.31				
				0.27				
				0.2				
Lifetime (mil.operations)				0.5				
AC15 duty		220V		0.5				
		440V		0.5				
DC13 duty		220V		0.5				
		440V		0.5				
Operation cycles per hour				1800				

Midi-Contactors

Accessories

Auxiliary contact blocks

for contactors and reversing contactors

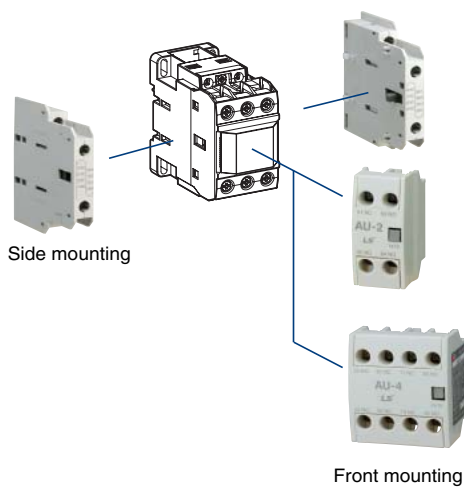

Using contactors	Mounting	Number of contacts per block	Composition		Type	Weight
			NO	NC		g
Contactors and reversing contactors GC9 ~ 95 GC9R ~ 95R	Front	2	1	1	AX2	28
			2	-		
	4	2	2	AX4	50	
		1	3			
4		-				
3	4					
Side	2	1	1	GUA1	53	



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Relay Sockets & Fixings](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[M41G](#) [7-1616360-5](#) [8000-DG2-5](#) [GDA12HA](#) [GDA12HD](#) [GDA12SA](#) [GDA12SD](#) [GDA16HD](#) [GDA22HA](#) [GDA95A](#) [GDA95D](#) [GFX20](#)
[GUA1](#) [GUA2-11](#) [GUA2-20](#) [GUA4-04](#) [GUA4-31](#) [GUM5R](#) [GUR-120](#) [GUR-24](#) [GUR-240](#) [GUR-277](#) [GURX-277](#) [GUW12](#) [GUW95](#)
[GUZ32S](#) [GUZ63L](#) [GUZ95L](#) [AS-11](#) [AX-4MS-40](#) [1611434-8](#) [2-1608090-3](#) [PB-16](#) [SM2S-61](#) [SQ9Z-C](#) [SYSWINSMP](#) [AR-12MW](#)
[GDA16HA](#) [GDA16SA](#) [GDA16SD](#) [GDA22HD](#) [GDA22SA](#) [GDA22SD](#) [GDA32HA](#) [GDA32HD](#) [GDA32SA](#) [GDA32SD](#) [GDA63A](#) [GDA63D](#)
[GFX02](#)