

Digital Surface Resistance Meter with 2 x 5 LB Weighted Probes

Description

Digital Surface Resistance Meter with 2 x 5 LB Weighted Probes. Used to test ESD mat resistance, ESD foam resistance, or surface resistance of many other materials to determine if they are conductive or static dissipative.

Specifications

Measuring Range:	10^3 to 10^{12} ohms
Resistance Error Range:	+/- 20%
Response time of resistance measurement:	5s
Measuring temperature range:	0C to 50C (32F to 122F)
Measuring humidity range:	0-100% RH
Measuring precision of temperature:	+/- 2C
Power supply:	requires one 9V battery, not included
Dimensions:	180 x 100 x 60 mm
Total Weight (including case):	5.9 kg



Parts Included

CQ-SRM-2 surface resistance meter
2 x 5lb weights
2 x Measurement Cables

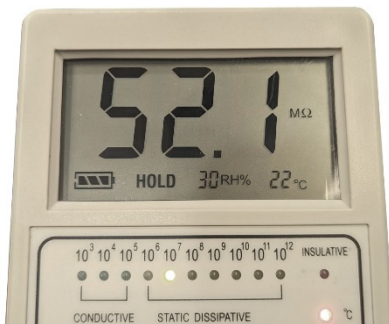


Image 1: Resistance on an ESD work mat (static dissipative)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Multimeters](#) category:

Click to view products by [Chip Quik](#) manufacturer:

Other Similar products are found below :

[2727795](#) [2727486](#) [40705X](#) [3026976](#) [UT334A](#) [FMHT82565-0](#) [SEFRAM7212](#) [45215](#) [BK391B](#) [BK393B](#) [BK390B](#) [1664FC](#) [SCH](#) [FTT](#) [KIT](#)
[BK394B](#) [KPS-MT460](#) [KPS-MT480](#) [RS3252](#) [34420A](#) [1000-219](#) [1012-597](#) [1013-099](#) [30XR](#) [34XR](#) [35XP](#) [TESTO 745](#) [0590 7450](#) [TESTO](#)
[750-1](#) [0590 7501](#) [TESTO 760-2](#) [0590 7602](#) [440012](#) [AX-174](#) [AX-178](#) [AX-18B](#) [AX-190A](#) [AX-503](#) [AX-507B](#) [AX-594](#) [AX-LCR42A](#) [AX-](#)
[MS8221A](#) [AX-MS8250](#) [AX-T520](#) [AX-T901](#) [AX-T903](#) [BAT-250-EUR](#) [BM525S](#) [BM805S](#) [BM817S](#) [BM827S](#) [BM829S](#) [BM857S](#) [BM859S](#)
[BM867S](#) [33XR](#)